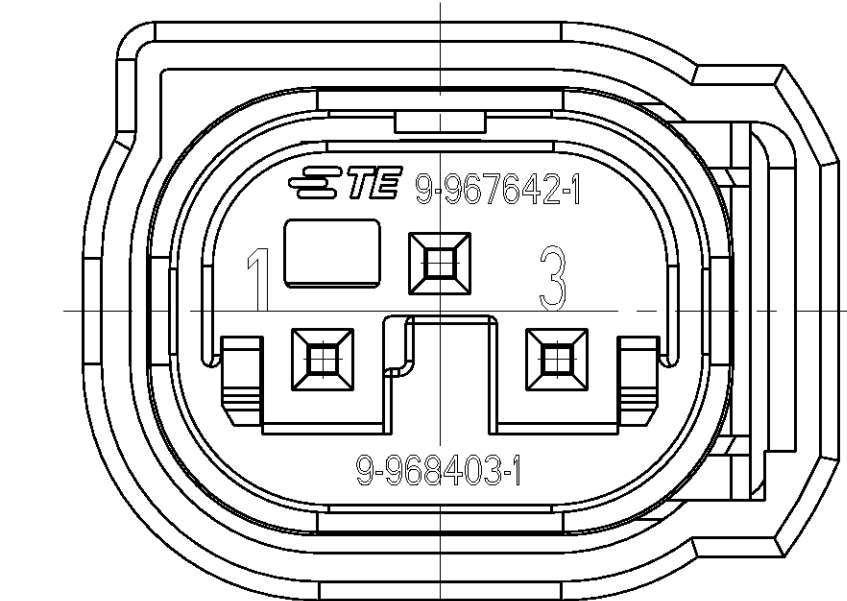




Technical drawings of the components. The left drawing is a top view of the STS 1967642-1 component, showing a circular base with four square mounting holes (labeled 1, 2, 3, 4) and a central rectangular slot. The right drawing is a side view of the 968403-1 component, showing a cylindrical body with a central vertical slot and a horizontal slot.


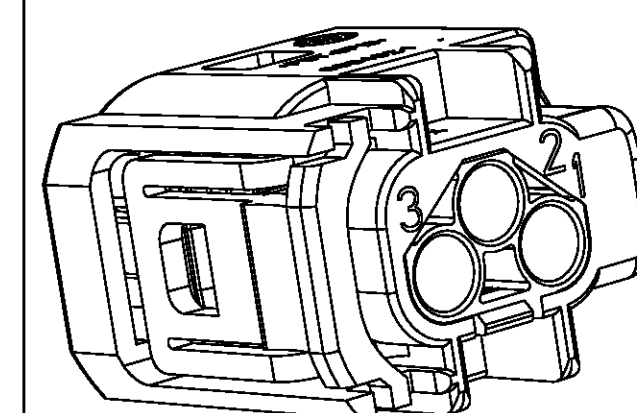
NOTES :
Bemerkungen :

1. ONLY THE GERMAN-LANGUAGE VERSION
SHALL BE BINDING
Maßgebend ist der deutsche Text

2. SUITABLE FOR SOCKET CONTACT FOR SINGLE WIRE SEALING :
Passend zu Buchsenkontakt für Einzeleiterabdrückung :
TE 962895 (DGB 0.2 - 0.5 mm/2) , 965906 (DGB 0.75mm/2)

3. SHROUDED CONNECTION SEE DRAWING :
Kragenschluß siehe Zeichnung : 

4. SUITABLE FOR WIRE SIZE RANGE :
Passend für Leitungsquerschnitt :
T0 / bis 0.75 mm/2

SHROUDED CONNECTION
Kragenanschluss4805 (3/11)