
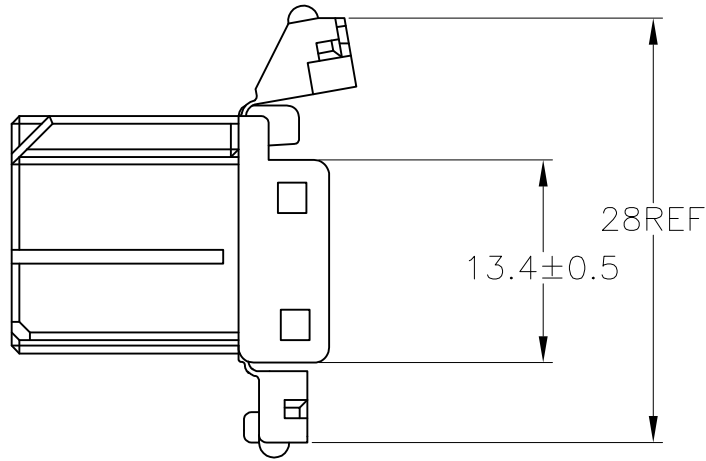
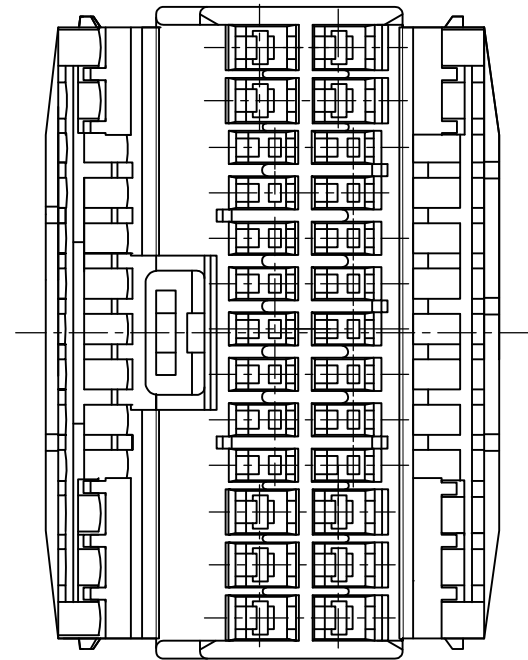
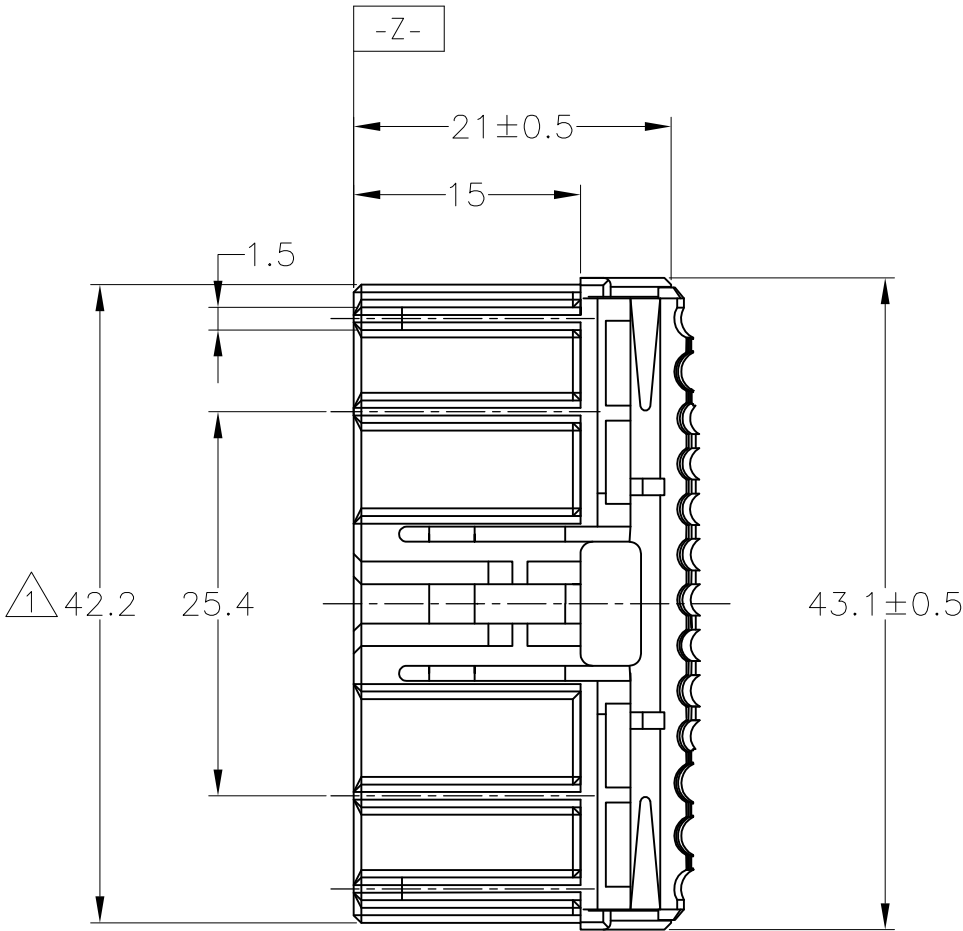



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		E3	REVISED PER ECO—11—005140	28MAR11	RK	HMR

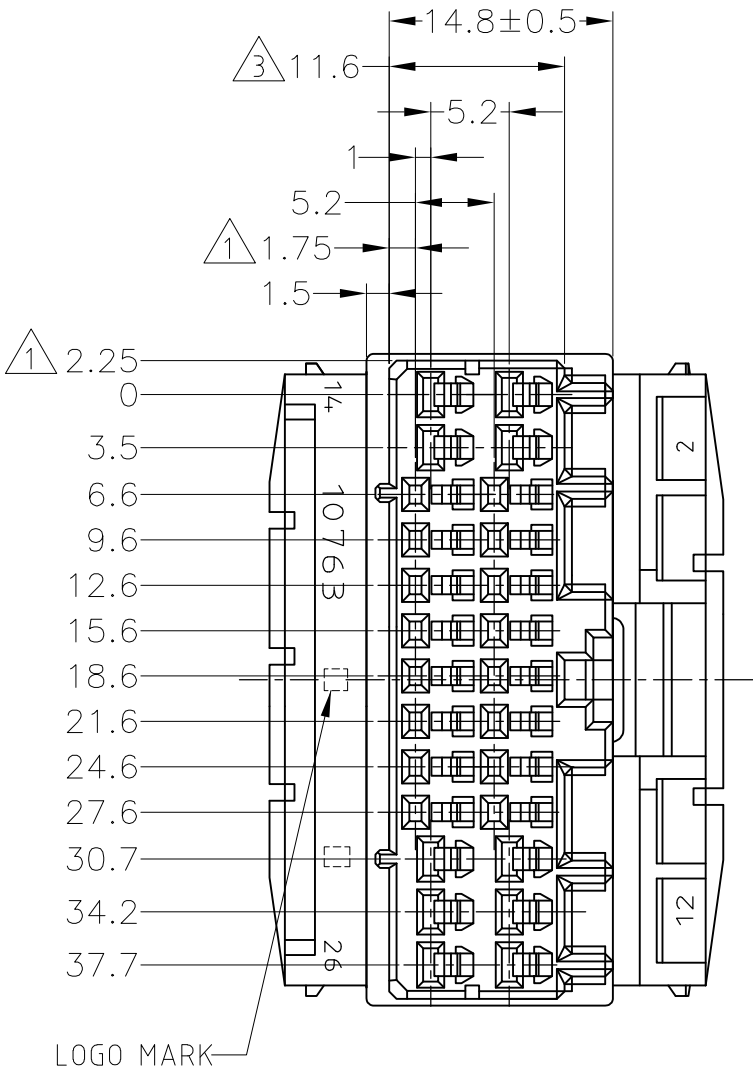

1. MUST BE KEPT BETWEEN -Z- AND 2mm.
2. THE MATING CAP HOUSING PART NUMBER ; 174518
3. APPLIED CONTACT PART NUMBER ; 173631, 173716, 173630, 175094
4. APPLICABLE PRODUCT SPECIFICATION NUMBER ; 108-5280

1. -Z- 面より 2mm の範囲で測定
2. 嵌合相手ハウジング型番 ; 174518
3. 内装するリセプタクルコンタクト型番 ; 173631, 173716, 173630, 175094
4. 適用製品規格番号 ; 108-5280

OBSOLETE	YELLOW	174516-7
	LIGHT GRAY	6-174516-6
	GRAY	174516-6
	BLACK	174516-2
	WHITE	174516-1
	COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA	09JUL10	 TE Connectivity			
DIMENSIONS: mm 		CHK K.BETSUI	09JUL10	NAME HYBRID I/O CONNECTOR 26POSITION PLUG HOUSING			
		APVD K.BETSUI	09JUL10				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC SEE NOTE 4					
		APPLICATION SPEC —					
		SIZE A3	CAGE CODE 00779	DRAWING NO C-174516	RESTRICTED TO —		
		CUSTOMER DRAWING					
MATERIAL PBT		FINISH —	WEIGHT —	SCALE 2:1			
				SHEET 1 OF 1		REV E3	

GENERAL TOLERANCE	
0<* < 10	: ±0.2
10<* < 30	: ±0.25
30<* < 100	: ±0.3
ANGLES	: ±3°