


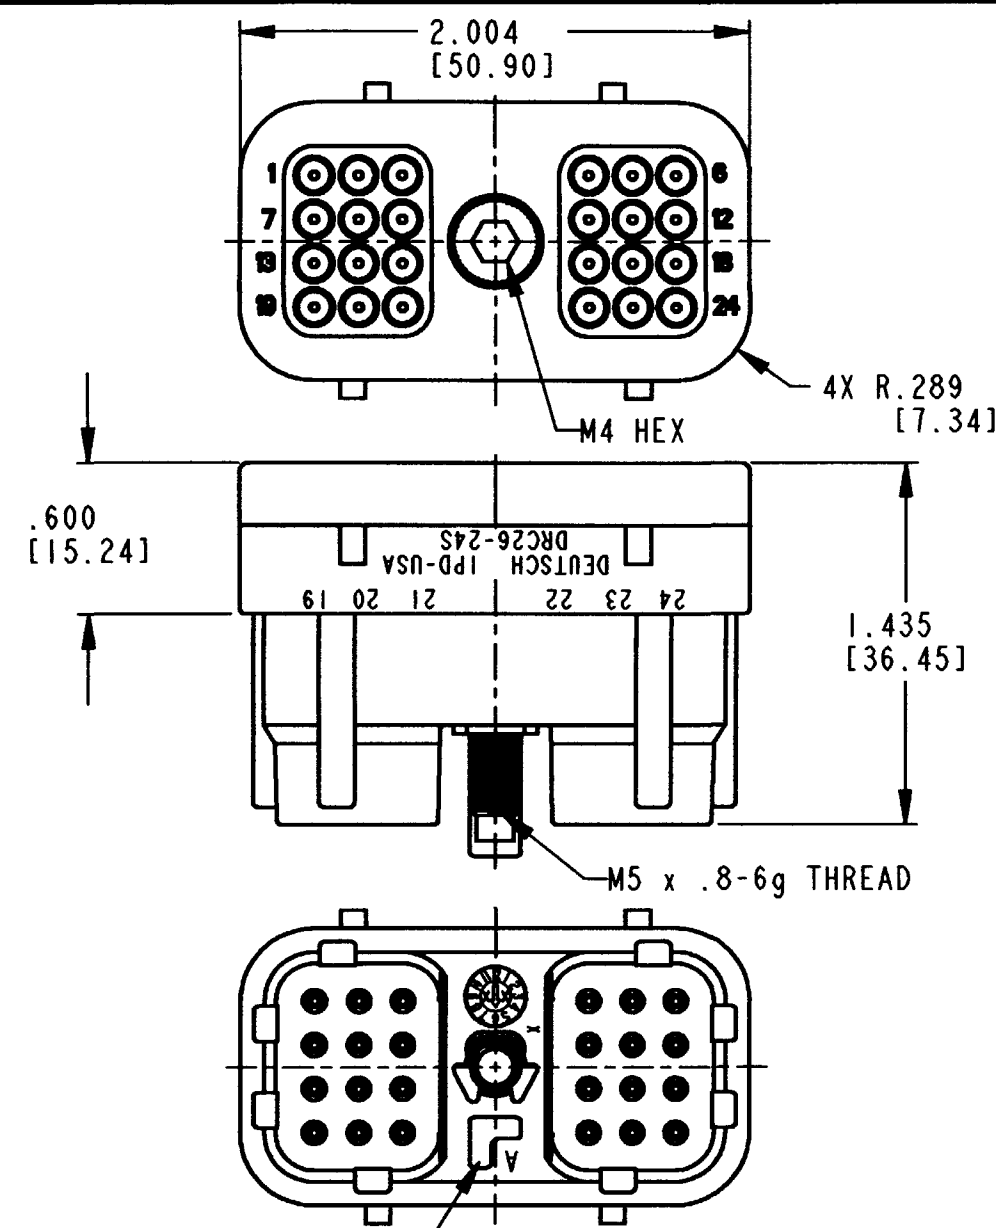



SEE KEY ORIENTATION

4. THIS CONNECTOR WILL ACCOMMODATE THE FOLLOWING:

CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE GAUGE RANGE REF ONLY	6
20	.040 [1.016]	.095 [2.413]	16 THRU 20 [1.00-.50mm ²]	

3. PLUG IS SUPPLIED WITH DUST CAP (NOT SHOWN).
2. DIMENSION TOLERANCE: $\pm .025$ [.64].
1. DIMENSIONS ARE IN INCHES [mm].
- NOTES: UNLESS OTHERWISE SPECIFIED

REV		REVISIONS			
C		SYM	DESCRIPTION	DATE	APPROVED
		NC	NEW RELEASE PER E.O. A14752	12-5-94	R.D.R.
		A	REVISED & REDRAWN PER E.O. P17011	12-22-00	R.D.R.
		B	REVISED PER E.O. P18099	4-7-03	R.D.R.
		C	REVISED PER E.O. P18686	9-27-04	RDR

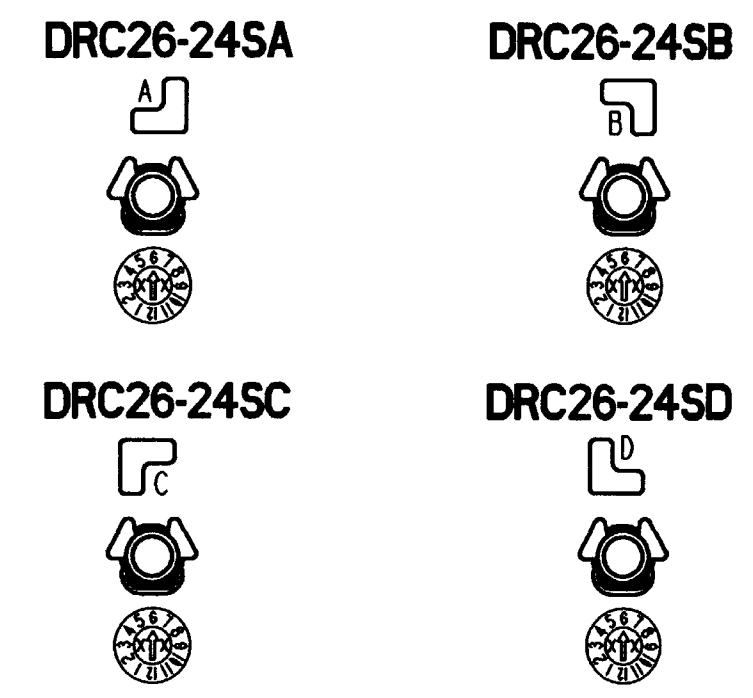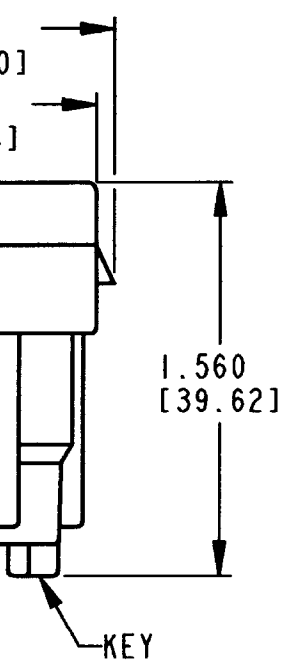

8. MATERIAL: HOUSING: PLASTIC (BLACK); BOLT: STAINLESS STEEL; CLIP: STEEL; GROMMET: RUBBER.
7. THIS PLUG MATES WITH DRC23-24P*----- RECEPTACLE. (* = A,B,C,D KEYS; ----- = ALL MODIFICATIONS)
6. FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
5. RECOMMENDED RETAINING BOLT TORQUE: 25-28 IN-LB [2.82-3.16 NM].

SIGNATURE & DATE		PLUG 24 CONTACTS, SIZE 20 DRC SERIES ENVELOPE	CP		MATL. CODE	
DR	D. MEYER 11/29/00		The Deutsch Company DEUTSCH I.P.D. 3850 INDUSTRIAL AVE. HEMET, CALIF. 92545			
CHK	B. Meyer 9/20/04					
PE	D. Meyer 9/20/04					
APPD	R. Reed 9-27-04		B	DRC26-24S*		
SCALE	NONE WT	DWG SIZE				