

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT — By —

LOC
JDIST
—




REVISIONS

変更


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E6	REVISED	ECR-13-008452	23MAY2013	TS KB

WIRE RANGE ID MARK
("M" SIZE MARK)
(STAMPED ON BOTTOM)


端子識別マーク "M"
(底面に刻印)

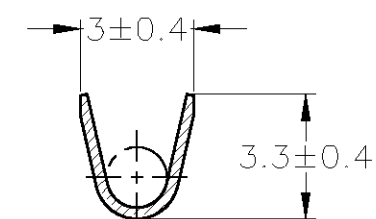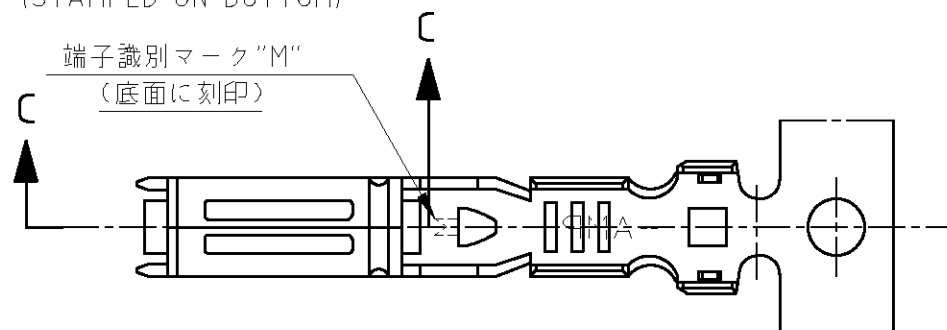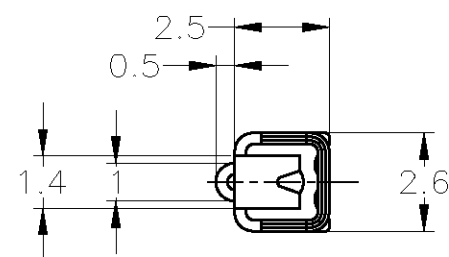


断面 A-A
SECT A-A

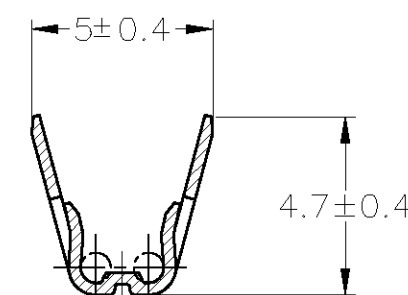


断面 B-B
SECT B-B



断面 C-C
SECT C-C



断面 A-A
SECT A-A
(175027のみ適用)
(ONLY 175027)

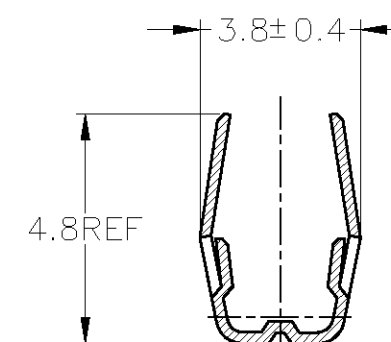

断面 B-B
SECT B-B
(175027のみ適用)
(ONLY 175027)

1. 製品規格 ; 108-5216, 108-5231, 108-5264, 108-3371

2. 部分金めっき

3. 取付適用規格 ; 114-5091

4. 識別用金めっき (全周)

5. 部分金めっき (両側のみ)

1. SPEC; 108-5216, 108-5231, 108-5264, 108-3371

2. SELECTIVE GOLD PLATING

3. APPLICATION SPEC; 114-5091

4. GOLD PLATING FOR DISCERNMENT (ALL AROUND)


5. SELECTIVE GOLD PLATING (ONLY BOTH SIDES OF THE BOX)

WIRE RANGE
0.5~1.25mm²
(AWG#20-#16)

INSULATION DIA.
2~2.6mmφ

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位: 耗
mm



MATERIAL
材料
SEE TABLE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:
一般公差

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH
仕上
SEE TABLE

DWN M.SUGAWARA 12MAY06

CHK T.SHINOHARA 12MAY06

APVD K.BETSUI 12MAY06

PRODUCT SPEC

製品規格

SEE NOTE 1

APPLICATION SPEC

取付適用規格

SEE NOTE 3

WEIGHT —

CUSTOMER DRAWING

	部分金めっき SELECTIVE GOLD	黄銅 板厚0.3 BRASS ±0.3	1-173631-2
	SEE DRAWING 173631-8		173631-8
175027-7	部分金めっき SELECTIVE GOLD	リン青銅 板厚0.3 PHOS BRO. ±0.3	173631-7
175027-6	錫めっき済み PRE-TINNED	リン青銅 板厚0.3 PHOS BRO. ±0.3	173631-6
175027-2	部分金めっき SELECTIVE GOLD	黄銅 板厚0.3 BRASS ±0.3	173631-2
175027-1	錫めっき済み PRE-TINNED	黄銅 板厚0.3 BRASS ±0.3	173631-1
バラ端子型番 L/P NUMBER	仕上 FINISH	材料 MATERIAL	型番 PART NUMBER

STE

TE Connectivity

070 SERIES RECEPTACLE CONTACT

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A3	00779	C-173631	—

SCALE
尺度 5:1

SHEET
1 OF 1

REV
E6