


LOC	DIST	REVISIONS				
J	—	P	LTR	DESCRIPTION	DATE	DWN APVD
		A		RELEASED	23MAR2005	T.K D.M

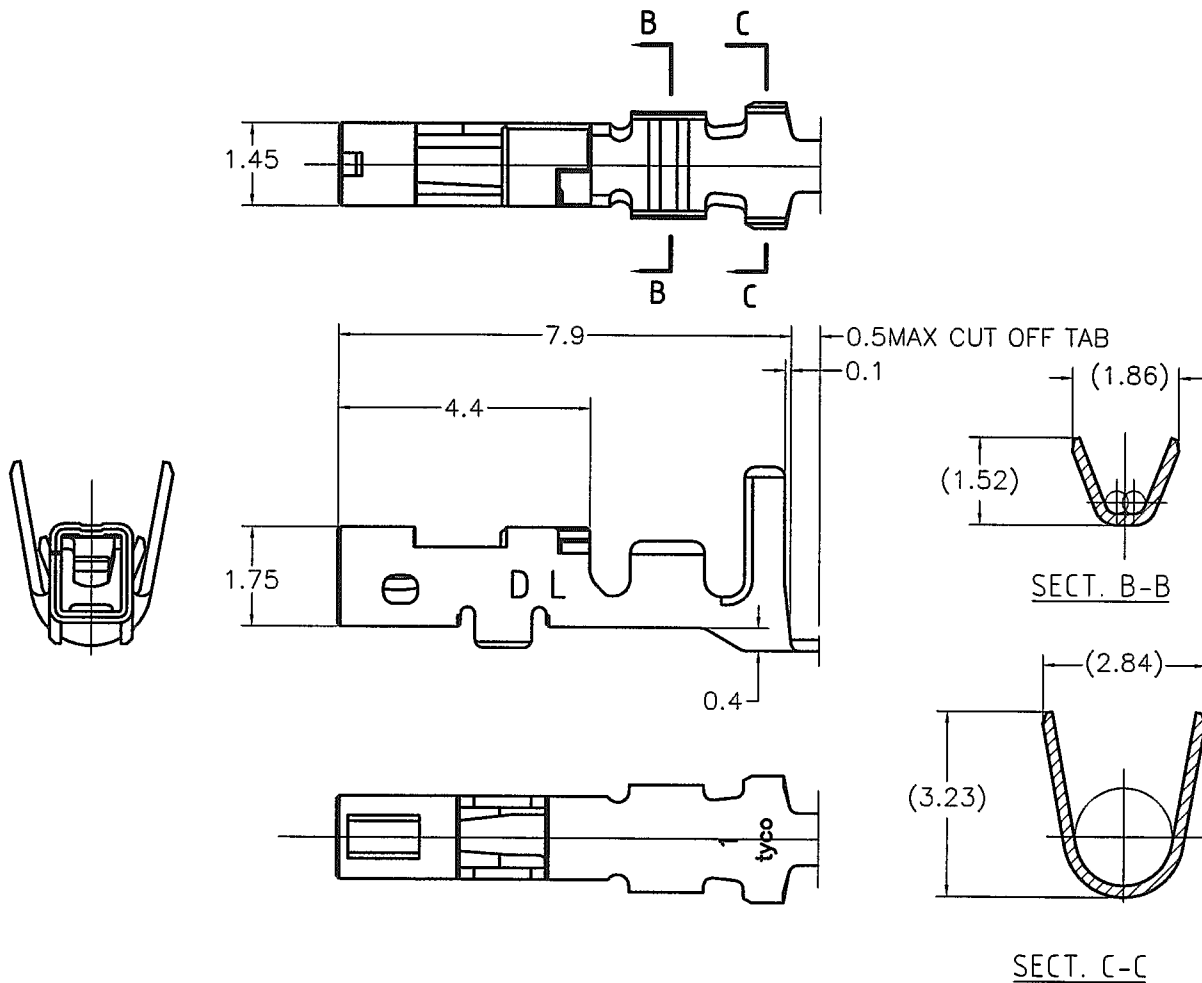

NOTE

1. GENERAL TOLERANCE : $\pm 0.3, \pm 3^\circ$
2. Application REC-HSG is applied to the product of 2.5mm PITCH or more of DYNAMIC D1000SERIES. 2.0mmPITCH cannot be used

THIS DRAWING IS UNPUBLISHED.

ALL RIGHTS RESERVED.

BY TYCO ELECTRONICS CORPORATION.

COPYRIGHT

DIMENSIONS: 単位: 特 mm		DWN T.KUDO	23MAR2005	MATERIAL 材料	COPPER ALLOY	FINISH OVER Ni PL : 1.27 μ m MIN 仕上 Au PL(CONTACT AREA):0.38 μ m MIN
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		CHK D.MITSUGI	23MAR2005	tyco Electronics Tyco Electronics AMP K.K. Kawasaki, Japan		
0 PLC $\pm -$ 1 PLC $\pm -$ 2 PLC $\pm -$ 3 PLC $\pm -$ 4 PLC $\pm -$ ANGLES $\pm -$		APVD D.MITSUGI	23MAR2005			
		PRODUCT SPEC 製品規格	108-78268	NAME 名称 DYNAMIC D1000 SERIES REC CONTACT (L TYPE)(L/P)		
		APPLICATION SPEC 取付適用規格	114-5377			
		WEIGHT	—	SIZE A4	CAGE CODE 00779	DRAWING NO 番号 C-1827588
		CUSTOMER DRAWING			SCALE 尺度	8:1
					SHEET	1 OF 1
					REV	A