

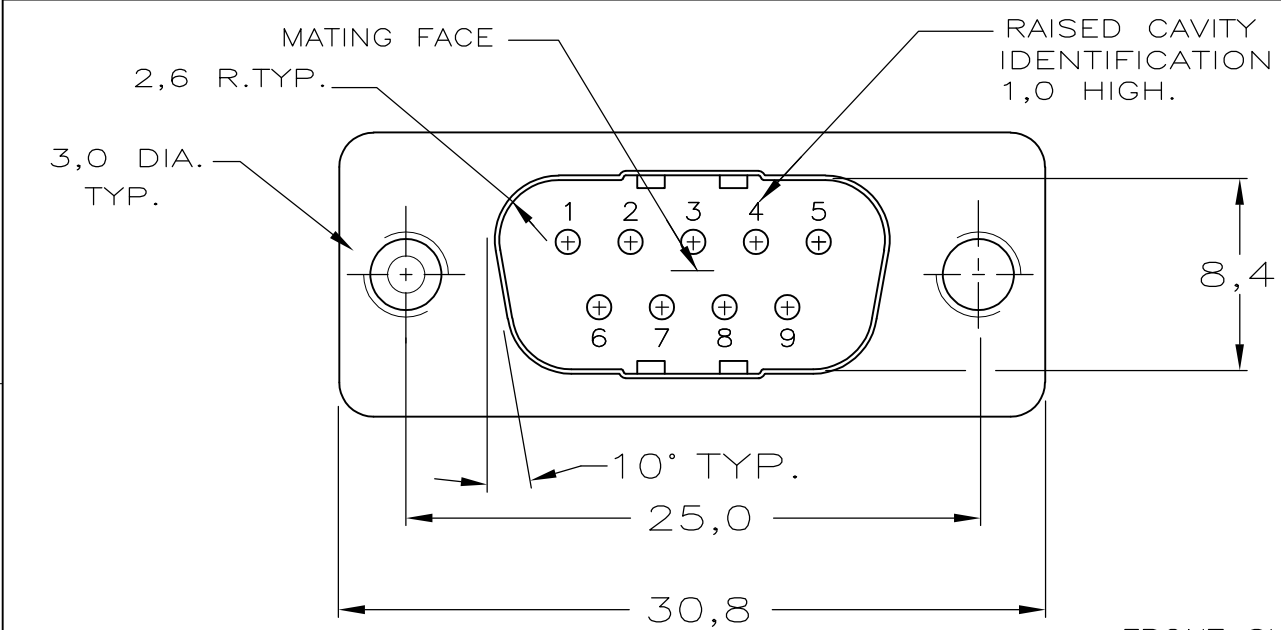
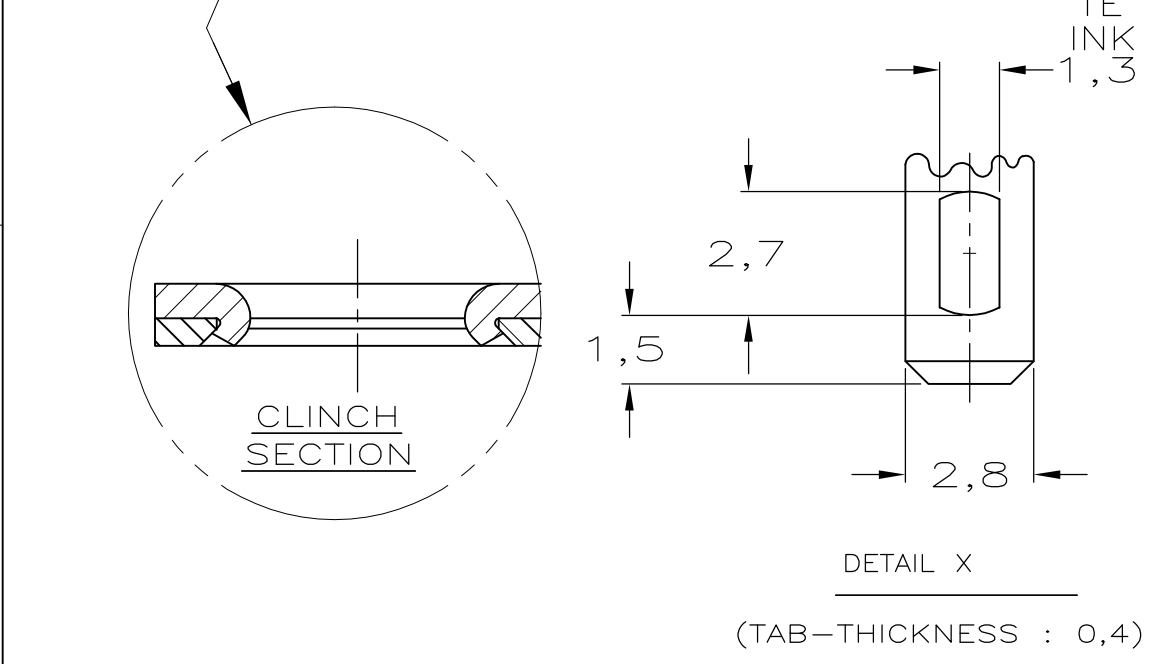


LOC		DIST		REVISIONS					
—		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
					B	EH01-1520-03	-	JvdH	PDJ
					B1	ECR-11-008744	09MAY11	GSK	KMA

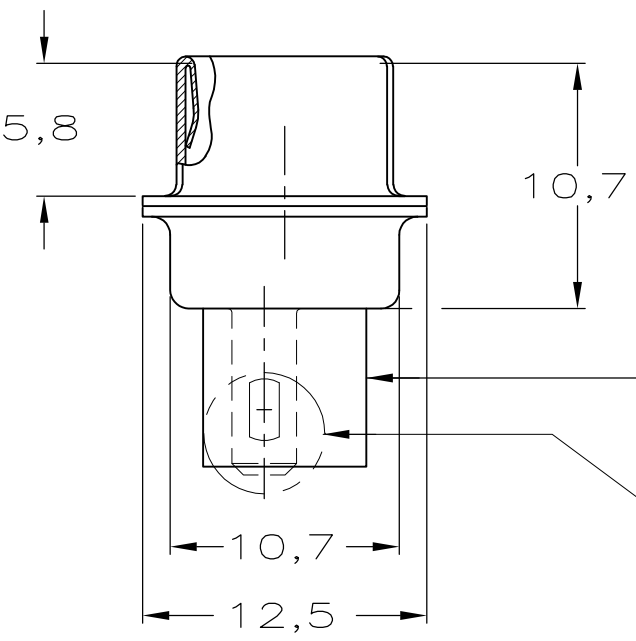

NOTES:

- 1 THIS PLUG ACCEPTS SIZE 20 PIN CONTACTS
- 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS 1,73 DIA. MAX..
- 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- 4 CONTACTS SHOWN FOR ILLUSTRATION ONLY,NO PART OF CONNECTOR PACKAGE,MUST BE ORDERED SEPARATELY.
- 5 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONT's 24-20AWG CONTACTS
91067-3 INSERTION/REMOVAL 91067-2 INSERTION/REMOVAL
726363-1 INSERTION ONLY 726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY

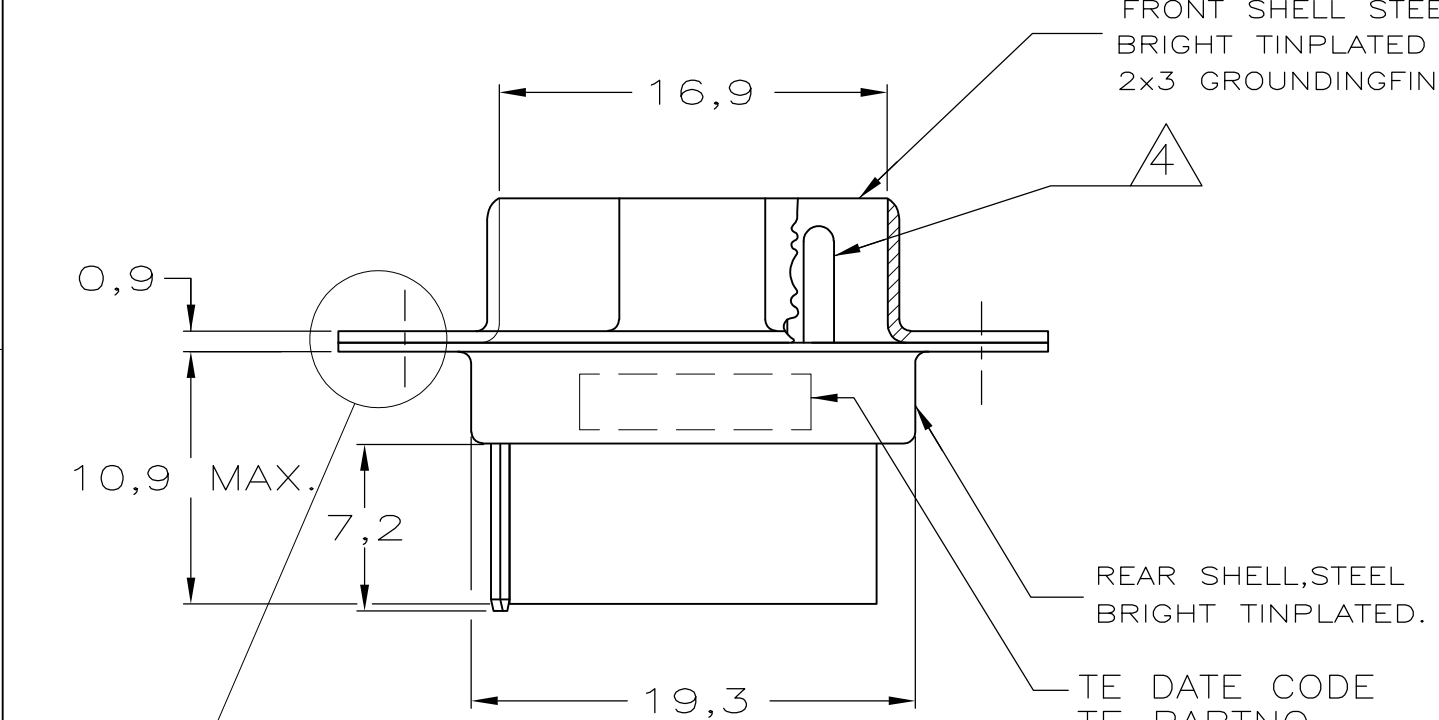

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	L.V.D.HEIJDEN.	30-06-87	SEE DRAWING				
		CHK	C.V.TILBURG.	07-07-87	FINISH				
		APVD	L.V.SOEST.	28-07-87	MATERIAL				
		PRODUCT SPEC			PARTNUMBER				
		APPLICATION SPEC			NAME				
		WEIGHT			HDP-20 PLUG CONNECTOR, SIZE 1, (9 POSITION) WITH SOLDER TAB.				
		CUSTOMER DRAWING			SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
					A3	00779	C-215711		
					SCALE	SHEET	1 OF 1	REV	
					-			B1	