


RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.


COPYRIGHT -

LOC	DIST	REVISIONS					
A1	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			M8	REVISED PER ECO-11-005150	31MAR2011	RK	HMR

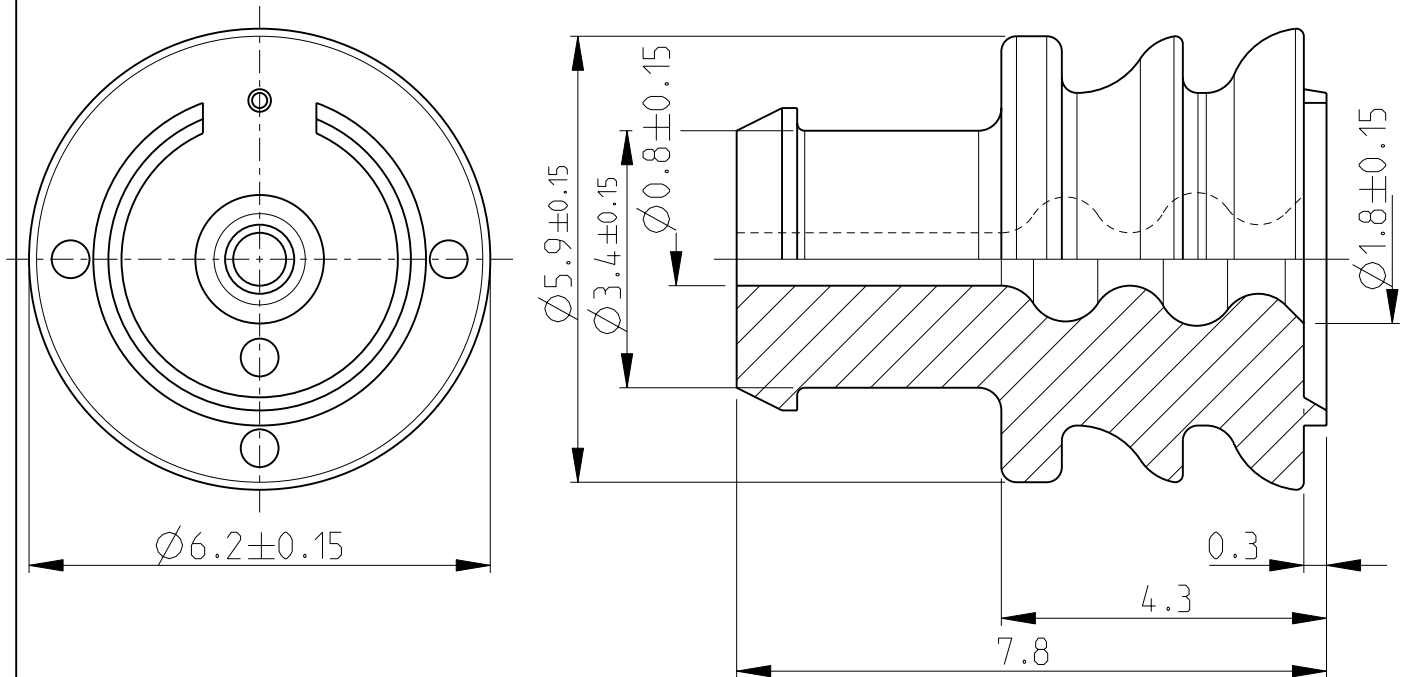


BEMERKUNGEN NOTES

- Einzelheiten der Ausfuehrung bleiben dem hersteller ueberlassen
DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
- Passend fuer Drahtgroessenbereich: 0.35-1mm²
SUITABLE FOR WIRE SIZE RANGE:
- Passend fuer Isolationsdurchmesser: 1.2-2mm
SUITABLE FOR INSULATION DIAMETER:
- Bestueckungshilfe fuer Einzelleiterabdichtung siehe: TE Connectivity: 965702
INSERTER FOR SINGLE WIRE SEAL SEE:
- Keine Luftloecher zulaessig
NO AIR BUBBLES PERMITTED



1:1

828920-2	M	DARK BLUE	VMQ-50, SILICON OIL FREE
828920-1	M	GREY	VMQ-50, 50% SELF-LUBRICATING
PART NO.	REV.	COLOUR	MATERIAL

DIMENSIONS:		DWN Gaupp,P.	17APR1997	MATERIAL		SEE TABLE		FINISH		-	
mm		CHK Kuempel,D.	21APR1997	TE Connectivity							
TOLERANCES UNLESS OTHERWISE SPECIFIED: DIN 16901-160		APVD	-								
0 PLC ±		PRODUCT SPEC		NAME RUBBER PLUG DIA. 2,5mm SYSTEM 0.35-1 SQUARE MILLIMETER FLK _r							
1 PLC ±		108-18263-1									
2 PLC ±		APPLICATION SPEC		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
3 PLC ±		114-18031		A 4		00779		C-828920		-	
4 PLC ±		WEIGHT		CUSTOMER DRAWING							
ANGLES ±°		-									
				SCALE		10:1		SHEET		1 OF 1	
										REV M8	