



NUMBER C-172773
METRIC
3rd ANGLE PROJECTION

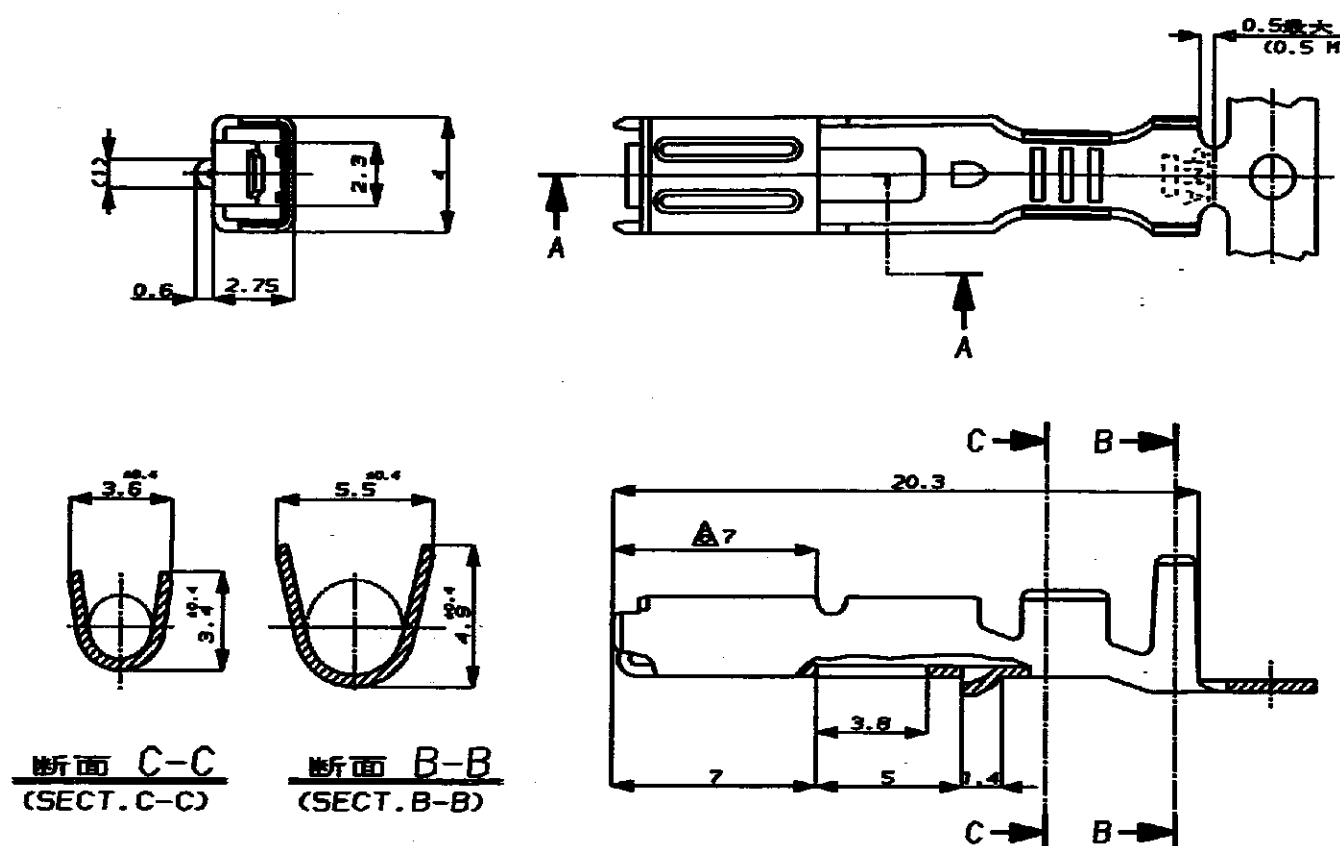

断面 C-C (SECT. C-C)
断面 B-B (SECT. B-B)

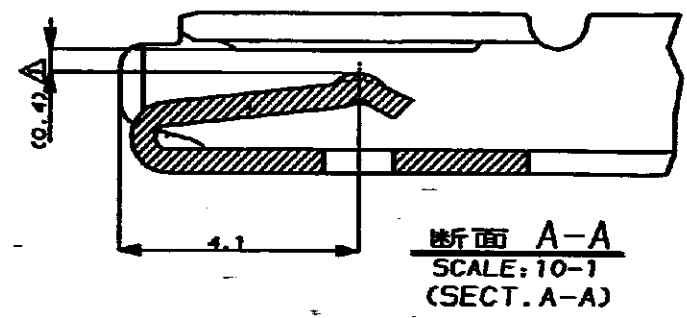

- 注:
- △ 0.65tタブと嵌合。
 - 2. 嵌合相手タブ型番 172777, 172778
 - 3. 製品規格 No.108-S165, 5166.
 - 4. 取付適用規格 No.114-5071.
 - 5. 相手ハウジング型番 172500 他。
 - △ 逆巻きリール。

- NOTES;
- △ MATE WITH 0.65t TAB.
 - 2. MATE TAB P/N 172777, 172778.
 - 3. PRODUCT SPEC. No. 108-5165, 5166.
 - 4. APPLICATION SPEC. No. 114-5071.
 - 5. PLUG HSG P/N 172500 ETC.
 - △ REVERSE REEL

172774-5	銅メッキ済 (PRE-TIN)	KLF-5	△ 1-172773-5	7
172774-1	銅メッキ済 (PRE-TIN)	黄銅 (BRASS)	△ 1-172773-1	6
172774-6	鍍金メッキ (SELECTIVE GOLD) △	黄銅 (PHOS BRO)	172773-6	5
172774-5	銅メッキ済 (PRE-TIN)	KLF-5	172773-5	4
172774-4	銅メッキ済 (PRE-TIN)	黄銅 (PHOS BRO)	172773-4	3
172774-2	鍍金メッキ (SELECTIVE GOLD) △	黄銅 (BRASS)	172773-2	2
172774-1	銅メッキ済 (PRE-TIN)	黄銅 (BRASS)	172773-1	1
プラグ端子型番 (P. NO.)	仕上 (FINISH)	材料 (MATERIAL)	型番 (P/N)	項番 (ID)

				Copyright ©1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.				Copyright ©1982 AMP (Japan), LTD. ALL RIGHTS RESERVED.				AMP		AMP (JAPAN), LTD. Tokyo, Japan					
				WIRE RANGE 0.5~2.27mm ² (AWG#20~#14)				INSULATION DIA 2.1~3.4 mm				NAME リセプタクル コンタクト マルチインテグレーションコネクタ (MIC) マークII RECEPTACLE MIC MK II							
				MATERIAL 表参照 SEE TABLE				FINISH 表参照 SEE TABLE				GENERAL TOLERANCE							
G L/P NO -S0804E J-1804				K J				S/TS OR. 9/8				B J				LOC NUMBER C-172773			
F REDRAWN W/CHANGE J-10628				K J				S/TS OR. 8/2				K J				SCALE REV. SHEET 5-1 G 1 OF 1			
LTR REVISION RECORD				OR				CHK DATE				OR				CHK DATE			

CUSTOMER DRAWING