
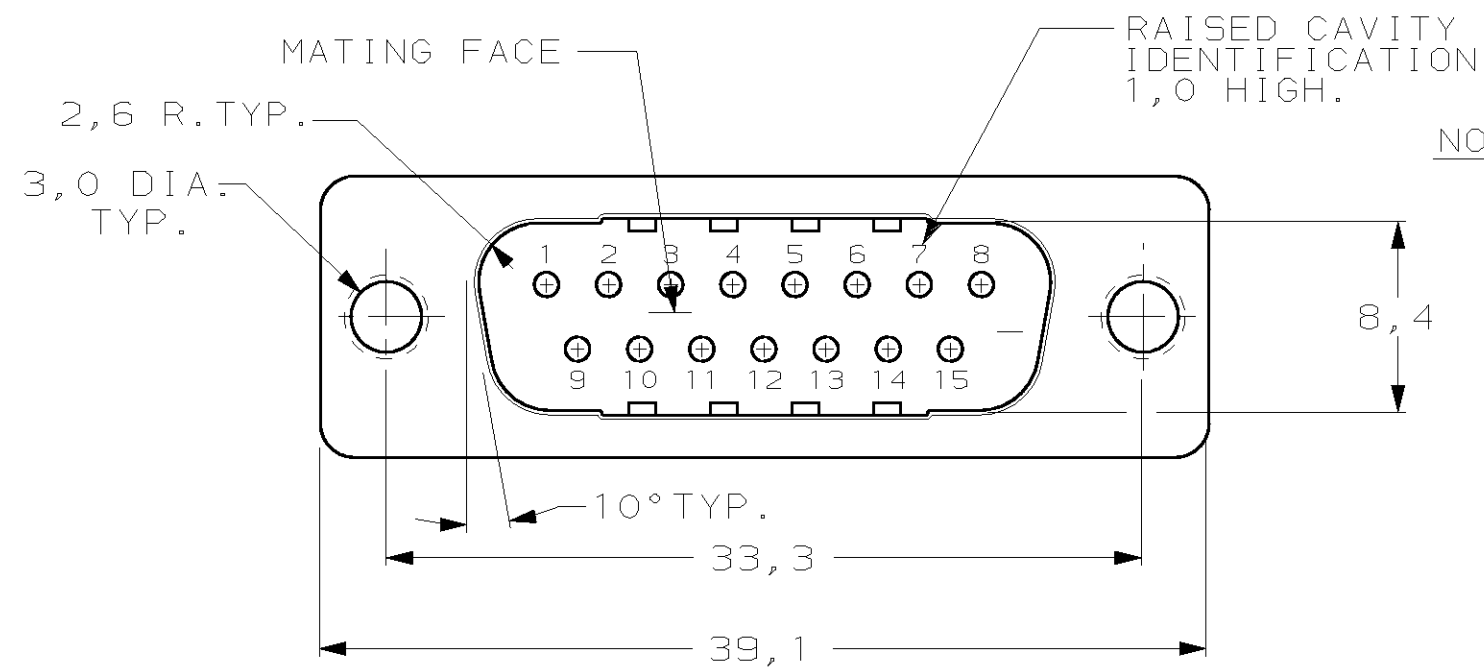


DO NOT SCALE


DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION





- NOTES:
- 1 THIS PLUG ACCEPTS SIZE 20 PIN CONTACTS
 - 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS PLUG IS 1,73 DIA. MAX..
 - 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
 - 4 CONTACTS SHOWN FOR ILLUSTRATION ONLY, NO PART OF CONNECTOR PACKAGE, MUST BE ORDERED SEPARATELY.
 - 5 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:
32-28AWG/28-24AWG CONT'S 24-20AWG CONTACTS
91067-3 INSERTION/REMOVAL 91067-2 INSERTION/REMOVAL
726363-1 INSERTION ONLY 726363-1 INSERTION ONLY
726364-1 REMOVAL ONLY

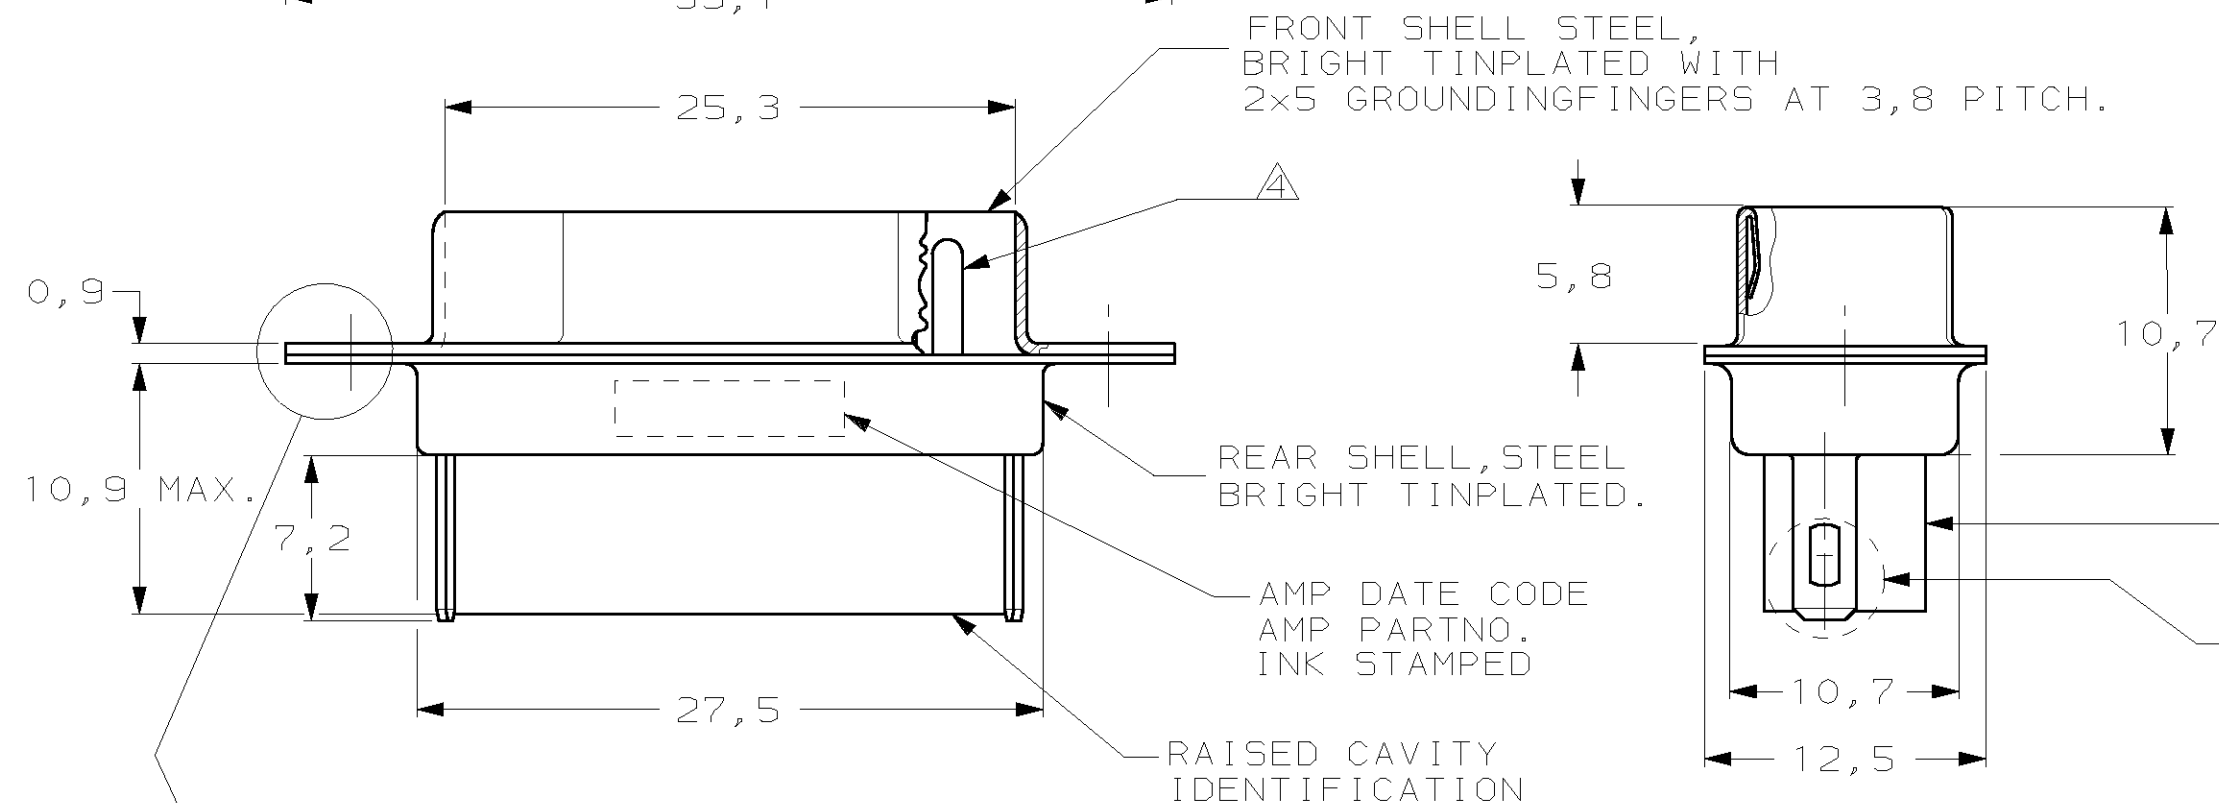

INSERTS: NYLON
GLASS-FILLED
SELF-EXTINGUISHING
COLOR: BLACK

SEE DETAIL X

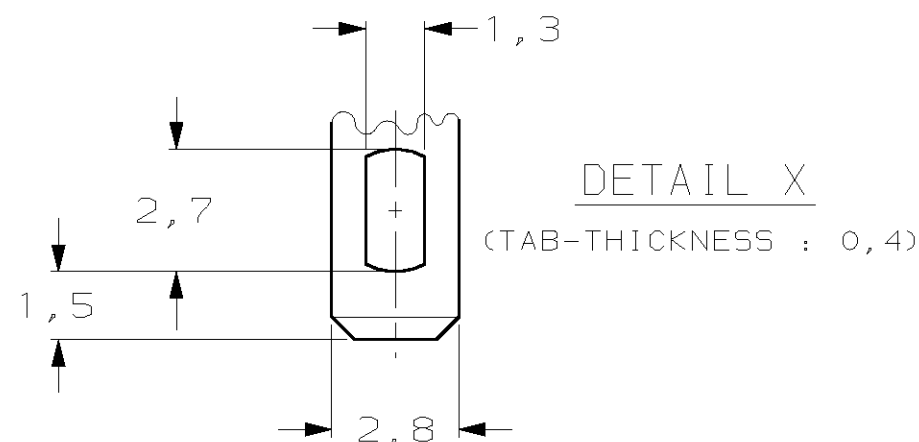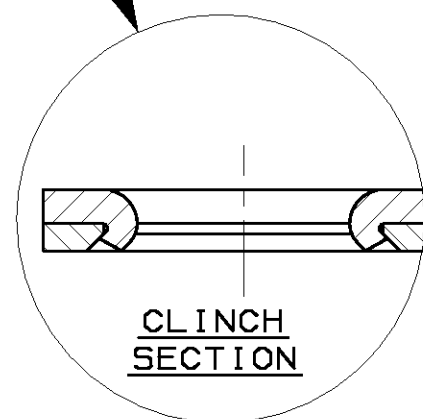

SEE DRAWING			SEE DRAWING			215712-1
FINISH			MATERIAL			PARTNUMBER
-	-	-	-	-	-	CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED © COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION , 19 tyco Electronics TYCO ELECTRONICS NEDERLAND B.V. 's-HERTOGEBOSCH, THE NETHERLANDS. NAME HDP-20 PLUG CONNECTOR, SIZE 2, (15 POSITION) WITH SOLDER TAB.
-	-	-	-	-	-	
-	-	-	-	-	-	
-	-	-	-	-	-	
-	-	-	-	-	-	
C	EH01-1520-03	JvdH	PDJ	22 DEC 03		
LTR.	REVISION RECORD		DR.	CHK.	DATE	
DR. : L.V.D.HEIJDEN.	CHK. : C.V.TILBURG.	APP. : L.V.SOEST.	DWG.No.		REV.LTR.	SHEET
DATE: 30-06-87	DATE: 07-07-87	DATE: 28-07-87	C-215712		C	1 OF 1