

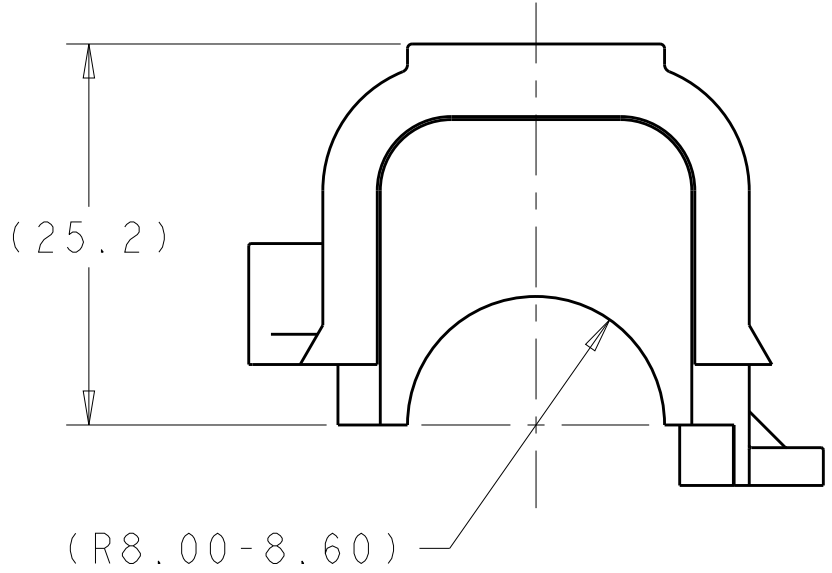


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REVISED PER ECO-13-009966	18JUN2013	DD	DS
	B3	REVISED PER ECO-15-007694	21MAY2015	DD	DS

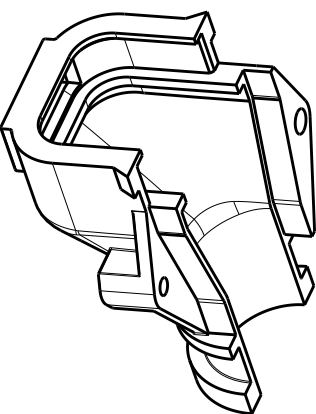

- 1 MATERIAL: PBT, 15% GLASS FILLED, COLOR: BLACK
2. ACCEPTS #4 SELF TAPPING SCREW (ELCO HI-LO THREAD CUTTING STYLE OR EQUIVALENT) TO BE DRIVEN AT 0.6 ± 0.2 N-M FOR INITIAL ASSEMBLY.
- 3 MATERIAL: PBT, 17% GLASS FILLED, UL RATED V-0/5VA, COLOR: GRAY

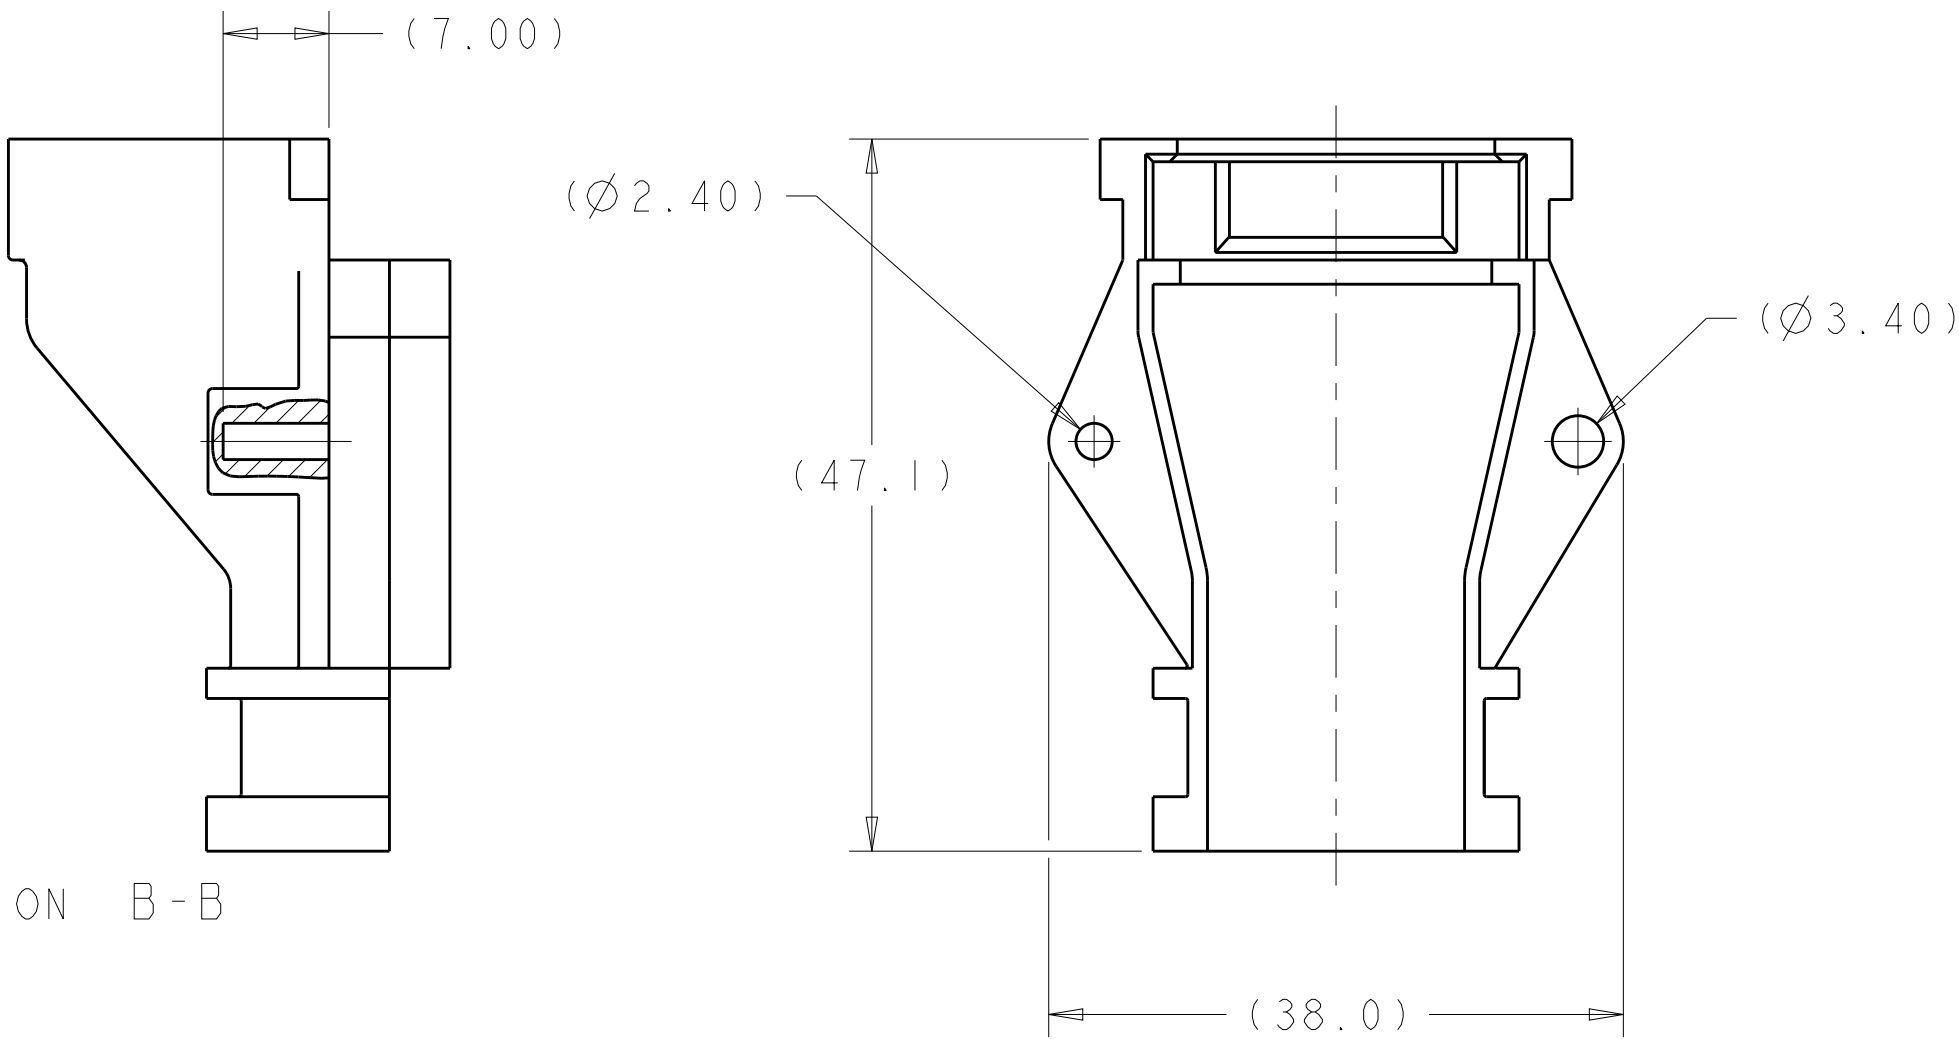

SCALE 1:1

3	776464-2
1	776464-1
MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. VESTAL 02APR2003	TE Connectivity			
DIMENSIONS:		CHK M. TRULL 02APR2003				
mm		APVD M. TRULL 02APR2003	NAME WIRE RELIEF, 23 POSITION			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC				
0 PLC ±-		APPLICATION SPEC	SIZE		CAGE CODE	DRAWING NO
1 PLC ±-		-	A200779		C-776464	RESTRICTED TO
2 PLC ±0.10		-	SCALE 2:1		SHEET 1	OF 1
3 PLC ±-		-	CUSTOMER DRAWING		REV B3	
4 PLC ±-		-				
ANGLES ±2°		WEIGHT				
FINISH		-				
MATERIAL		-				
SEE NOTES		-				
		-				