


| LOC | DIST | REVISIONS |     |                           |         |      |
|-----|------|-----------|-----|---------------------------|---------|------|
| CM  | 53   | P         | LTR | DESCRIPTION               | DATE    | OWN  |
|     |      |           |     |                           |         | APVD |
|     |      |           | C1  | REVISED PER ECO-11-004917 | 11MAR11 | RK   |
|     |      |           |     |                           |         | HMR  |

D


C

B



A

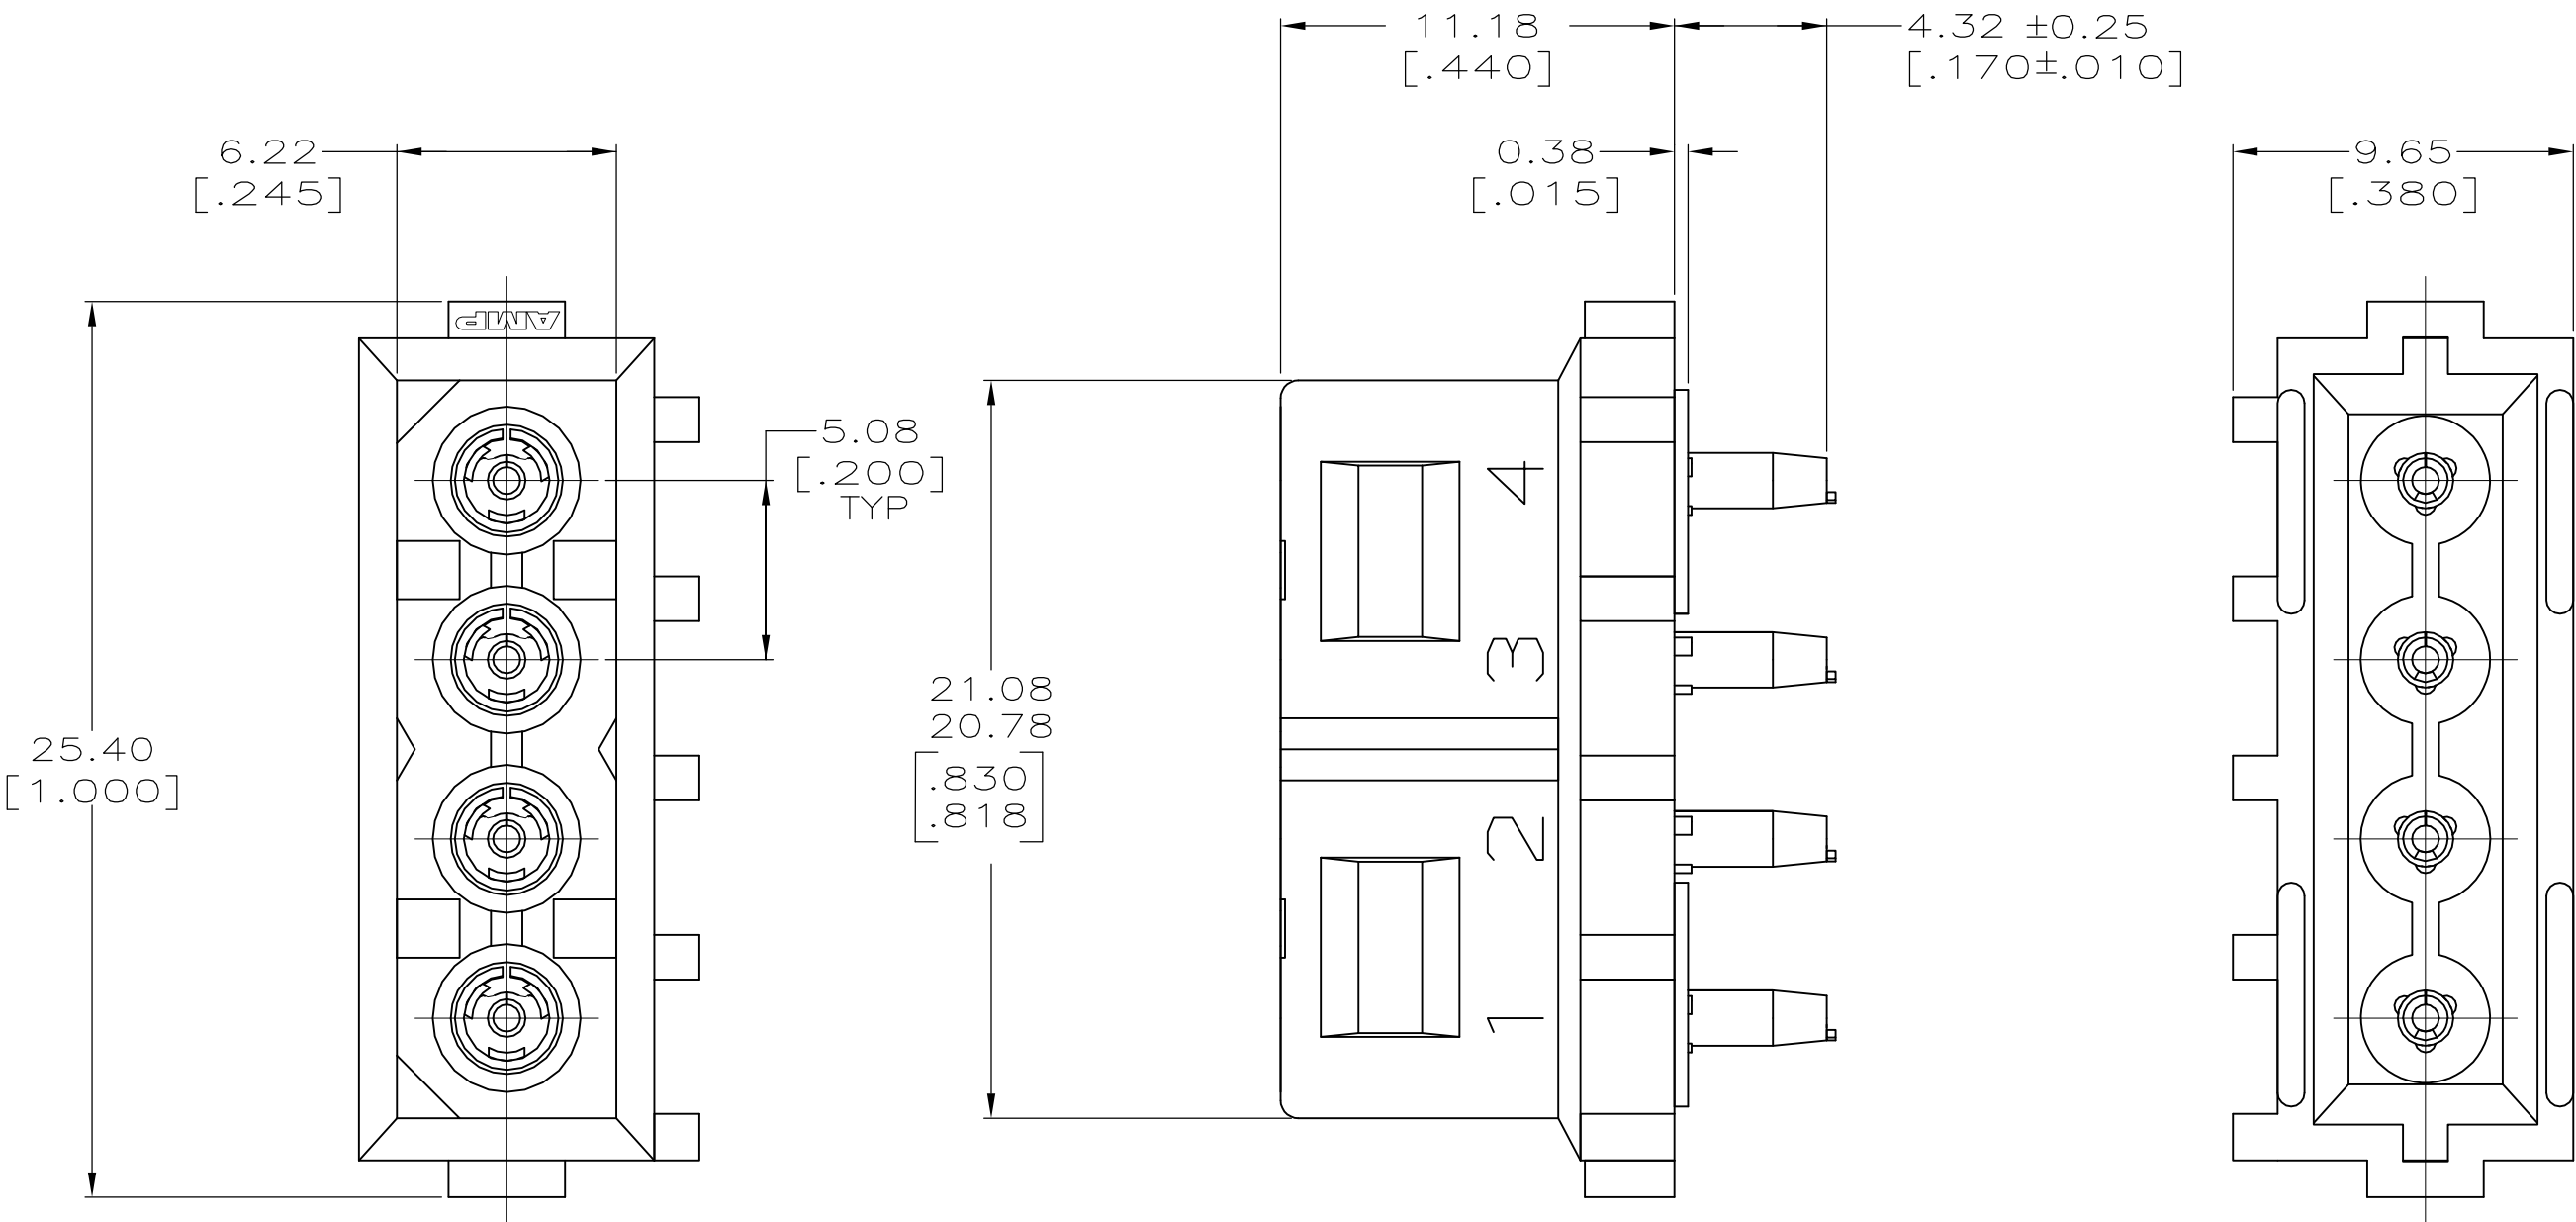

1. PARTS COMPLY WITH AMP  
SOLDERABILITY SPEC. 109-11-5.
2. DIMENSIONS IN BRACKETS ARE  
IN INCHES.

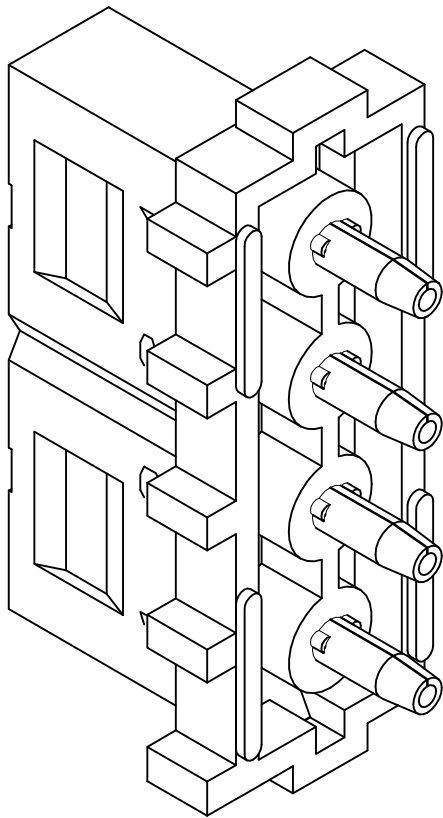


3-DIMENSIONAL MODEL  
NTS

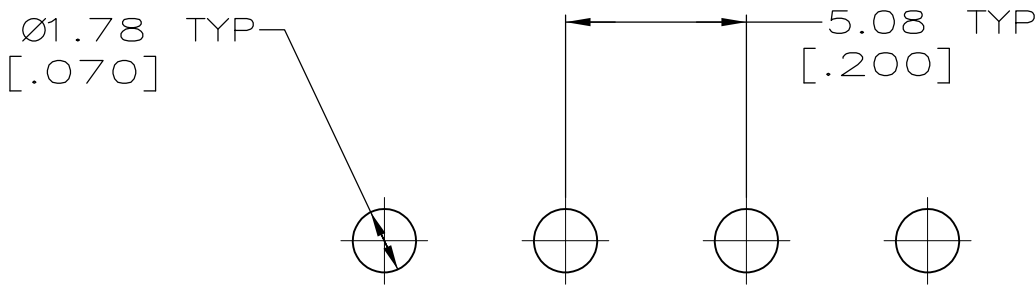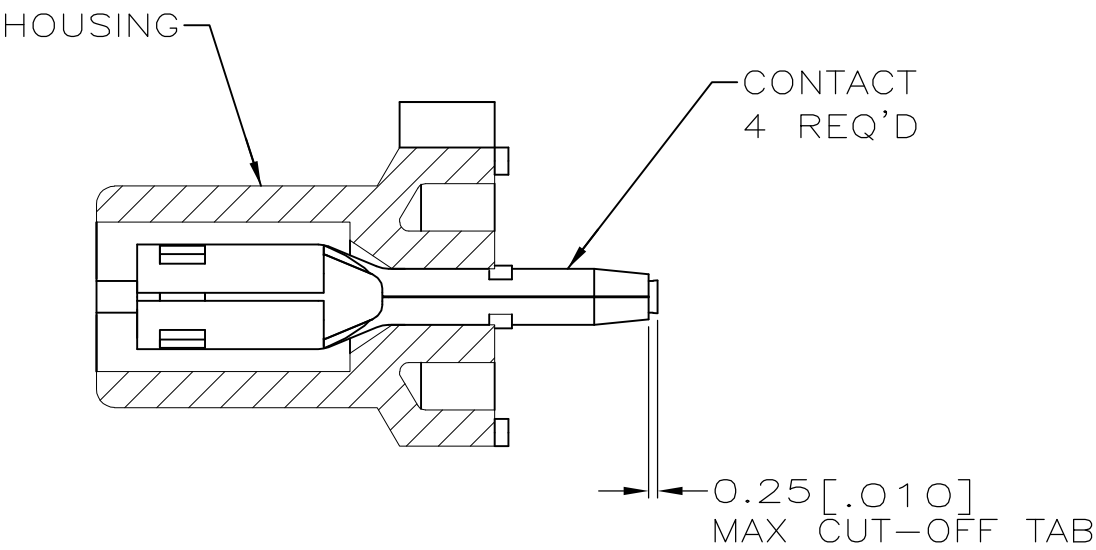

RECOMMENDED MOUNTING HOLE PATTERN  
FOR 1.57 [.062] THICK P.C. BOARD

|                                                               |                                                   |                     |
|---------------------------------------------------------------|---------------------------------------------------|---------------------|
| 0.251 [.0099] THK PH BRZ,PRE-TIN<br>CONTACT MATERIAL & FINISH | NYLON UL94V-2,NATURAL<br>HOUSING MATERIAL & COLOR | 770997-1<br>PART NO |
|---------------------------------------------------------------|---------------------------------------------------|---------------------|



THIS DRAWING IS A CONTROLLED DOCUMENT FOR  
AMP INCORPORATED. IT IS SUBJECT TO CHANGE  
AND THE CONTROLLING ENGINEERING ORGANIZATION  
SHOULD BE CONTACTED FOR THE LATEST REVISION.

|                                                                               |  |                               |                                                                        |              |                 |           |
|-------------------------------------------------------------------------------|--|-------------------------------|------------------------------------------------------------------------|--------------|-----------------|-----------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                        |  | DWN<br>K. WHITAKER<br>8-25-92 | TE Connectivity                                                        |              |                 |           |
| DIMENSIONS:<br>MM[INCHES]                                                     |  | CHK<br>R. SWING<br>8-25-92    |                                                                        |              |                 |           |
|                                                                               |  | APVD<br>G. BROWN<br>8-26-92   | NAME<br>SOCKET HEADER ASSEMBLY,<br>4 CIRCUIT,<br>COMMERCIAL MATE-N-LOK |              |                 |           |
|                                                                               |  | PRODUCT SPEC                  |                                                                        |              |                 |           |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:                                     |  | APPLICATION SPEC              | SIZE<br>A2                                                             |              |                 |           |
| 0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± 0.13 [.005]<br>4 PLC ± ± 0°30' |  | WEIGHT -                      | CAGE CODE<br>00779                                                     |              |                 |           |
| MATERIAL<br>SEE TABLE                                                         |  | FINISH<br>SEE TABLE           | DRAWING NO<br>G-770997                                                 |              |                 |           |
|                                                                               |  | CUSTOMER DRAWING              |                                                                        | SCALE<br>5:1 | SHEET<br>1 of 1 | REV<br>C1 |