
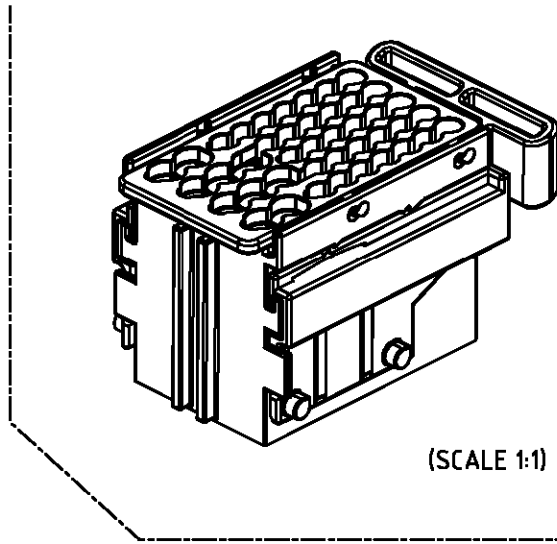
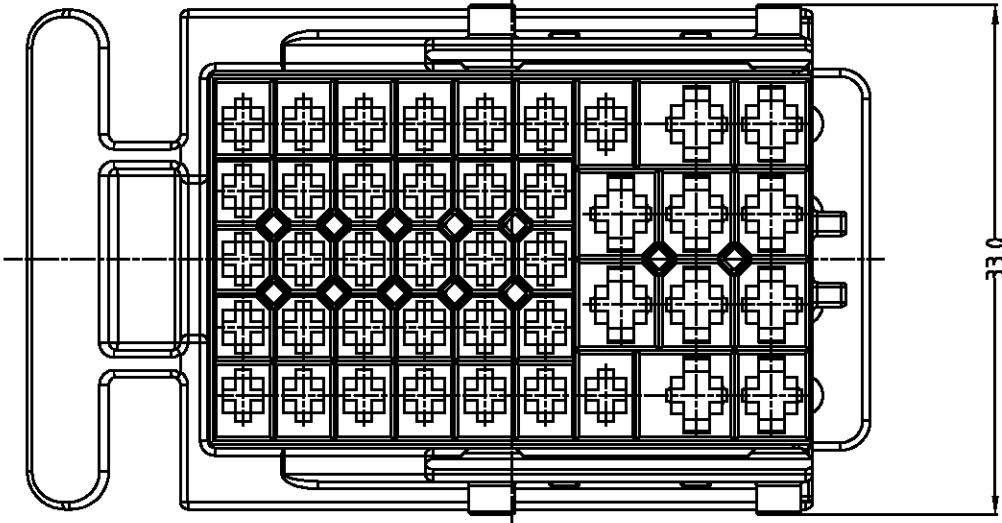
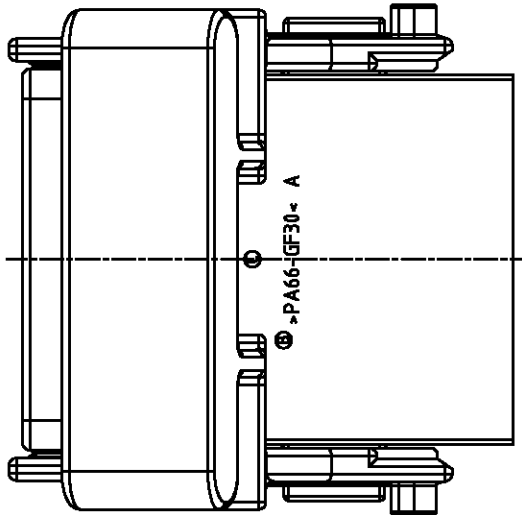


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DS			0	RELEASED(FC00-0113-03)	22/AUG/03	MS	CS
			A	REVISED(FC00-0027-04)	13/FEB/04	MS	CS
			B	REVISED(FC00-0189-04)	10/AUG/04	YD.	CS
			C	REVISED(FC00-0044-05)	14/FEB/05	SB	CS

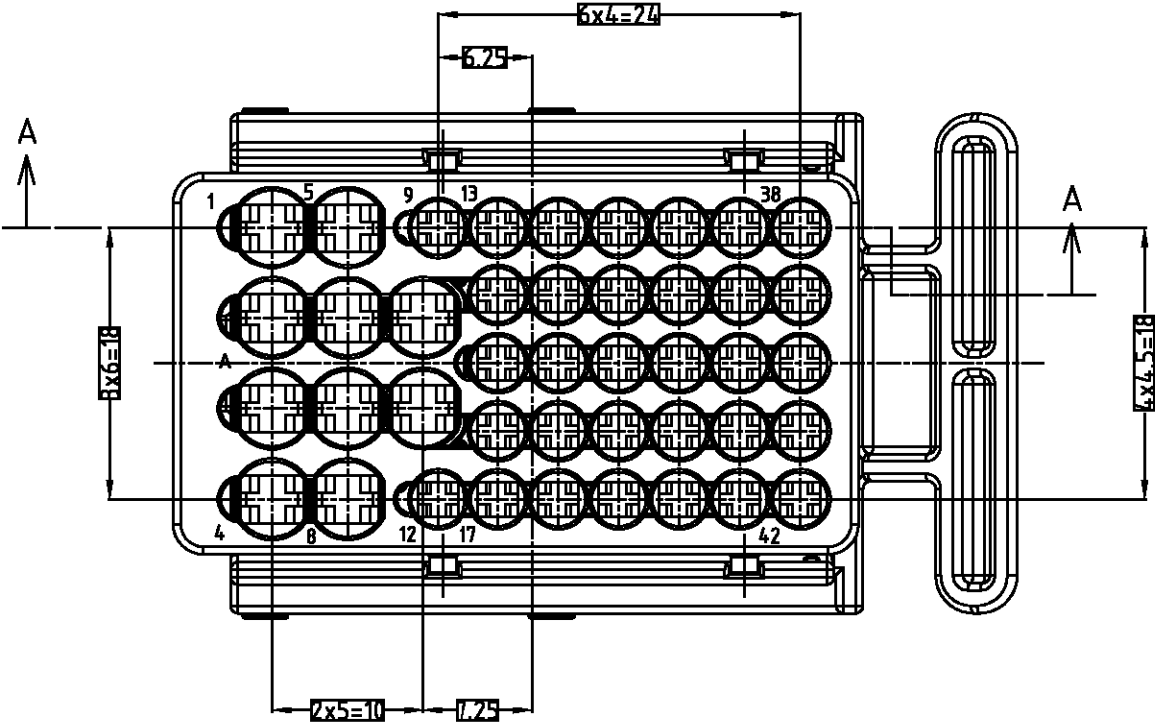

- NOTES;
1. GENERAL TOLERANCE IS ± 0.3
 2. CONDITION OF DELIVERY :
DBL IN 1ST. LOCKING POSITION
SLIDE LEVER IN 2ND. LOCKING POSITION
 3. APPLIED CAP ASS'Y P/N: 0-936429-2,-4, 1-936429-2, 2-936429-3
APPLIED INNER SEAL P/N: 0-936863-1
APPLIED WIRE COVER P/N: 0-936615-2
 4. APPLIED RECEPTACLE CONTACT P/N : TABLE 1

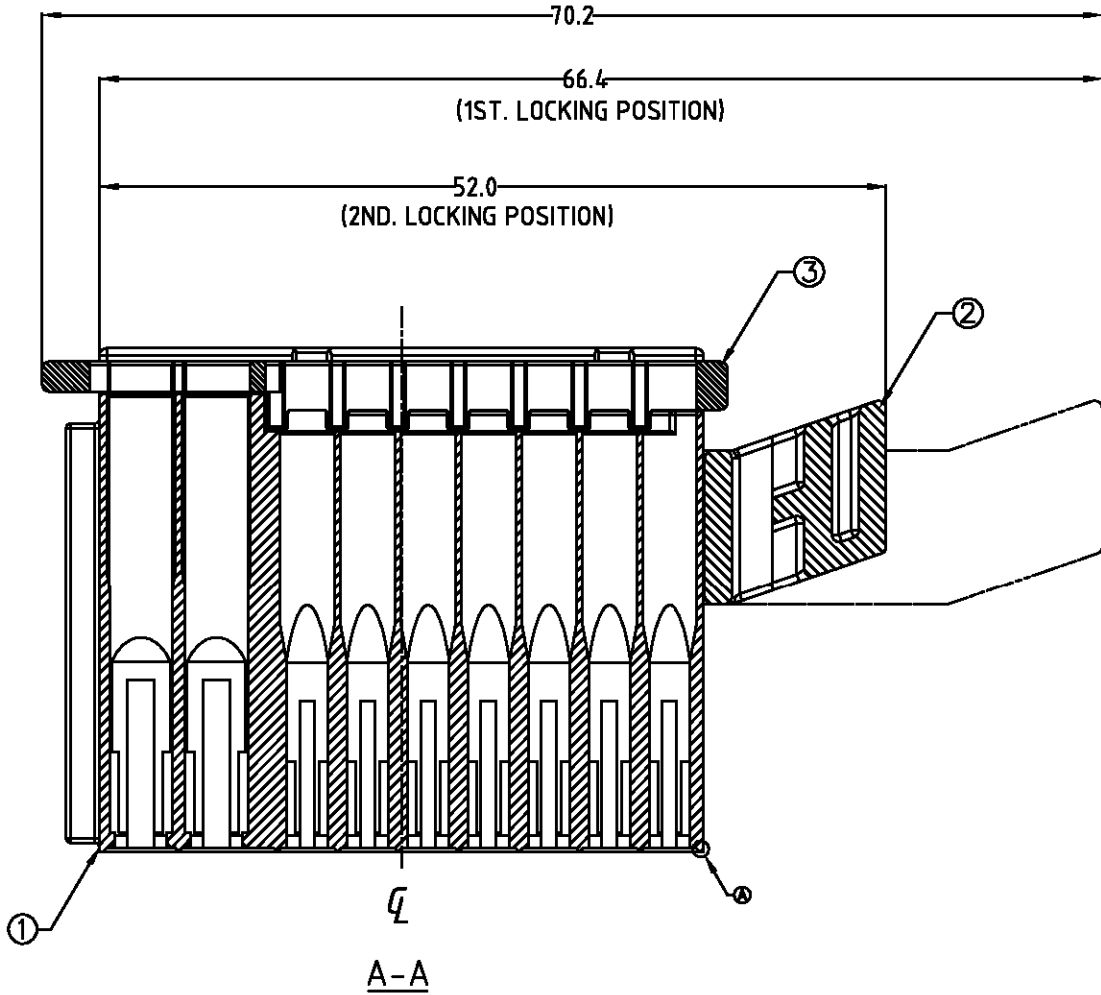
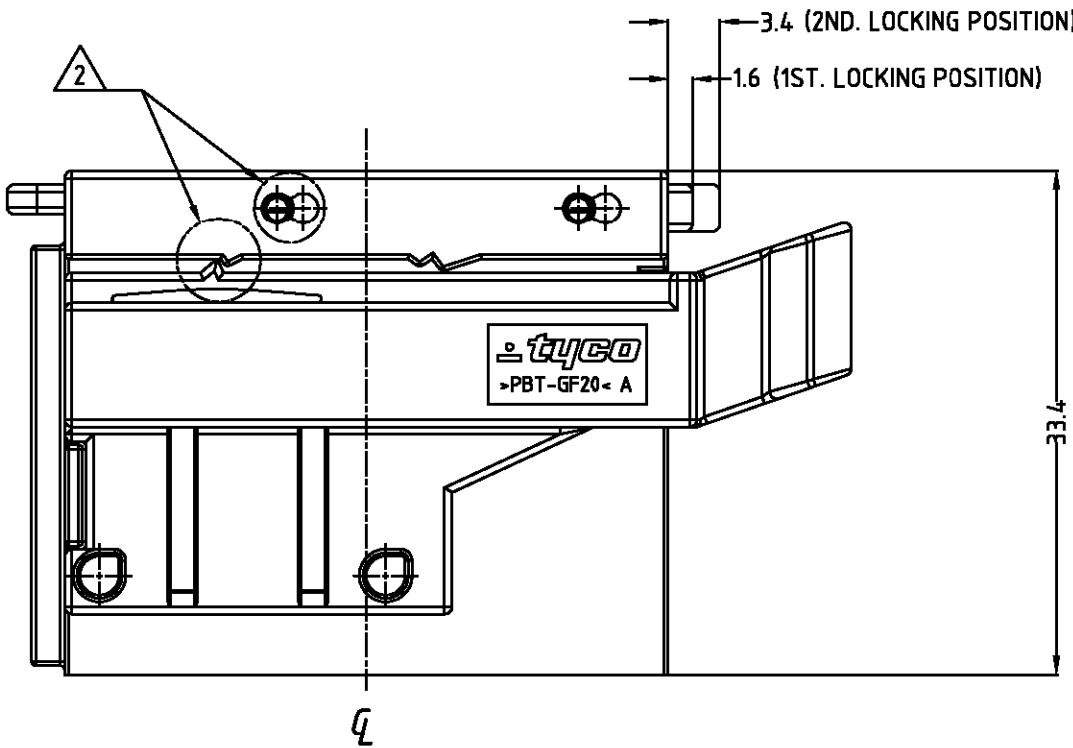


TABLE 1-			
TYPE	Part NO.	WIRE SIZE(mm ²)	FINISH
MT II	0-962875-1	0.25-0.5	CuSn4
	0-962875-3		CuSn4(GOLD)
	0-962876-1	0.5-1.0	CuSn4
	0-962876-3		CuSn4(GOLD)
JPT	0-927770-3	0.5-0.85	CuSn4
	2-927770-1		CuSn4(GOLD)
	0-927766-3	1.25-2.0	CuSn4
	2-927766-1		CuSn4(GOLD)

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DIMENSIONS:
mm

3rd ANGLE PROJECTION

MATERIAL
SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0-XX-10 ± 0.2
10-XX-30 ± 0.25
30-XX ± 0.3
ANGLES ± 3°

FINISH

DWN : SB LEE
CHK : BN JANG
APVD : CS LEE

PRODUCT SPEC
APPLICATION SPEC
WEIGHT

AMP KOREA.
kyungsan, korea

NAME
PLUG ASSEMBLY FOR MTII/JPT HYBRID
SEALED 42P CONN'R

SIZE
A2

CAGE CODE
00779

DRAWING NO
936421

RESTRICTED TO

SCALE 2/1

SHEET 1 OF 1

REV C

AMP 1471-9 REV 31MAR2000