

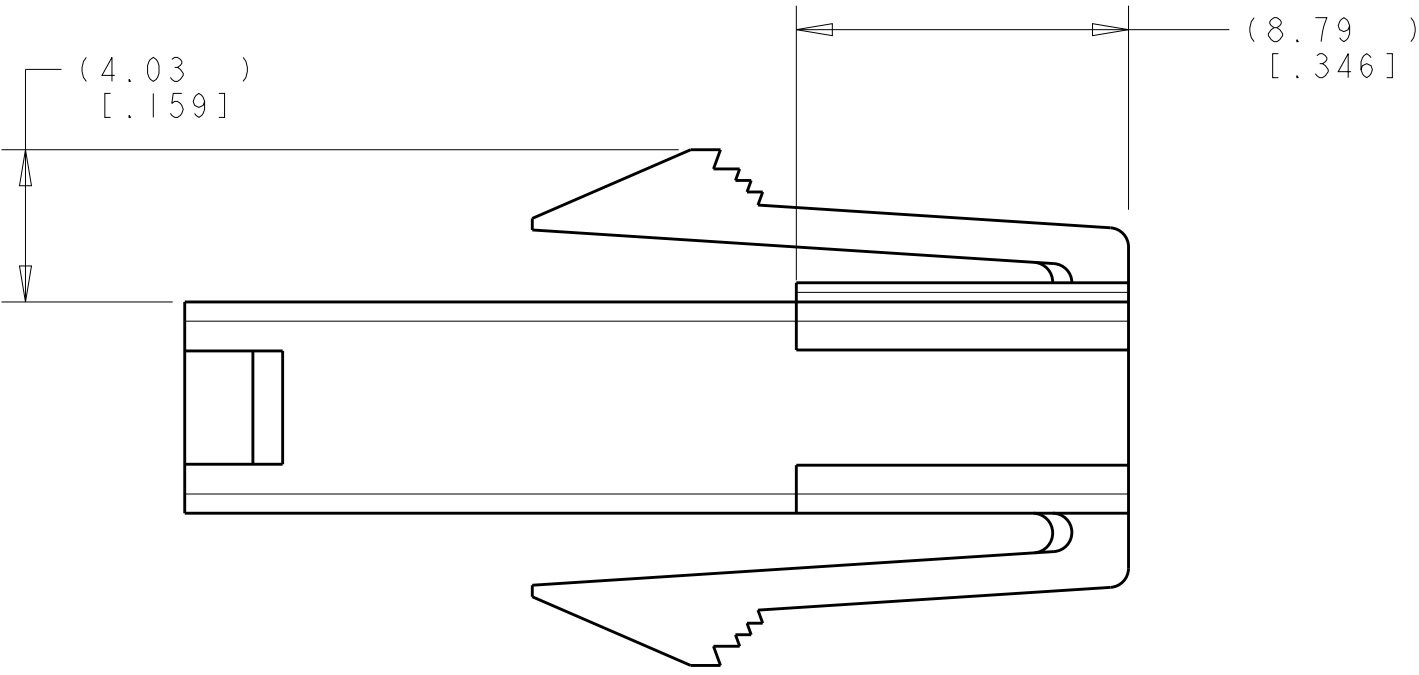
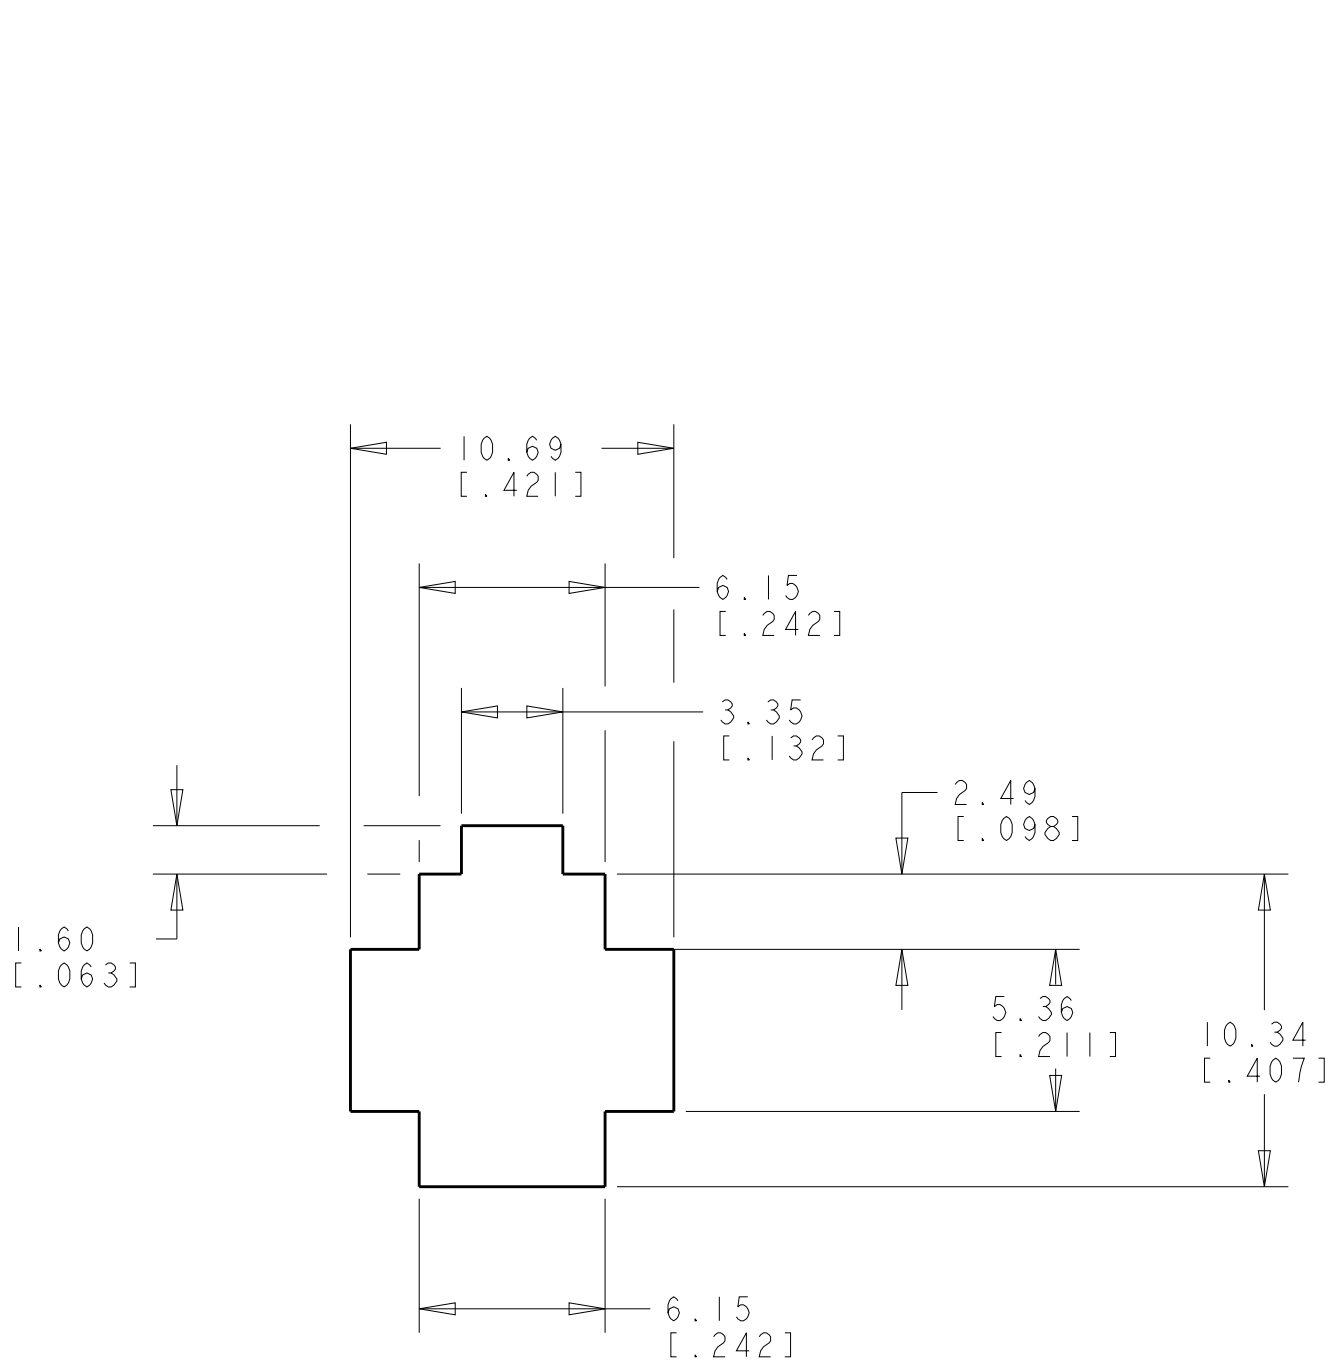
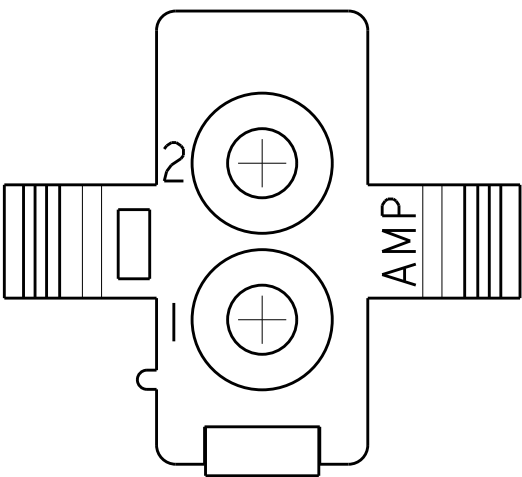
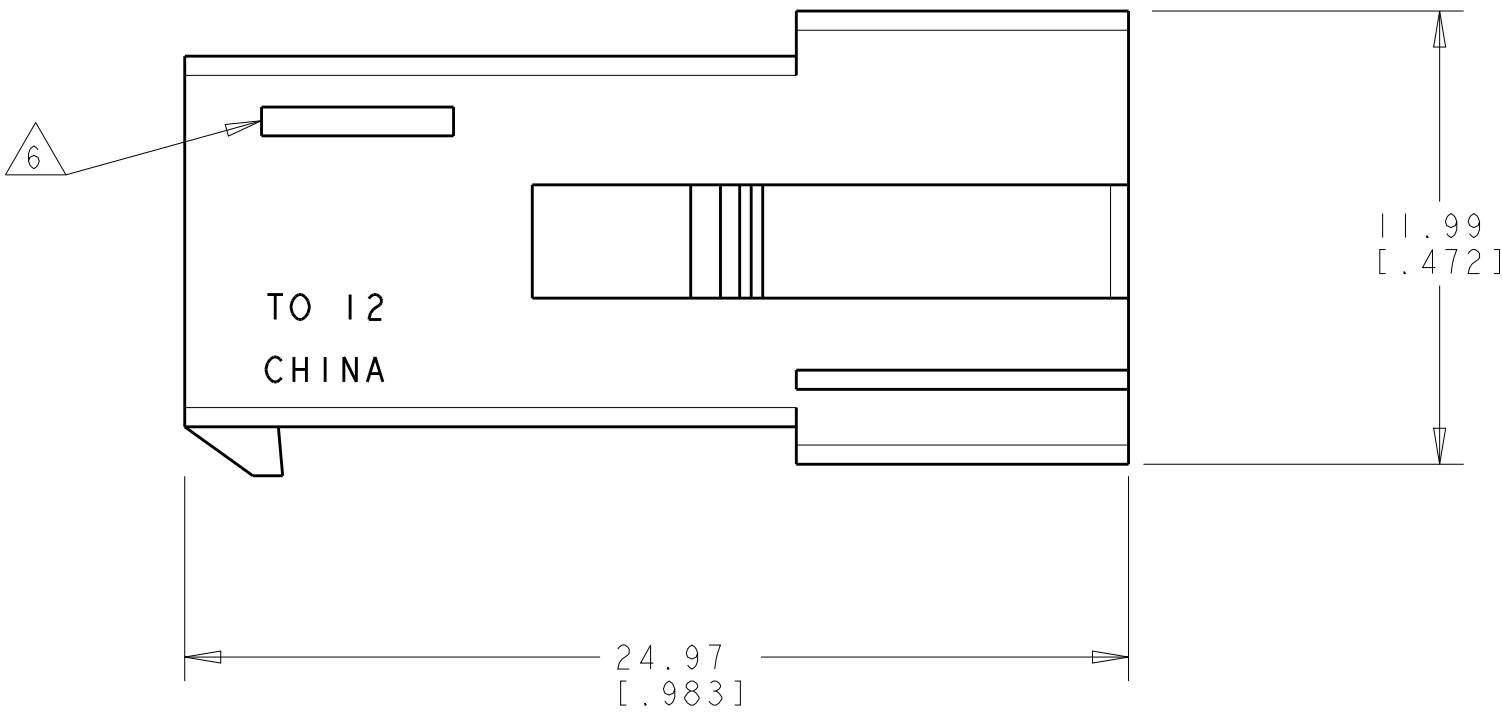


LOC		DIST		REVISIONS					
CM		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A3	ECR-15-006129	30APR2015	SC	DZ

1. APPLICABLE CONTACT P/N: 170539, 170360, 170361, 170362.
2. MATING HOUSING P/N: 794894.
- RECOMMENDED PANEL THICKNESS TO BE 0.8-2.0 [.031-.079].
- HOUSING INSERTION INTO THE PANEL CUT OUT MUST BE IN THE SAME DIRECTION AS THE PUNCH.)
- GWT 750° (WITH OUT FLAME) ACC. IEC 60335-1
- MATERIAL DESIGNATION.

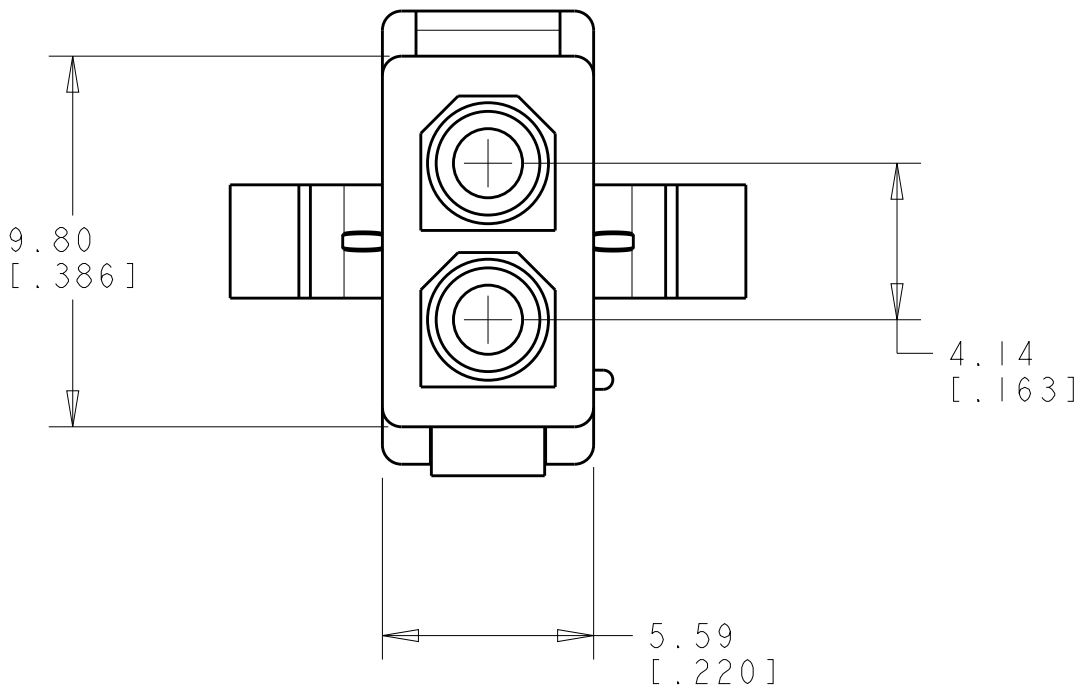

RECOMMENDED PANEL CUT OUT
SCALE 4:1

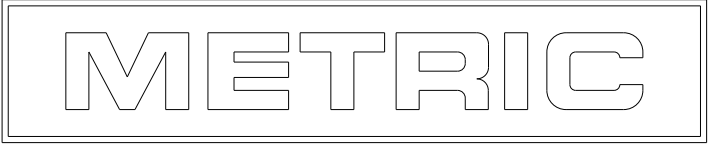

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. WHITAKER	29JAN2001	TE Connectivity			
DIMENSIONS: mm[INCHES]		CHK C. JONES	29JAN2001				
		APVD C. JONES	29JAN2001	NAME CAP, 2 CIRCUIT, SEALED APPLICATION, MINI UNIVERSAL MATE-N-LOK™			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
		0 PLC ±°		APPLICATION SPEC			
		1 PLC ±°		WEIGHT			
MATERIAL		FINISH		SIZE A 1		CAGE CODE 794896	
				CUSTOMER DRAWING		SCALE 5:1	
						SHEET 1 OF 1	
						REV A3	