used for: DIN EN 60603

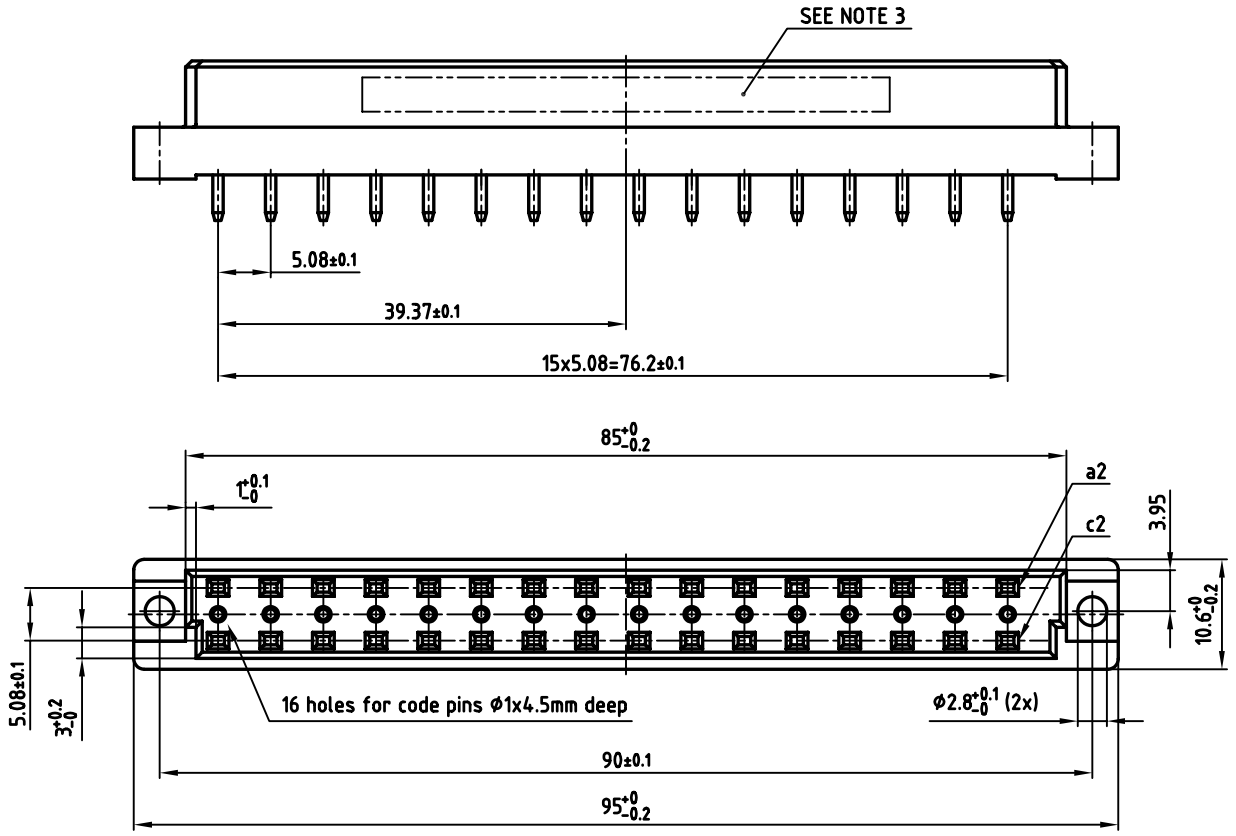

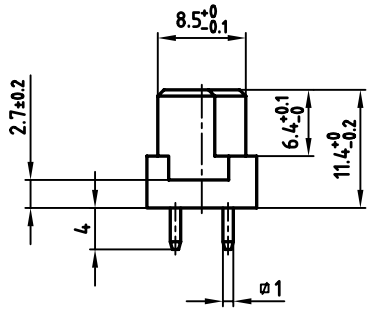

Directive 2002/95/EC „RoHS" Compliant

NOTES:

1. INSULATORS: PBTP UL 94 V-0, GREY
2. CONTACTS: COPPER ALLOY
   PLATING: GOLD OVER NICKEL
   50 MATING CYCLES
3. CONNECTOR IS PART MARKED: 122A10949X CONEC ABC

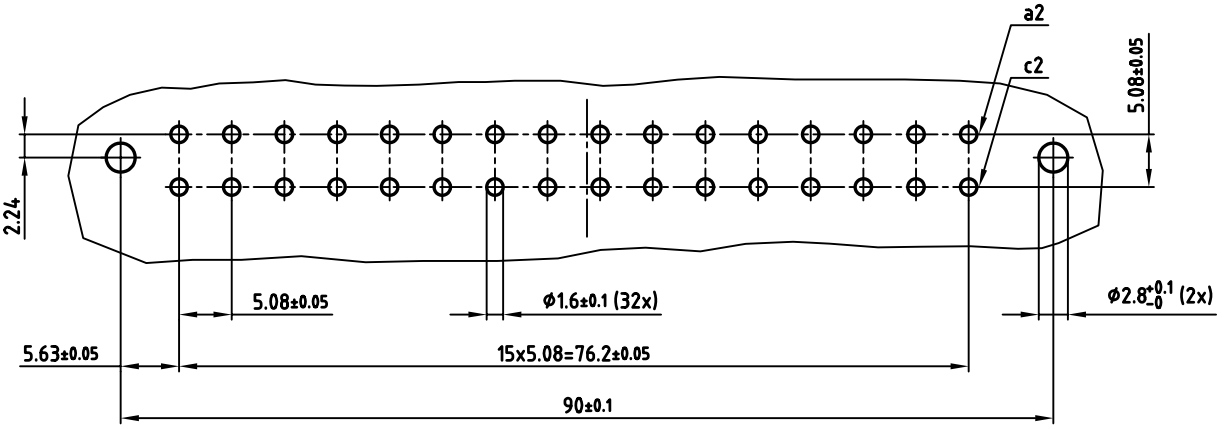

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance

dim. in mm

	date	name
2004		
drawn	16.09.	Lehmenkühler
appd.	16.09.	Kühle
norm	DIN EN 60603	
d-old		

CONEC®

scale: 2:1

material: SEE NOTES

title:

FEMALE CONNECTOR TYPE "D"

32pos. SOLDER PIN 4mm

⌀1mm

dwg no: 12K1A319

AutoCAD 2004 | DIN-A 3 | sh: 1/1

part no: 122A10949X