





10 9 8 7 6 5 4 3 2 1

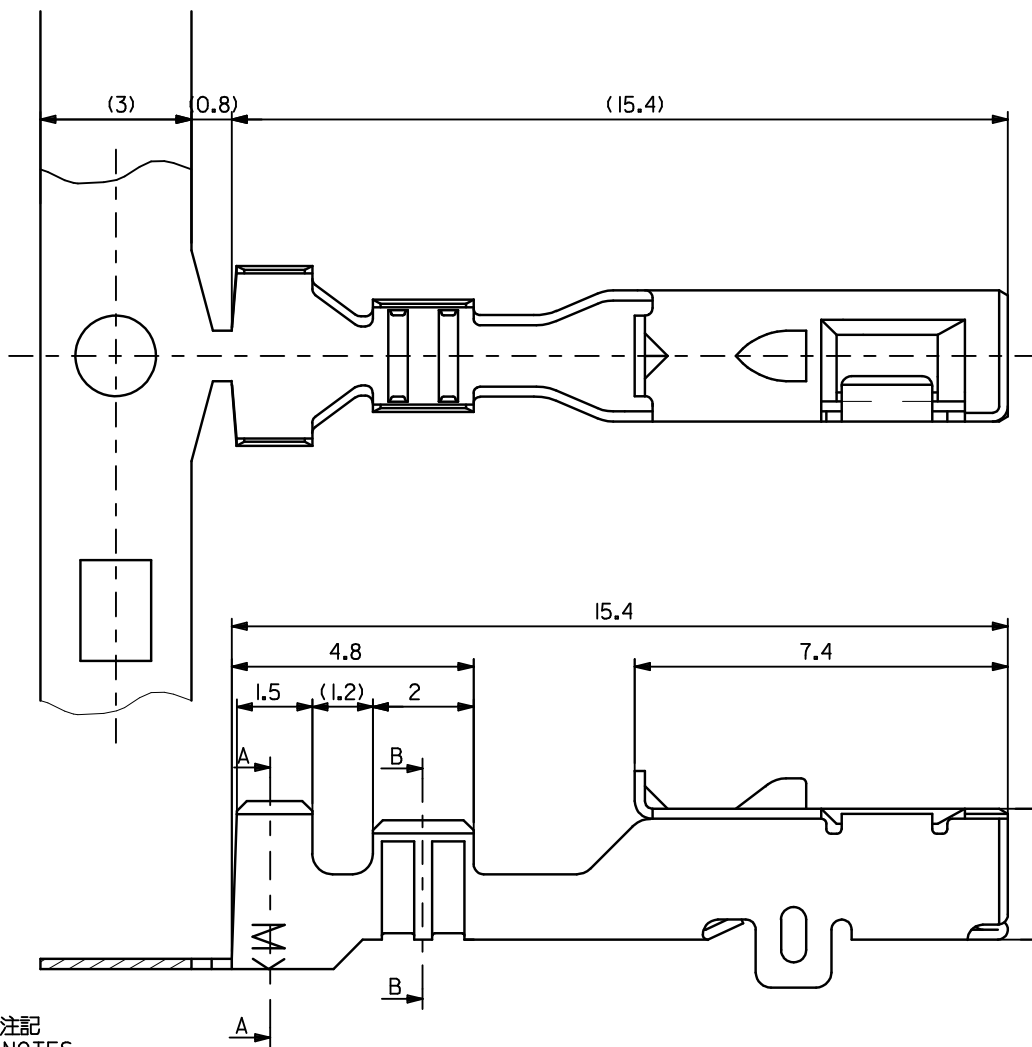

SECT. B-B



SECT. A-A



注記
NOTES

- 適合ハウジング: 51115-1601, 51116-1601
APPLICABLE HOUSING: 51115-1601, 51116-1601
- 材料: リン青銅, 錫メッキ材 (t=0.2)
MATERIAL: PRE-TINNED PHOSPHOR BRONZE (t=0.2)
- 適用電線: APPLICABLE WIRE RANGE
AVS-0.3, AVS-0.3f, AVS-0.5, AVS-0.5f, AVSS-0.5
AVSS-0.5f, CAVS-0.5, AVS-0.75f, AVSS-0.75f
AVS-0.85, AVSS-0.85, CAVS-0.85
- 被覆外径: INS. RANGE $\phi 1.6 \sim 2.3$

REVISED EC NO: JTR2017-0015 DRWN:YFUSHIMI 2016/10/24 CHKD:TAITO 2016/10/25 APPR: MAYAMOTO 2016/10/25 REV B	DESCRIPTION	QUALITY SYMBOLS F _A =0 F _G =0 F _P =0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION					
			10 UNDER	± 0.2	DRAWN BY K.FURUYAMA	DATE 1994/03/03	TITLE 4.0 W/W CRIMP REC (SAE J1962 DIAGNOSTIC CONNECTOR)							
			10 OVER 30 UNDER	± 0.25	CHECKED BY M.SANO	DATE 1994/06/30								
			30 OVER	± 0.3	APPROVED BY M.ENOMOTO	DATE 1994/06/30	molex							
			ANGULAR ±3 °	MATERIAL NO.		DOCUMENT NO.						SHEET NO.		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART							SD-50420-8*00		1 OF 1
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

9 8 7 6 5 4 3 2 1