







FCIconnect.com


Copyright FCI



form: A3

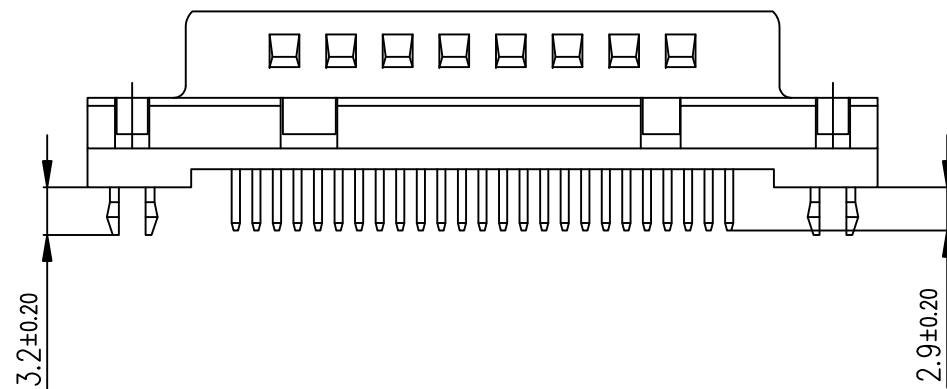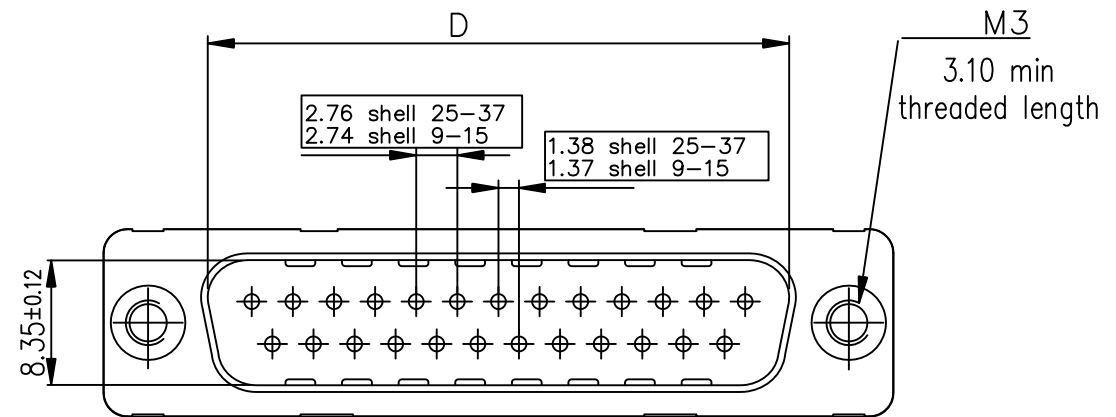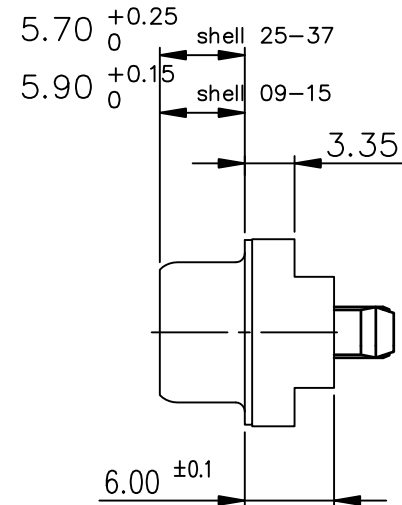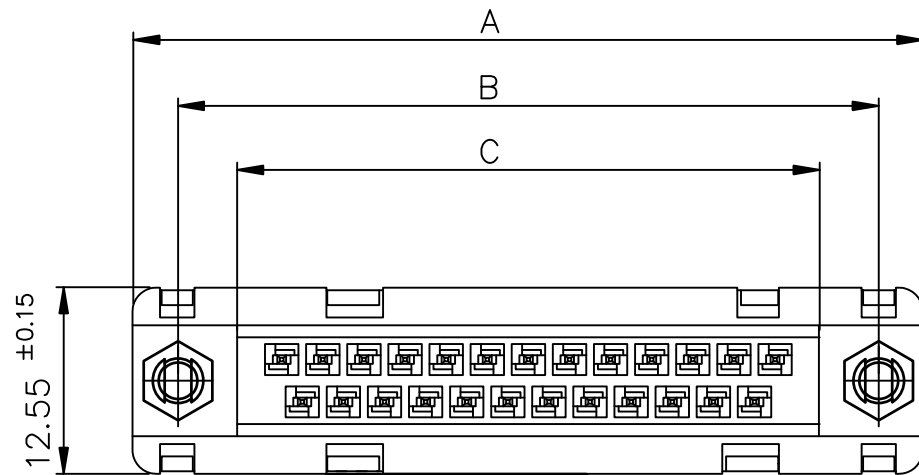

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

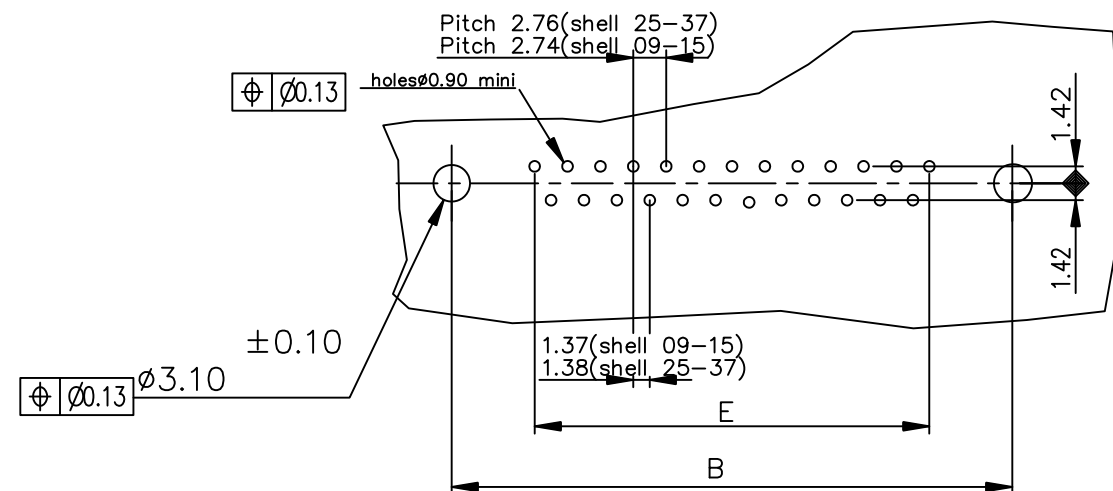

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.GL00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.GL00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.GL00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.GL00LF

Protection: 4 --> Flash Au
6 --> 0.76µ Au

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

mat'l. code —				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family D-SUB			
ltr	ecn no	dr	date	tolerances unless otherwise specified		MM 	title MALE DELTA-D STRAIGHT , SOLDER TYPE			
J	ELX-I-21654	AB	2015-10-26	angles	linear	.0±0.1				
				0°±2°		.00±0.1				
						.000±0.1	scale 2:1	dwg no C01-8646-0099		
				dr	JOUBERT	1994-09-23	sheet 1 of 1			size A3
				engr	ALIAS BABU	2015-10-26	type Product Customer Drawing			
				chr	MITHUN PAUL	2015-10-26				
				appd	BIJU K PAUL	2015-10-26				
sheet index	revision sheet	J	1							