

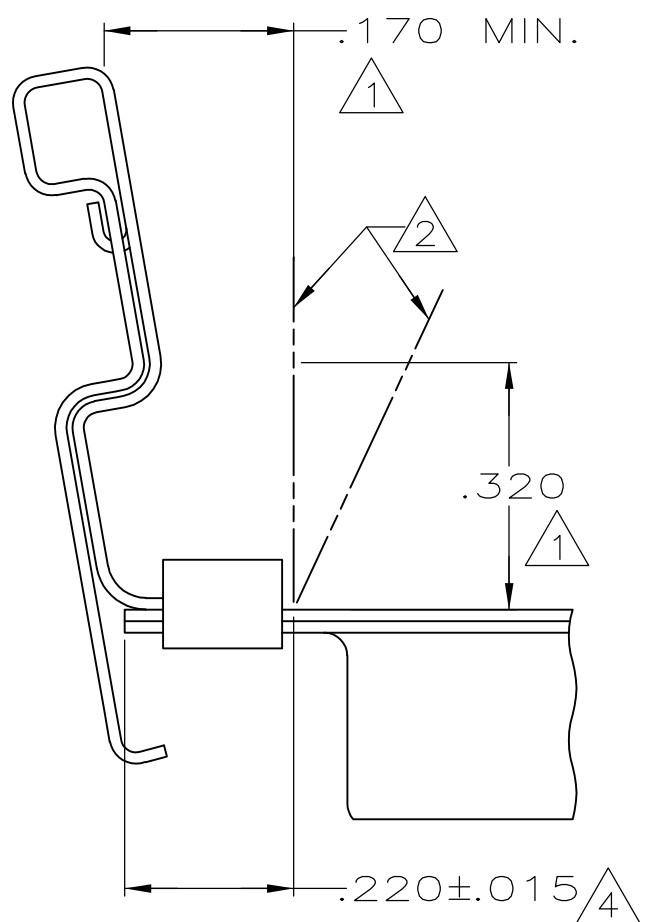
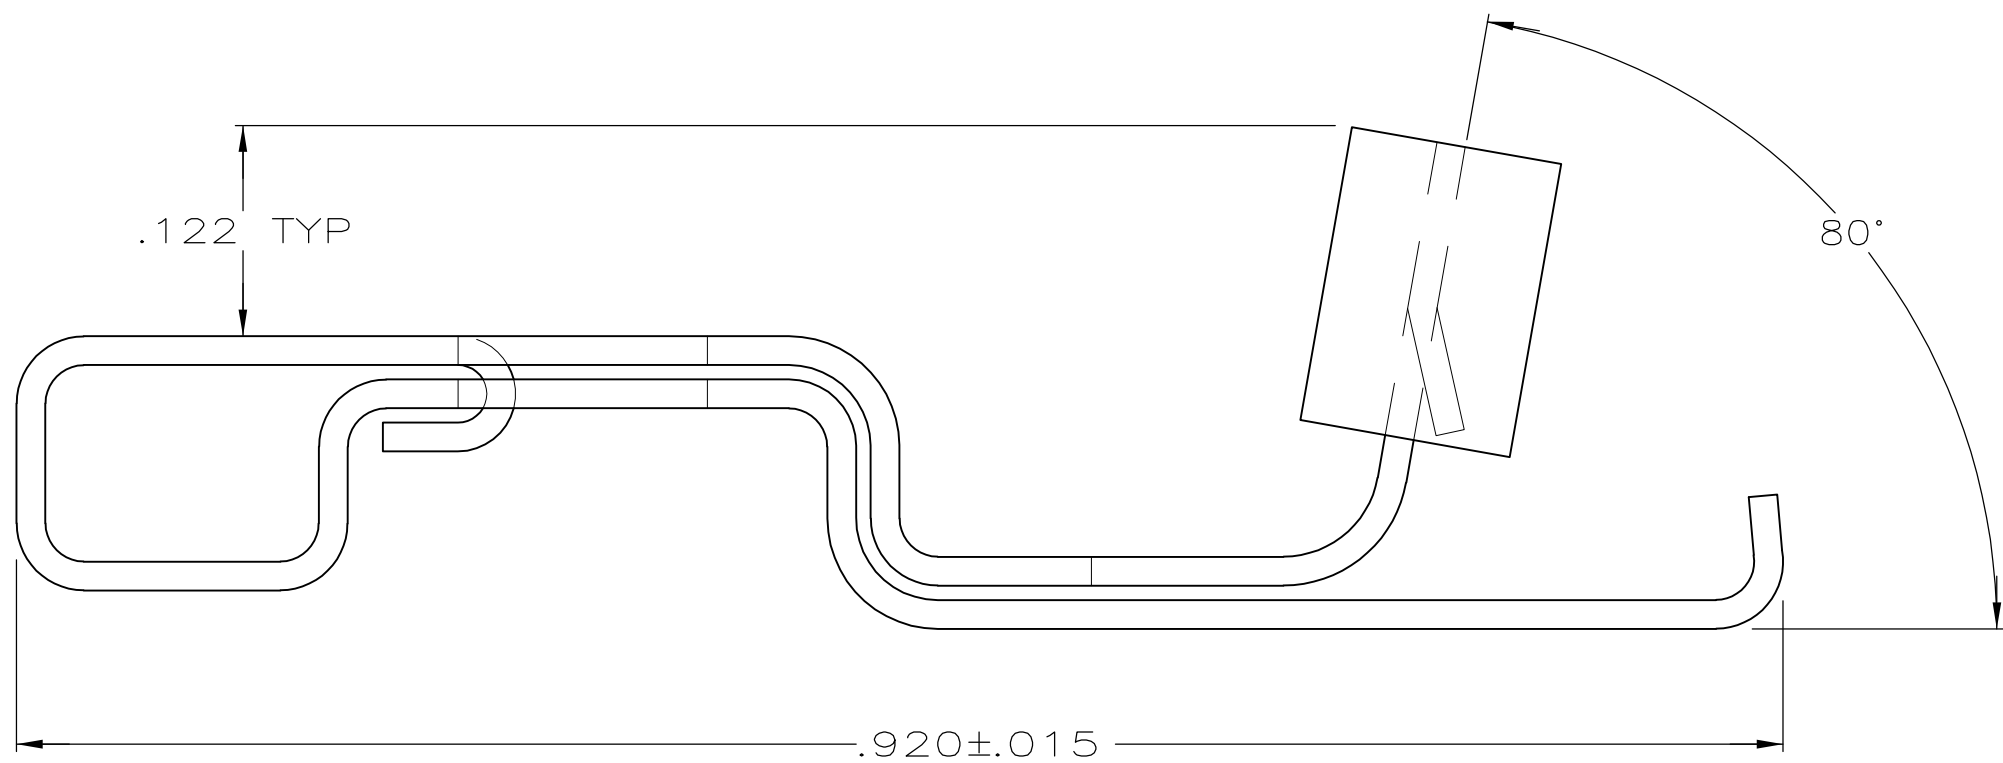


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	F1	REVISED PER ECO-11-004835		11MAR11	RK	HMR	

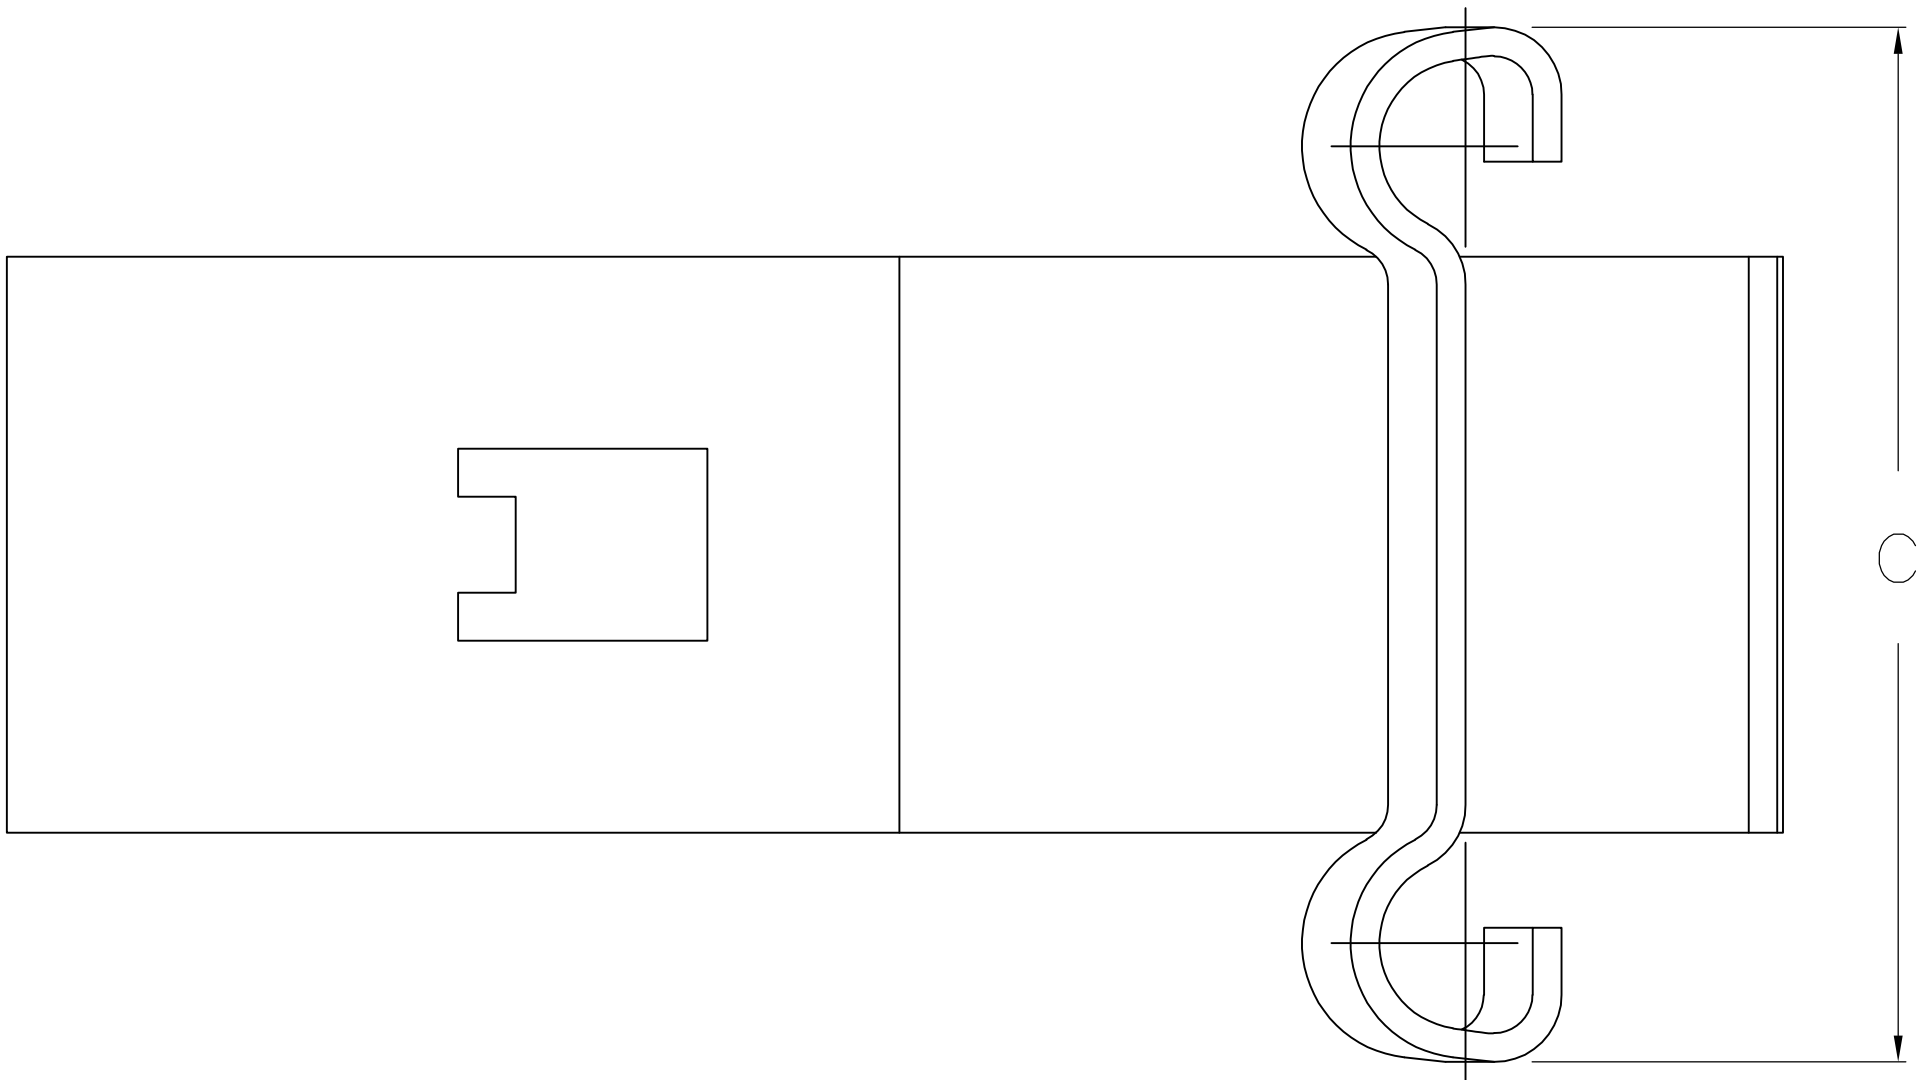


APPLICATION DETAIL

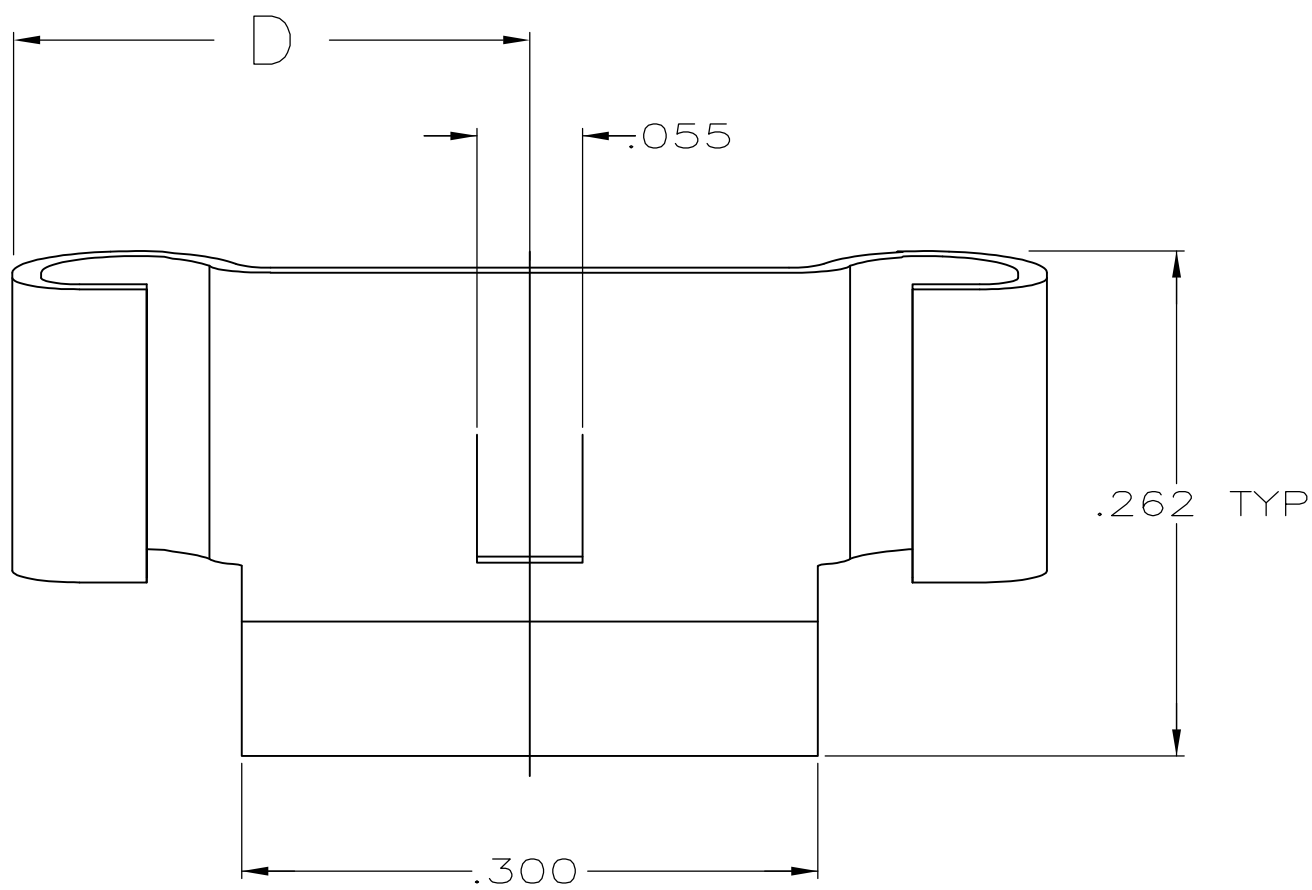

- ⚠ FOR SATISFACTORY OPERATION THESE DIMENSIONS MUST BE MAINTAINED, .170 DIMENSION SHOULD BE MEASURED AT HEIGHT OF .320 MIN.
- ⚠ SPRING LATCH ACCOUNTS FOR DESIGN VARIATIONS IN THE ENVELOPE OF POST MOLDED STRAIN RELIEFS.
- ⚠ WHEN ORDERING SPRING LATCHES SPECIFY NUMBER OF CONNECTORS, QUANTITY SHIPPED WILL BE BASED ON 2 SPRING LATCHES REQUIRED PER CONNECTOR.
- ⚠ MEASURED FROM END OF CONNECTOR FLANGE TO END OF TAB ON SPRING LATCH.

OBSOLETE	.325	.650	BULK ⚠	745779-6
	.325	.650	2 PIECE UNIT	745779-5
	.270	.540	BULK ⚠	745779-3
	.270	.540	2 PIECE UNIT	745779-2
	D	C	KIT PACKAGING	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.GERACE	02-24-83	 TE Connectivity			
		CHK J.GERACE	02-24-83				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME SPRING LATCH, 2 PIECE, AMPLIMITE™			
		APVD R.LEGGETT					
		—		—			
		APPLICATION SPEC		—			
		—		—			
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
STAINLESS STEEL		—		A2	00779	C-745779	—
CUSTOMER DRAWING				SCALE	10:1	SHEET	1 of 1
				REV	F1		