Part number

CX 17 DF

Brief description:

female insert, 17 poles, crimp connections, 10A 160V, 3, 1 module, modular units series MIXO

Product description	
Model	female insert
Version	Crimp connection
Product type	for female contacts 10A
Family	MIXO series, customizable inserts
Size	1 module
N. of poles	17 poles
Technical data	
Current	10 A (A.C. and D.C.)
Voltage	160 V
Pollution degree	3
Operating temperature range (min, max)	-40°C … +125°C
IP degree of protection	IP20 without enclosure; IP65/IP66/IP67/IP68 with enclosure
Further technical details	
Characteristics according to EN 61984	10A 160V 2.5kV 3; 10A 250V 4kV 2
Insulation resistance	≥ 10 GΩ
Rated voltage according to UL/CSA	600V
UL 94 flammability rating	V-0
Weight	10,20 g

Approvals / Standards	
Reference standard	EN 61984:2009-06
Quality mark	DNV-GL, EAC
Conformity	CQC, CE
General ordering information	
EAN13 code	8015747109765
Tariff number	85369095
Packaging Information	
Packaging length	180,00 mm
Packaging height	130,00 mm
Packaging width	150,00 mm
Packaging weight	0,80 kg
Packaging volume	3,51 dm³
Packaging description	Carton box
Packaging quantity	60 Pcs
Packaging EAN code	8015747221337
Sub-packaging length	35,00 mm
Sub-packaging height	40,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	0,13 kg
Sub-packaging volume	0,22 dm³
Sub-packaging description	Carton
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747173278

Part number

CX 17 DF

Catalogue drawings

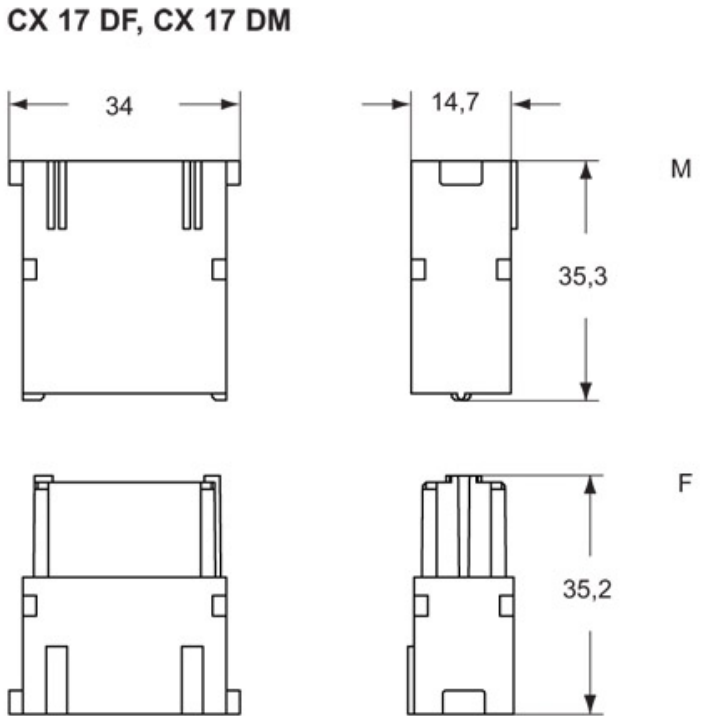

Catalogue drawings

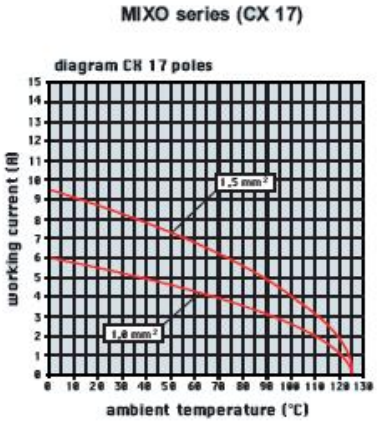

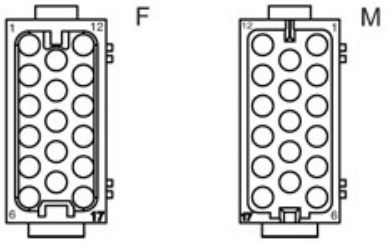

Notes

CX 17 D inserts:

- characteristics according to EN 61984:
(10A 160V 2,5kV 3)
(10A 250V 4kV 2)
- certifications: (UL), (CSA), (CCC); the certifications shown in brackets are being applied for
- for contact crimping, see the crimp tool section (10A contacts, CDF and CDM series)
- 1 frame slot

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support