

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
CM	53	AB6	REVISED	PER ECR-17-006277	24MAY2017	BW




REV	BY	DATE	DESCRIPTION
1	AB6	24MAY2017	REVISED PER ECR-17-006277

D


C

B



A

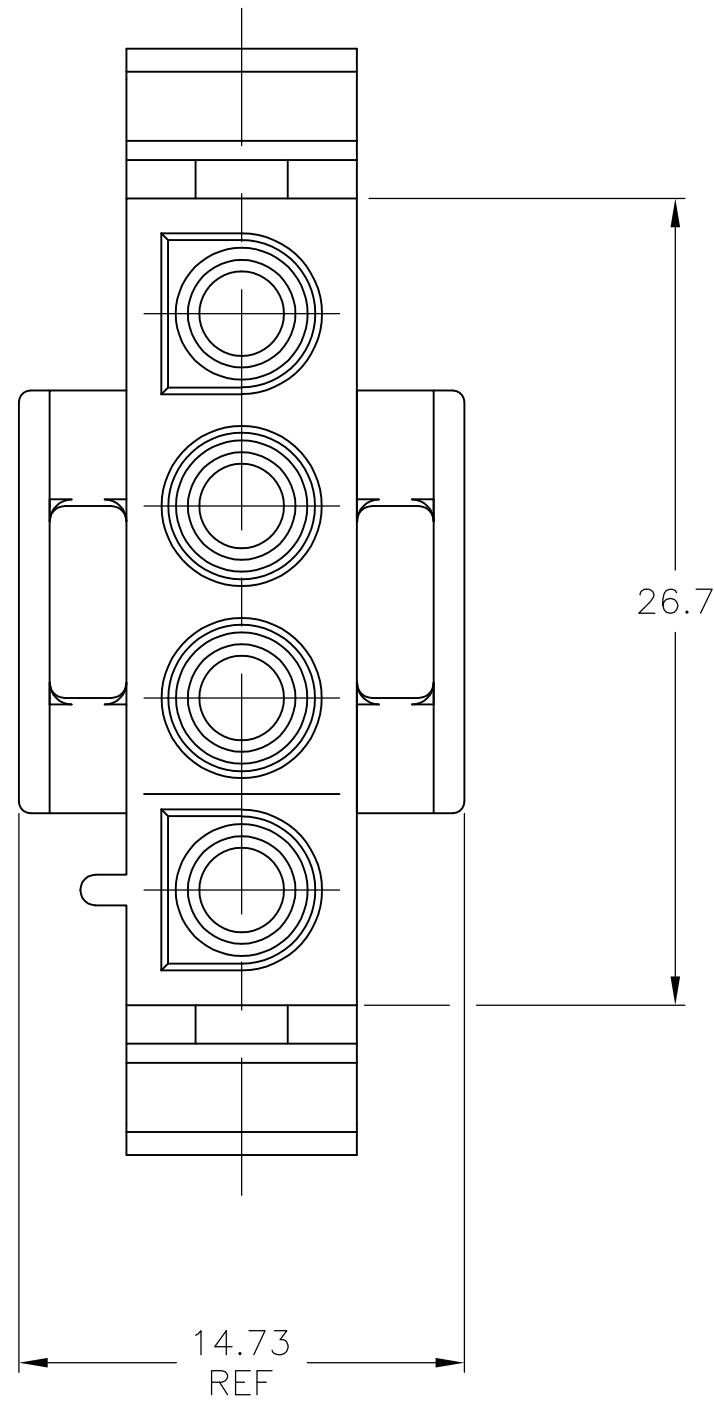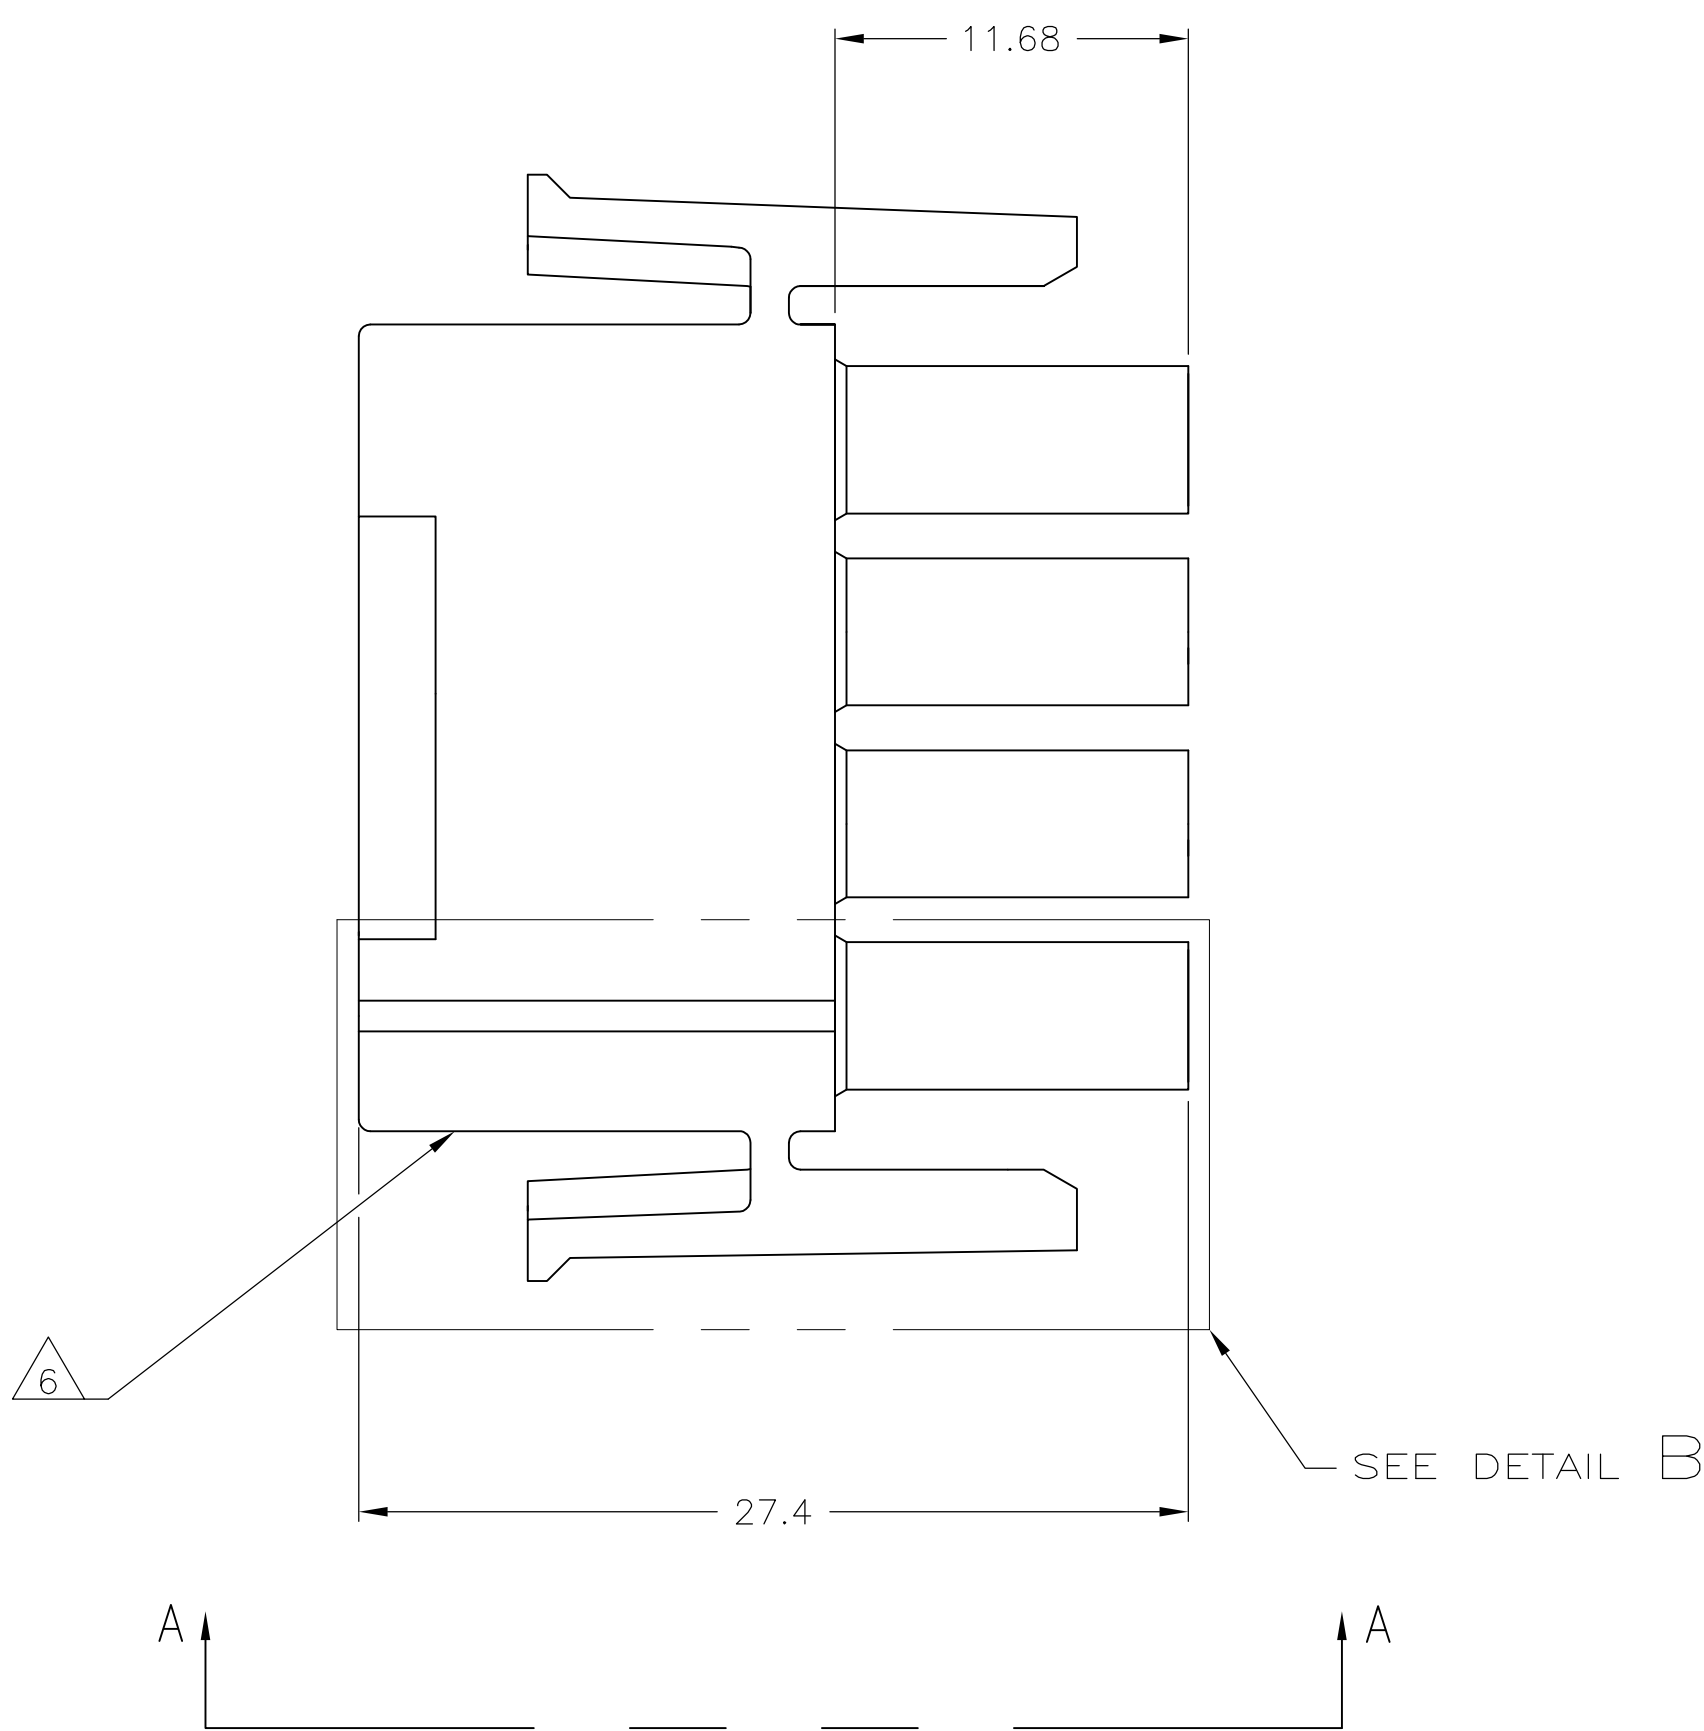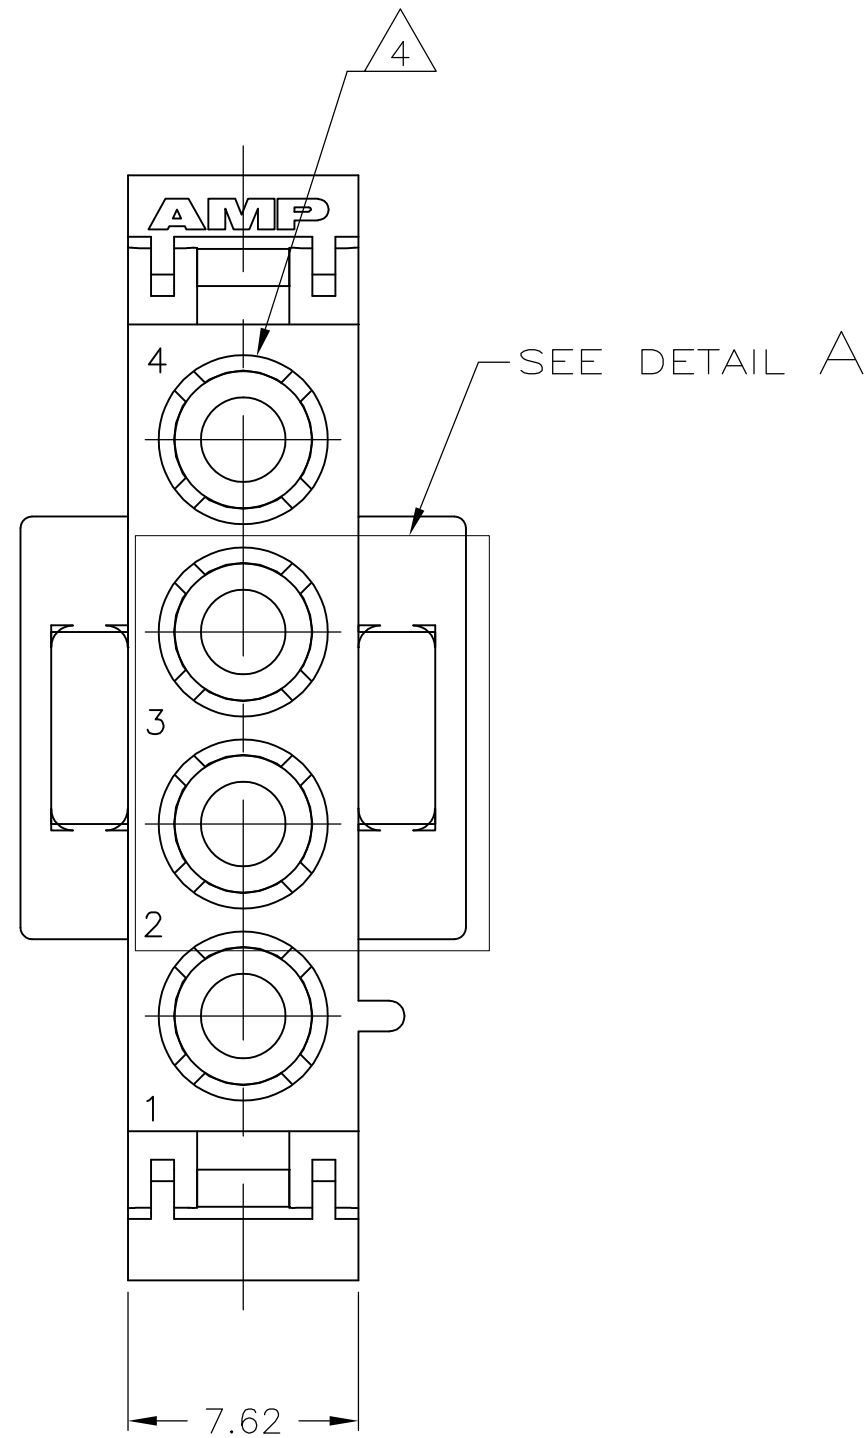


- 1
- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™CAP OR HEADER.
- 2
- SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
- 3
- DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- 4
- FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION,OPTIONAL.
- 5
- NOT MANUFACTURED IN U.S.
- 6
- UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
- 7
- MATERIAL CORRESPONDING TO THE REQUIREMENT OF IEC60335-1 (INCL. GWT 750°C WITHOUT FLAME)

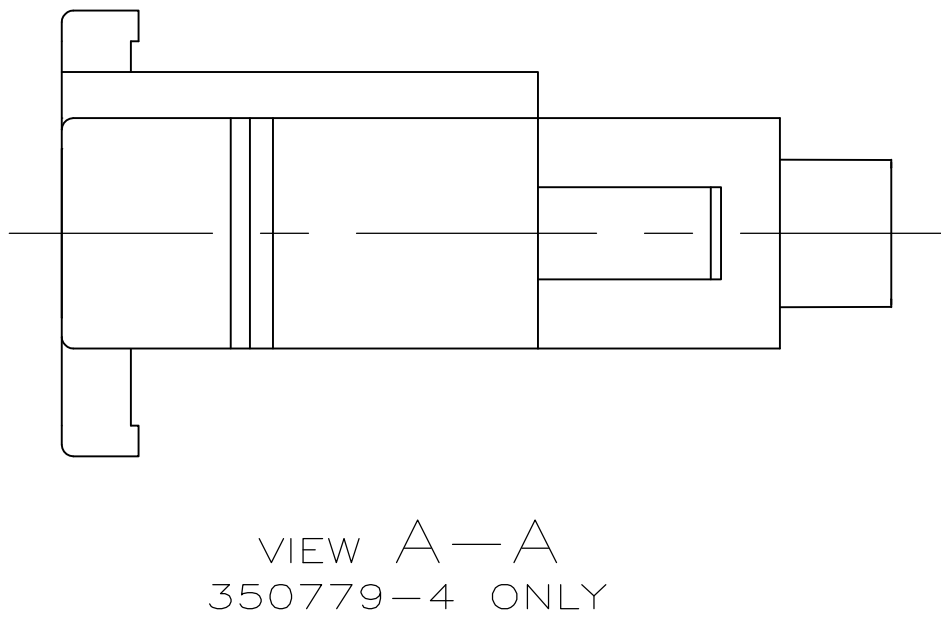


VIEW A—A
350779-4 ONLY

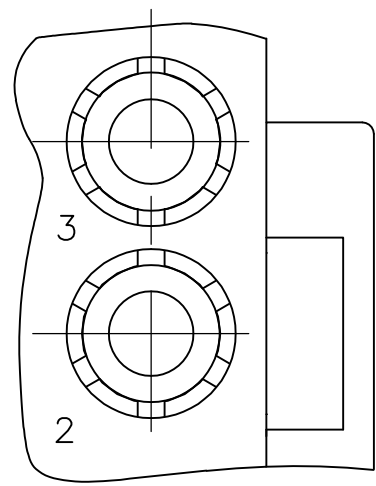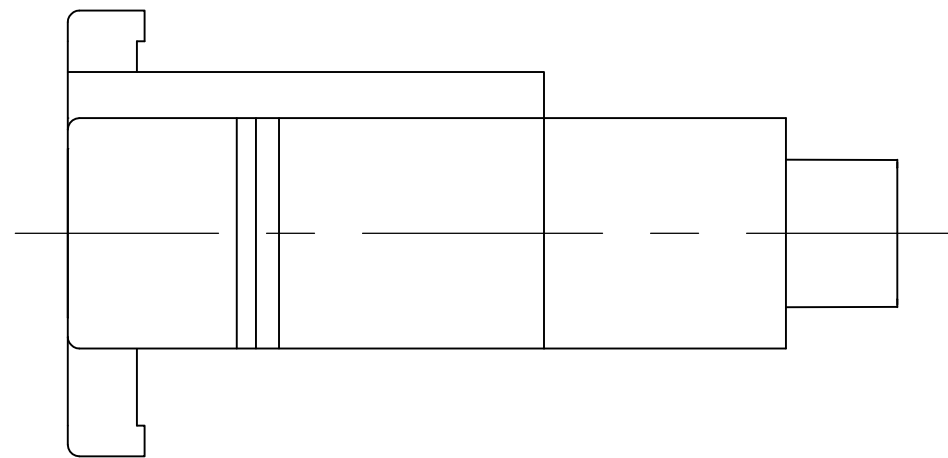


DETAIL A
OPTIONAL CONSTRUCTION

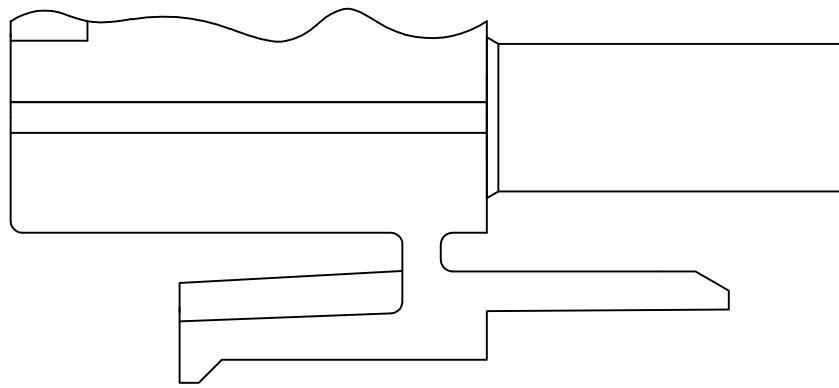

DETAIL B
350779-4 ONLY

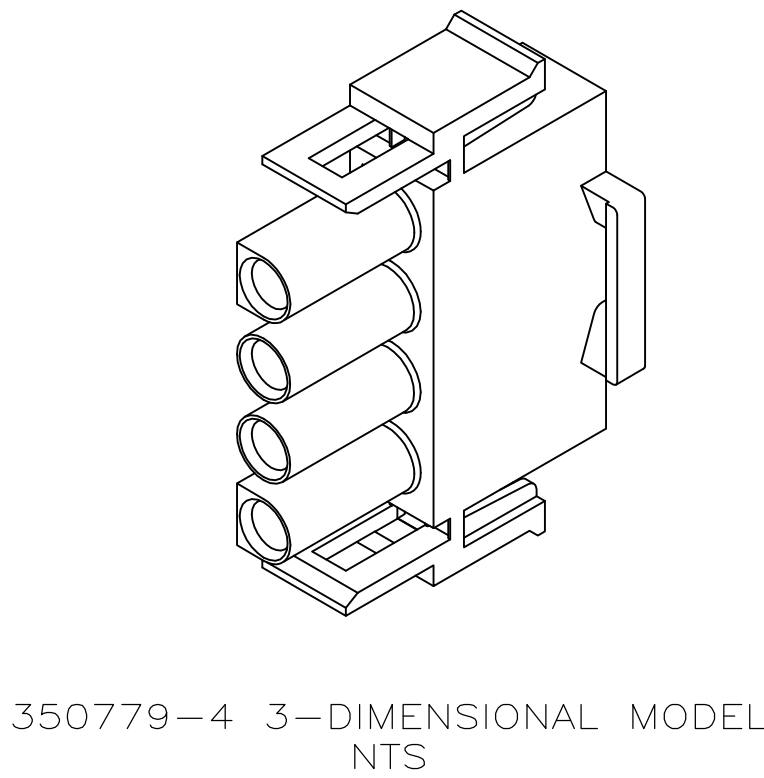

350779-4 3-DIMENSIONAL MODEL
NTS

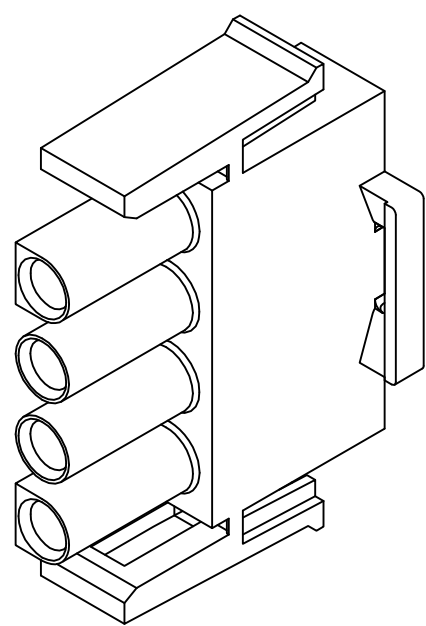

3-DIMENSIONAL MODEL
NTS

	NATURAL	350779-5
	BLACK	1-350779-9
	GRAY	1-350779-8
	BLUE	1-350779-6
	GREEN	1-350779-5
	YELLOW	1-350779-4
	ORANGE	1-350779-3
	RED	1-350779-2
	BROWN	1-350779-1
	NATURAL	350779-4
	COLOR	350779-1
		PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN R. VESTAL 03FEB95		 TE Connectivity									
				CHK R. SWING 03FEB95											
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROD D SELF 03FEB95		NAME		PLUG, 4 CIRCUIT, UNIVERSAL MATE-N-LOK™ —							
		0 PLC ± —		PRODUCT SPEC		SIZE						CAGE CODE		DRAWING NO	
		1 PLC ± 0.4		APPLICATION SPEC				A1		00779		C=350779		—	
MATERIAL NYLON,UL 94V-0		FINISH		WEIGHT		CUSTOMER DRAWING		SCALE		SHEET		1 OF 1		REV. AB	
		—						4:1							