THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION 2017
© COPYRIGHT 1997 BY TE CONNECTIVITY ALL RIGHTS RESERVED.

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | C | REVISED PER PCN E-18-001206 | 24JAN2018 | JA | DM |

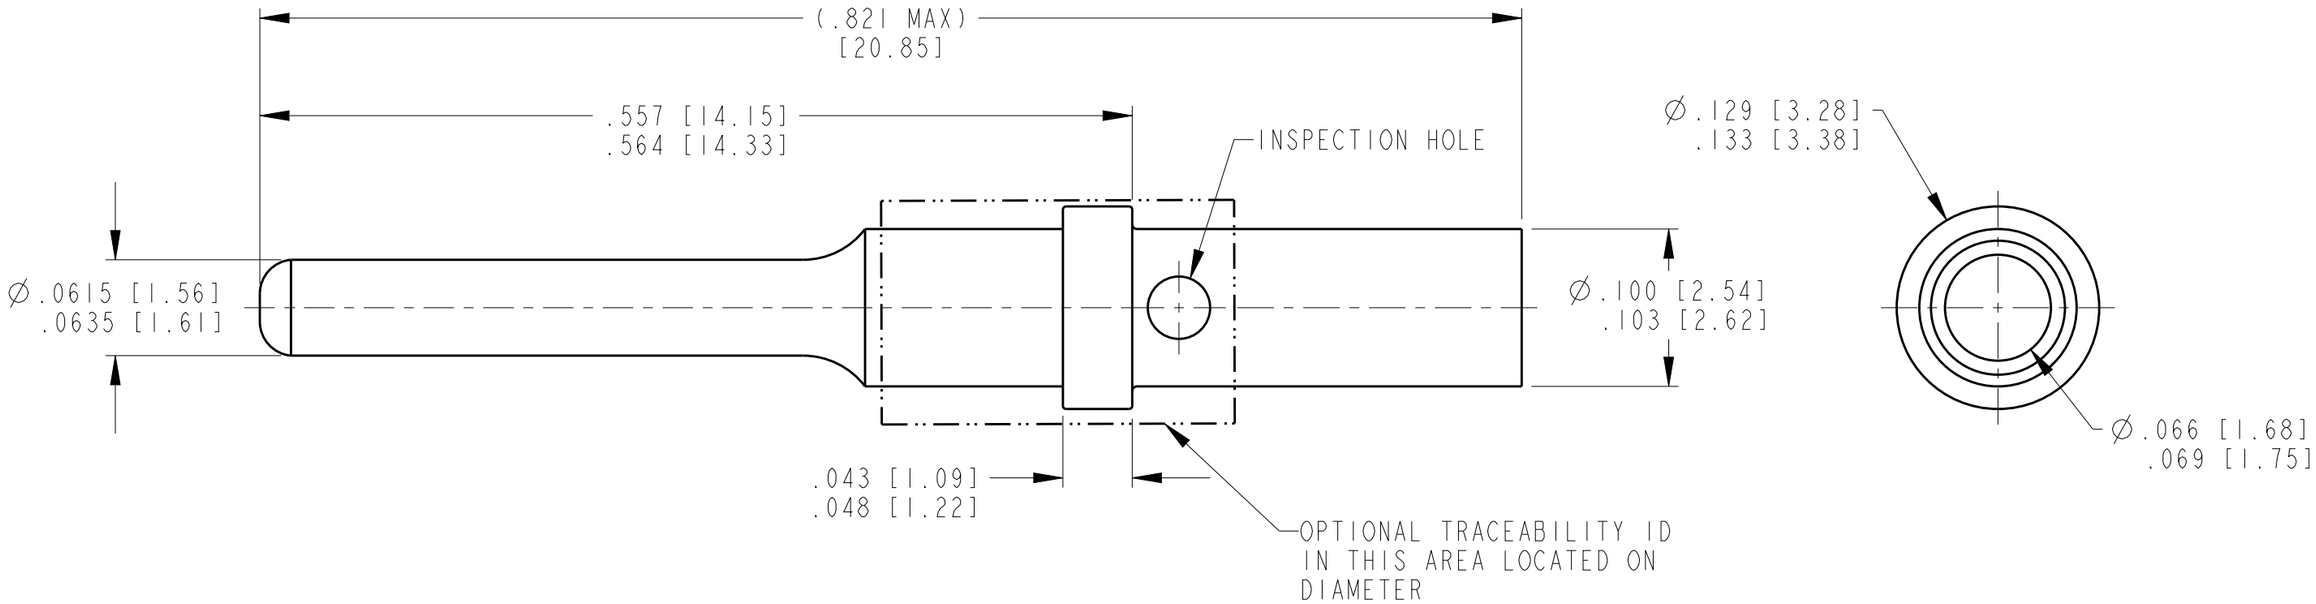


| TE INTERNAL PN | DEUTSCH PN | PLATING |
|---|---|---|
| 0460-202-1631 | 0460-202-1631 | GOLD |
| 0460-202-16141 | 0460-202-16141 | NICKEL |

1. WIRE RANGE: 20 AWG TO 16 AWG [0.50-1.5 mm²].

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL

FINISH

DWN D.MEYER 18DEC1997
CHK VLADIMIR TOMSA 25MAY1999
APVD R.REED 25MAY1999
PRODUCT SPEC 0425-015-0000
APPLICATION SPEC 0425-205-0000
WEIGHT 0.55g

CUSTOMER DRAWING

TE Connectivity

NAME CONTACT PIN SIZE 16

SIZE A3 | CAGE CODE 4AFU8 | DRAWING NO C-0460-202-16XX | RESTRICTED TO

SCALE 10:1 | SHEET 1 OF 1 | REV C

1470-19 (3/13)