


TECHNICAL DATA SHEET
STP-02 Rev.2 del 10/06/2010
Page 1 of 2

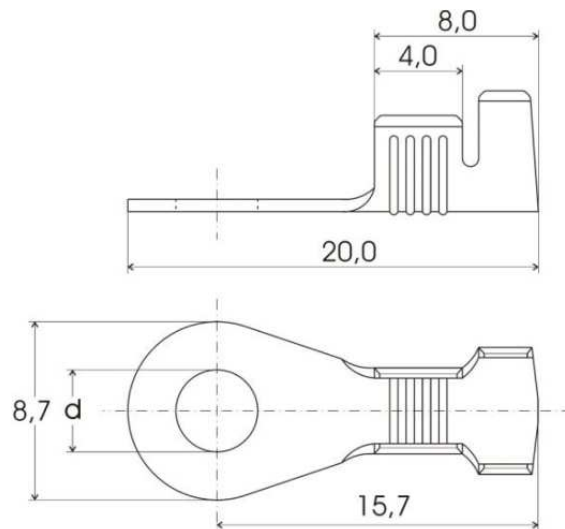

EYELET TERMINALS

CODE	(HOLE DIAMETER)	WIRE RANGE (mmq)	Ø INSULATING (mm)	MATERIAL THICK (mm)	MATERIAL
C804/M.05.00.3	4,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn
C804/M.05.01.3	4,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn gal Sn
C805/M.05.00.3	5,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn
C805/M.05.01.3	5,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn gal Sn
C806/M.05.00.3	6,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn
C806/M.05.01.3	6,2	1,0 – 2,5	2,5 - 4,0	0.50	CuZn gal Sn

TECHNICAL DATA SHEET
STP-02 Rev.2 del 10/06/2010
Page 2 of 2

CRIMP TENSILE STRENGTH

In accordance with our Internal Specifications I.O. 11/10
NORME CEI EN 61210

Test Parameters:

Speed: 25 mm/min

Samples tested: n° 24

Equipment used ALLURIS FMT- 300

SECTION (mmq)	H (mm)	W (mm)	REQUIRED MINIMUM RETENTION FORCE (N)	MESURED MINIMUM RETENTION FORCE (N)
1,0	2,19	3,07	108	198
1,5	2,31	3,08	150	237
1,0 +1,0	2,51	3,09	108	202
2,5	2,59	3,10	230	321

Peak temperature °C

CuZn -30°C/ +105°C
CuZn gal Sn -30° C / + 120° C

ISSUE N°	DATE	TEST PERFORMED BY	Checked by
1	22/11/2017	Tomaini	Sambri M.