
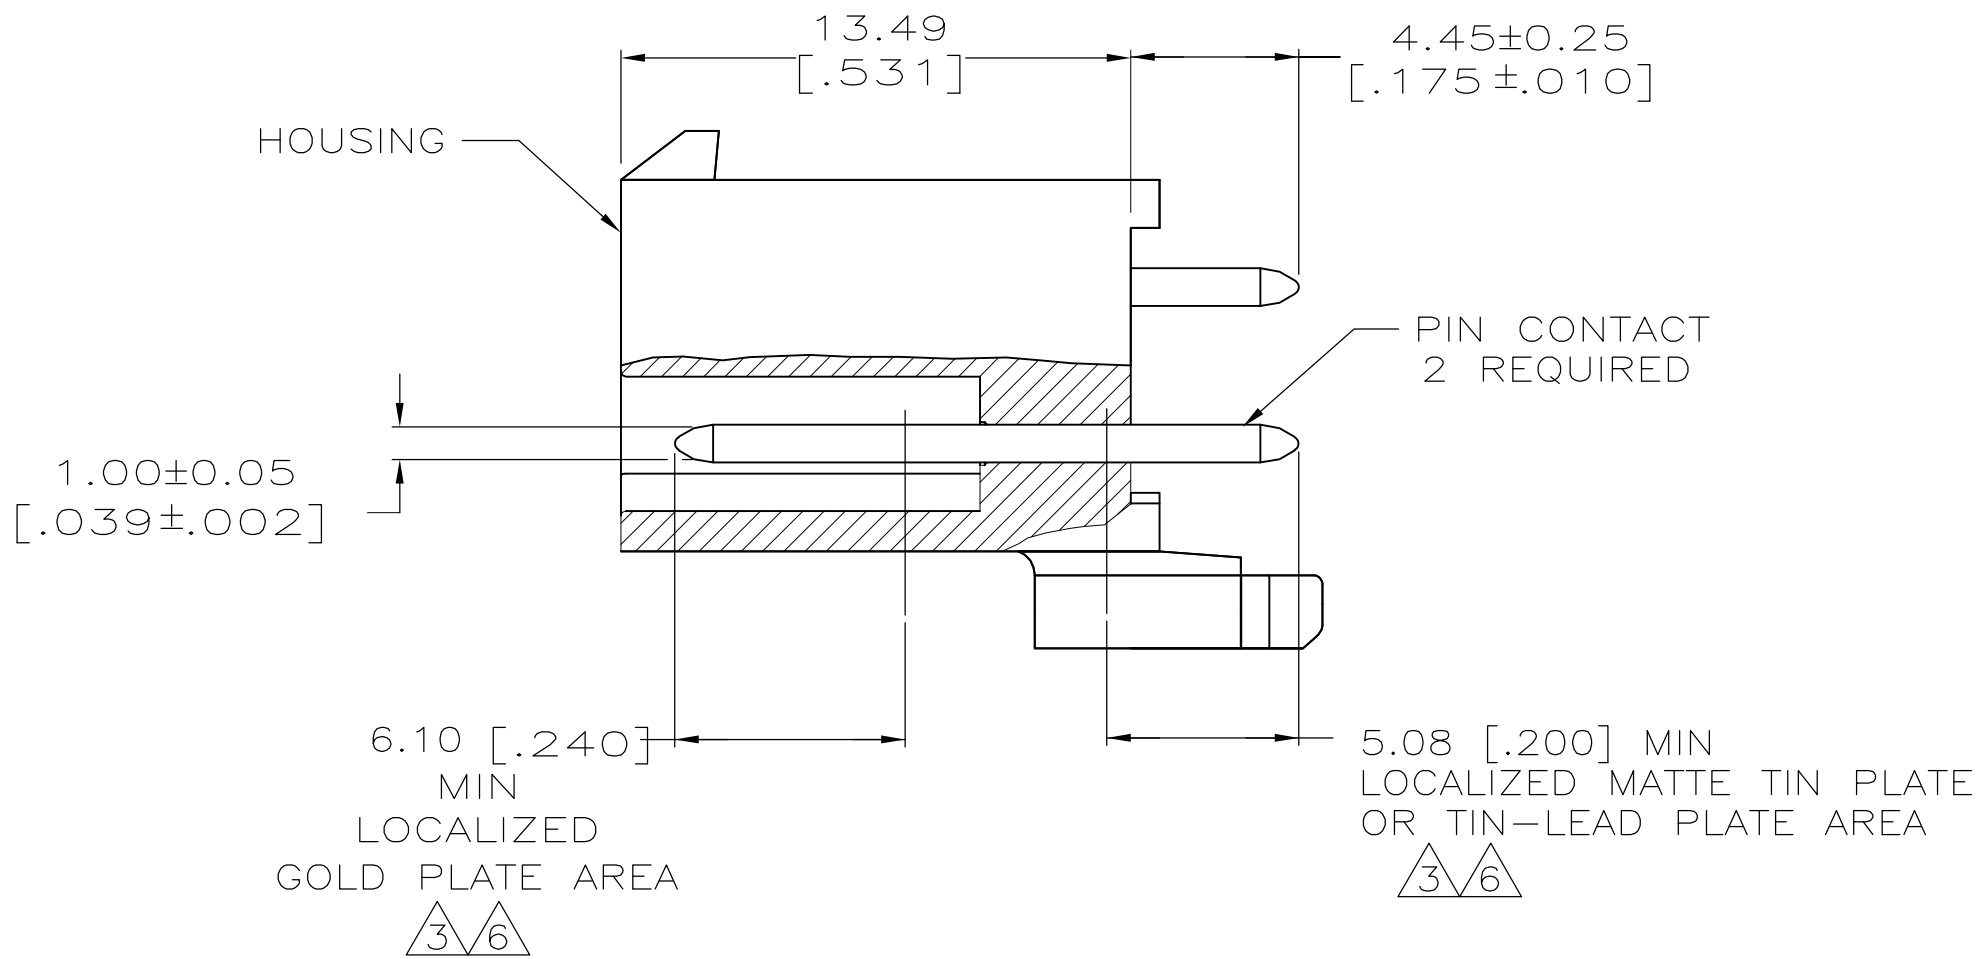



LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
			J	REVISED PER ECR-15-010337	23JUL2015	RK SC

D

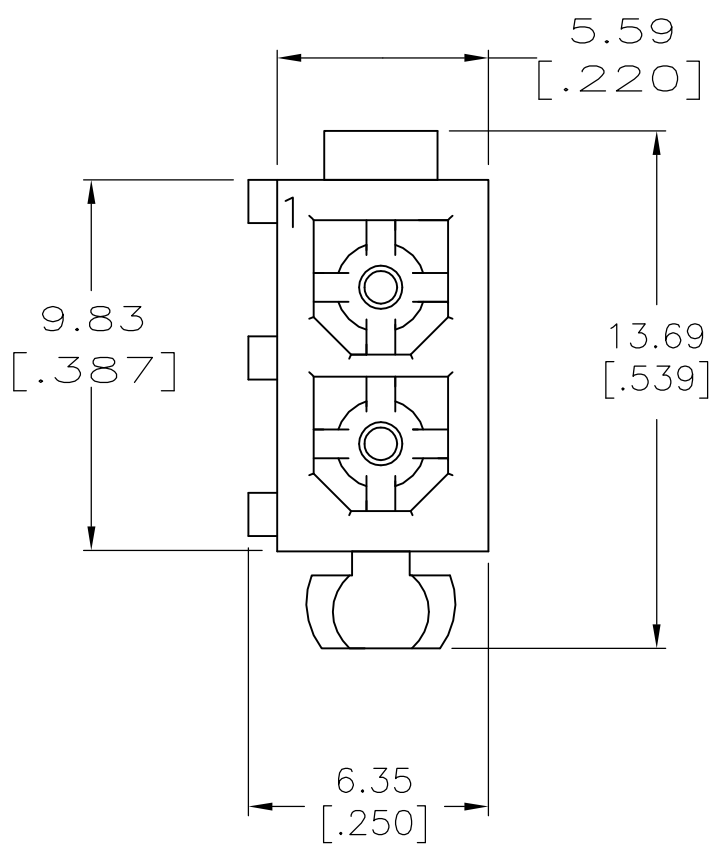

C

B

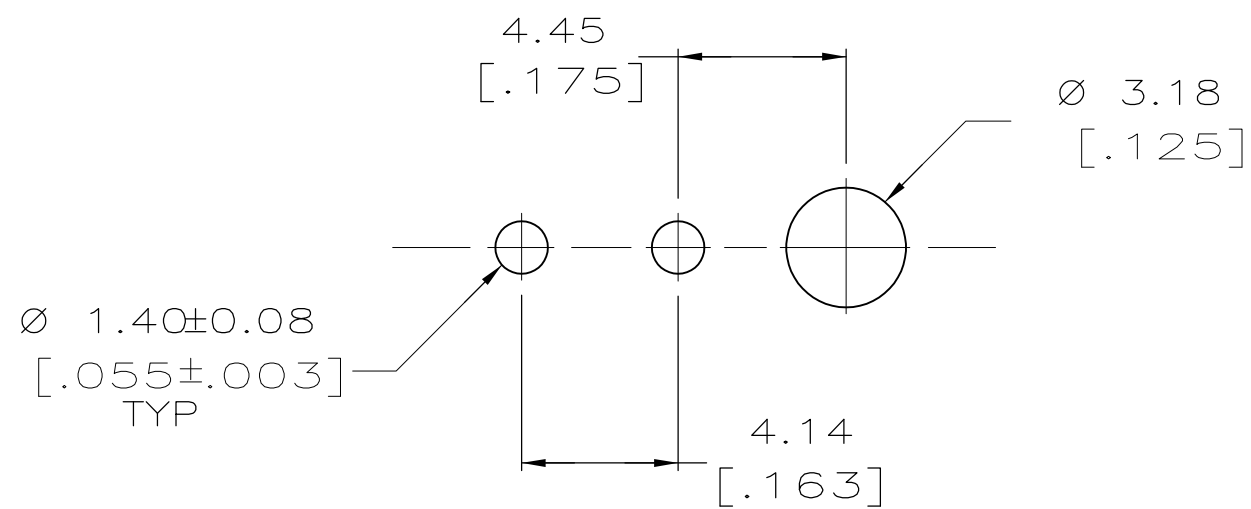

RECOMMENDED LAYOUT FOR 1.57[.062] THICK BOARD
TOLERANCES NON-ACCUMULATIVE

1. PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.

2. DIMENSIONS SHOWN IN BRACKETS ARE IN INCHES.

3 0.00076 [.000030] MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 [.000150] MATTE TIN LEAD IN THE LOCALIZED TIN LEAD PLATE AREA, BOTH OVER 0.00127 [.000050] MIN NICKEL.

4 0.00381 [.000150] MATTE TIN LEAD OVER 0.00127 [.000050] MIN NICKEL ENTIRE LENGTH OF PIN.

5 0.00381 [.000150] MATTE TIN OVER 0.00127 [.000050] MIN NICKEL ENTIRE LENGTH OF PIN.

6 0.00076 [.000030] MIN GOLD PLATE IN THE LOCALIZED GOLD PLATE AREA, 0.00381 [.000150] MATTE TIN LEAD IN THE LOCALIZED TIN LEAD PLATE AREA, BOTH OVER 0.00127 [.000050] MIN NICKEL.

D

C

770872

B

BRASS	6	NYLON, UL94V-0	WHITE	1-770872-1
BRASS	5	NYLON, UL94V-0	WHITE	1-770872-0
BRASS	3	NYLON, UL94V-0	WHITE	770872-2
BRASS	4	NYLON, UL94V-0	WHITE	770872-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER CHK R JONES APVD R JONES PRODUCT SPEC — APPLICATION SPEC — WEIGHT — CUSTOMER DRAWING	08JUN05 28JUL2003 28JUL2003	 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME HEADER ASSEMBLY, CLOSED BOTTOM, 2 CKT, MINI UNIVERSAL, MATE-N-LOK	
		0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 3 PLC ± — 4 PLC ± — ANGLES ± —			
MATERIAL —	FINISH —	SIZE A2		CAGE CODE 00779	DRAWING NO C=770872
		RESTRICTED TO —		SCALE 5:1	SHEET 1 of 1
				REV J	

A