

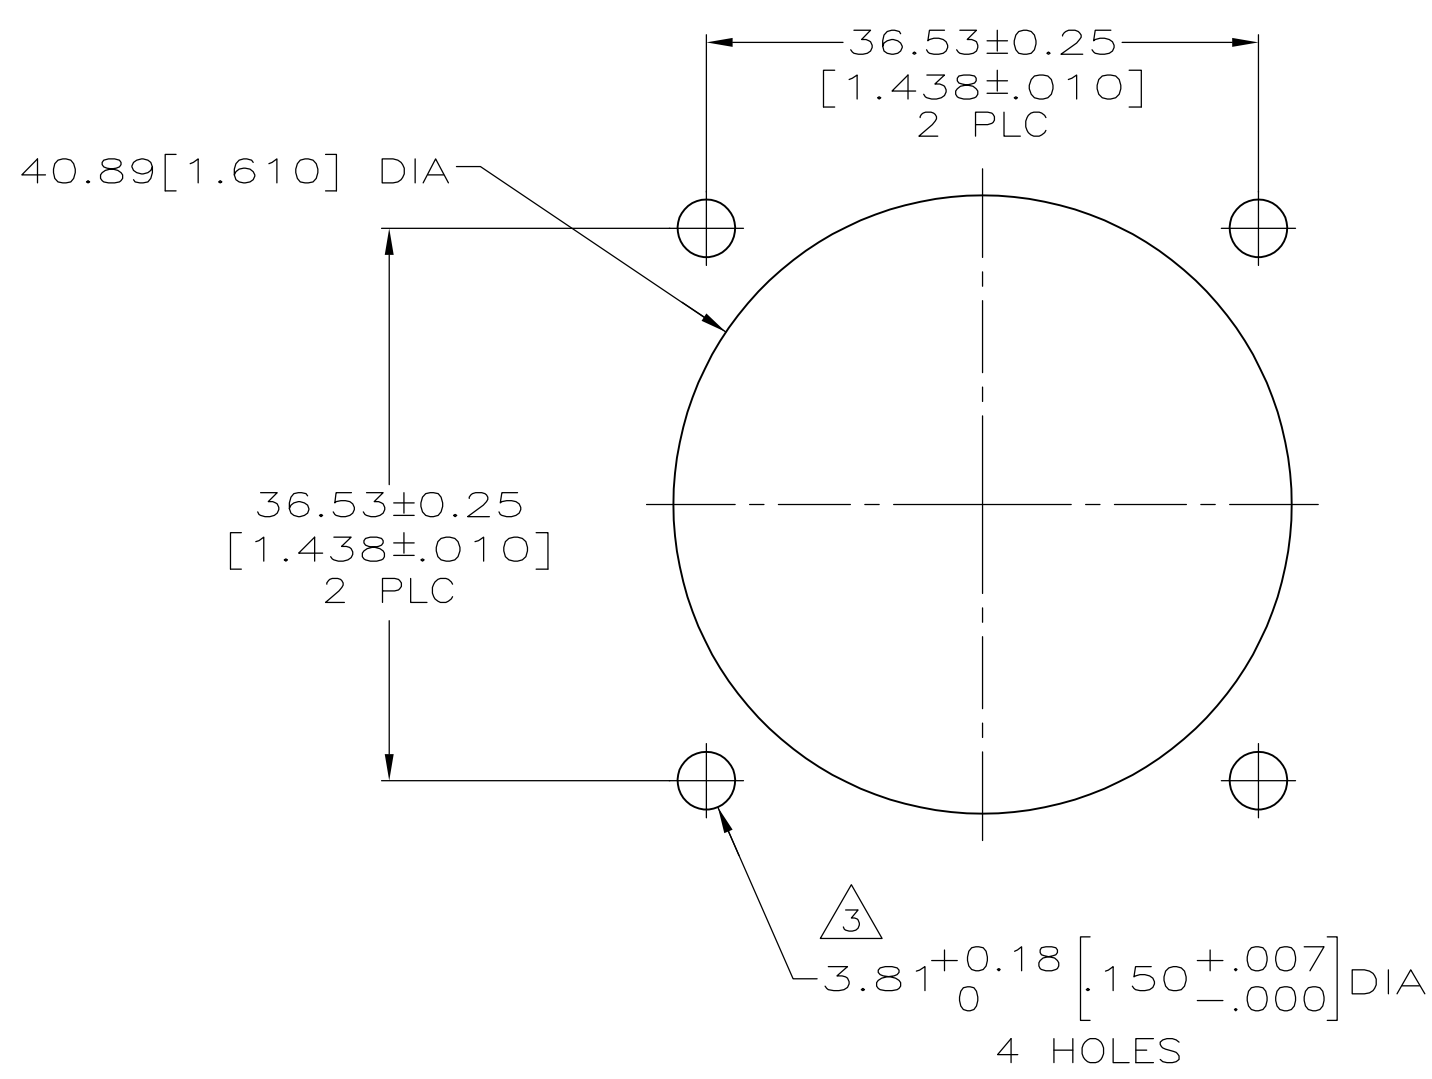
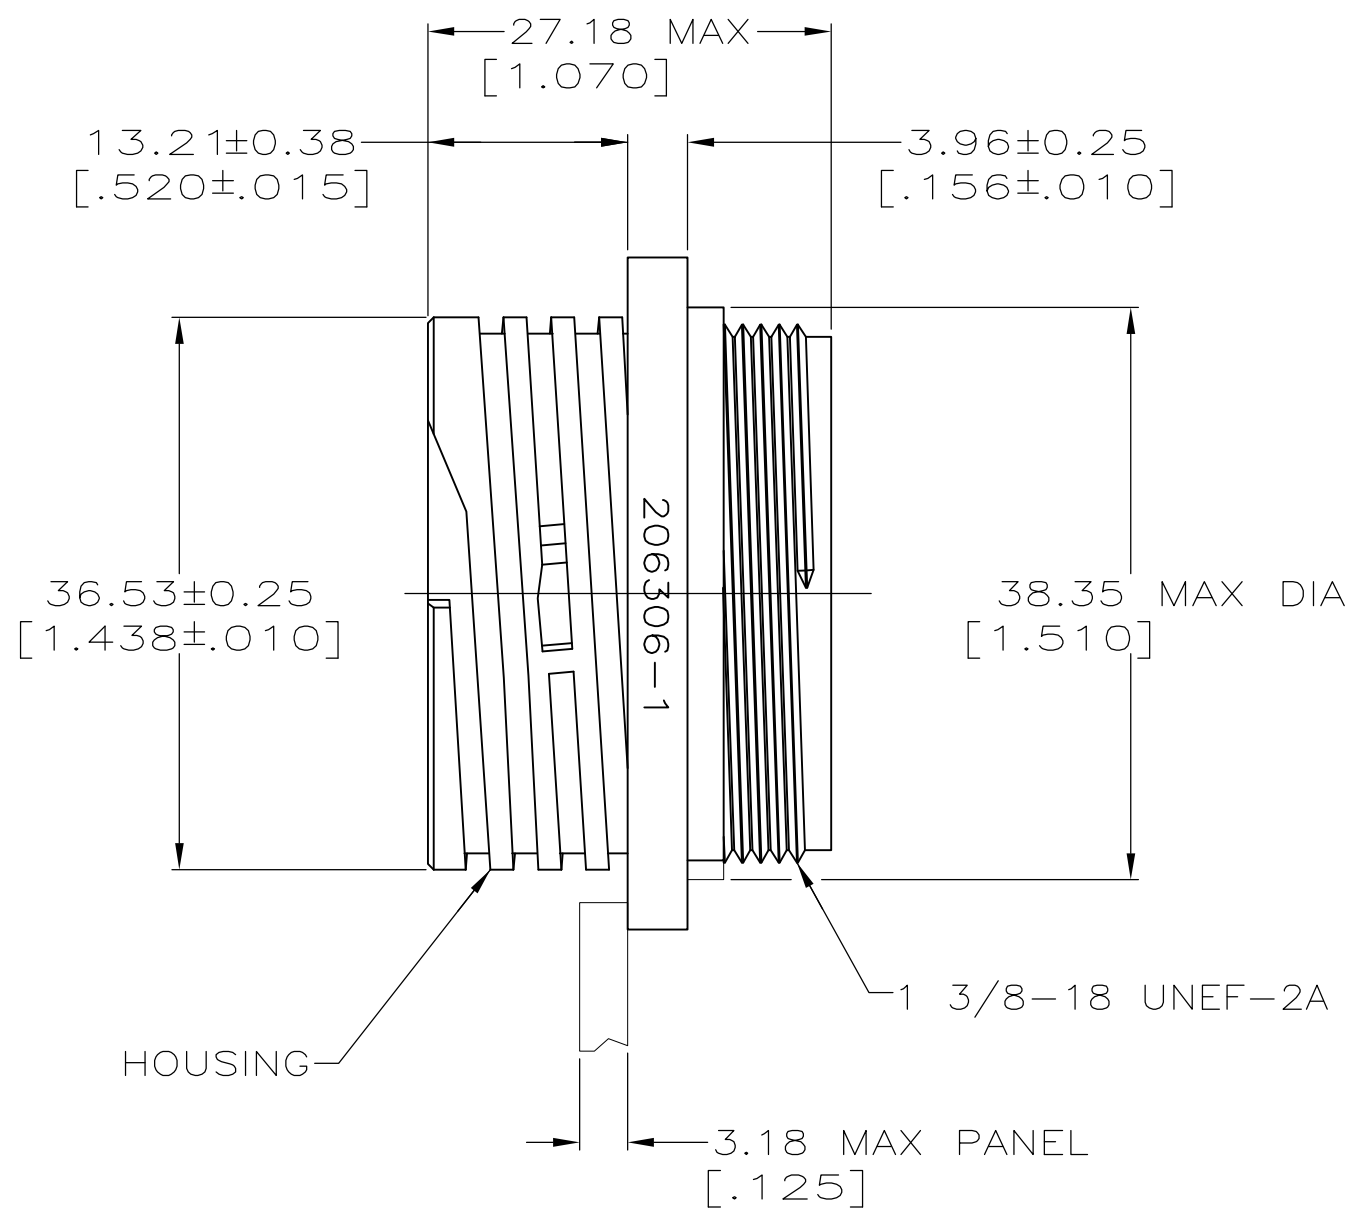
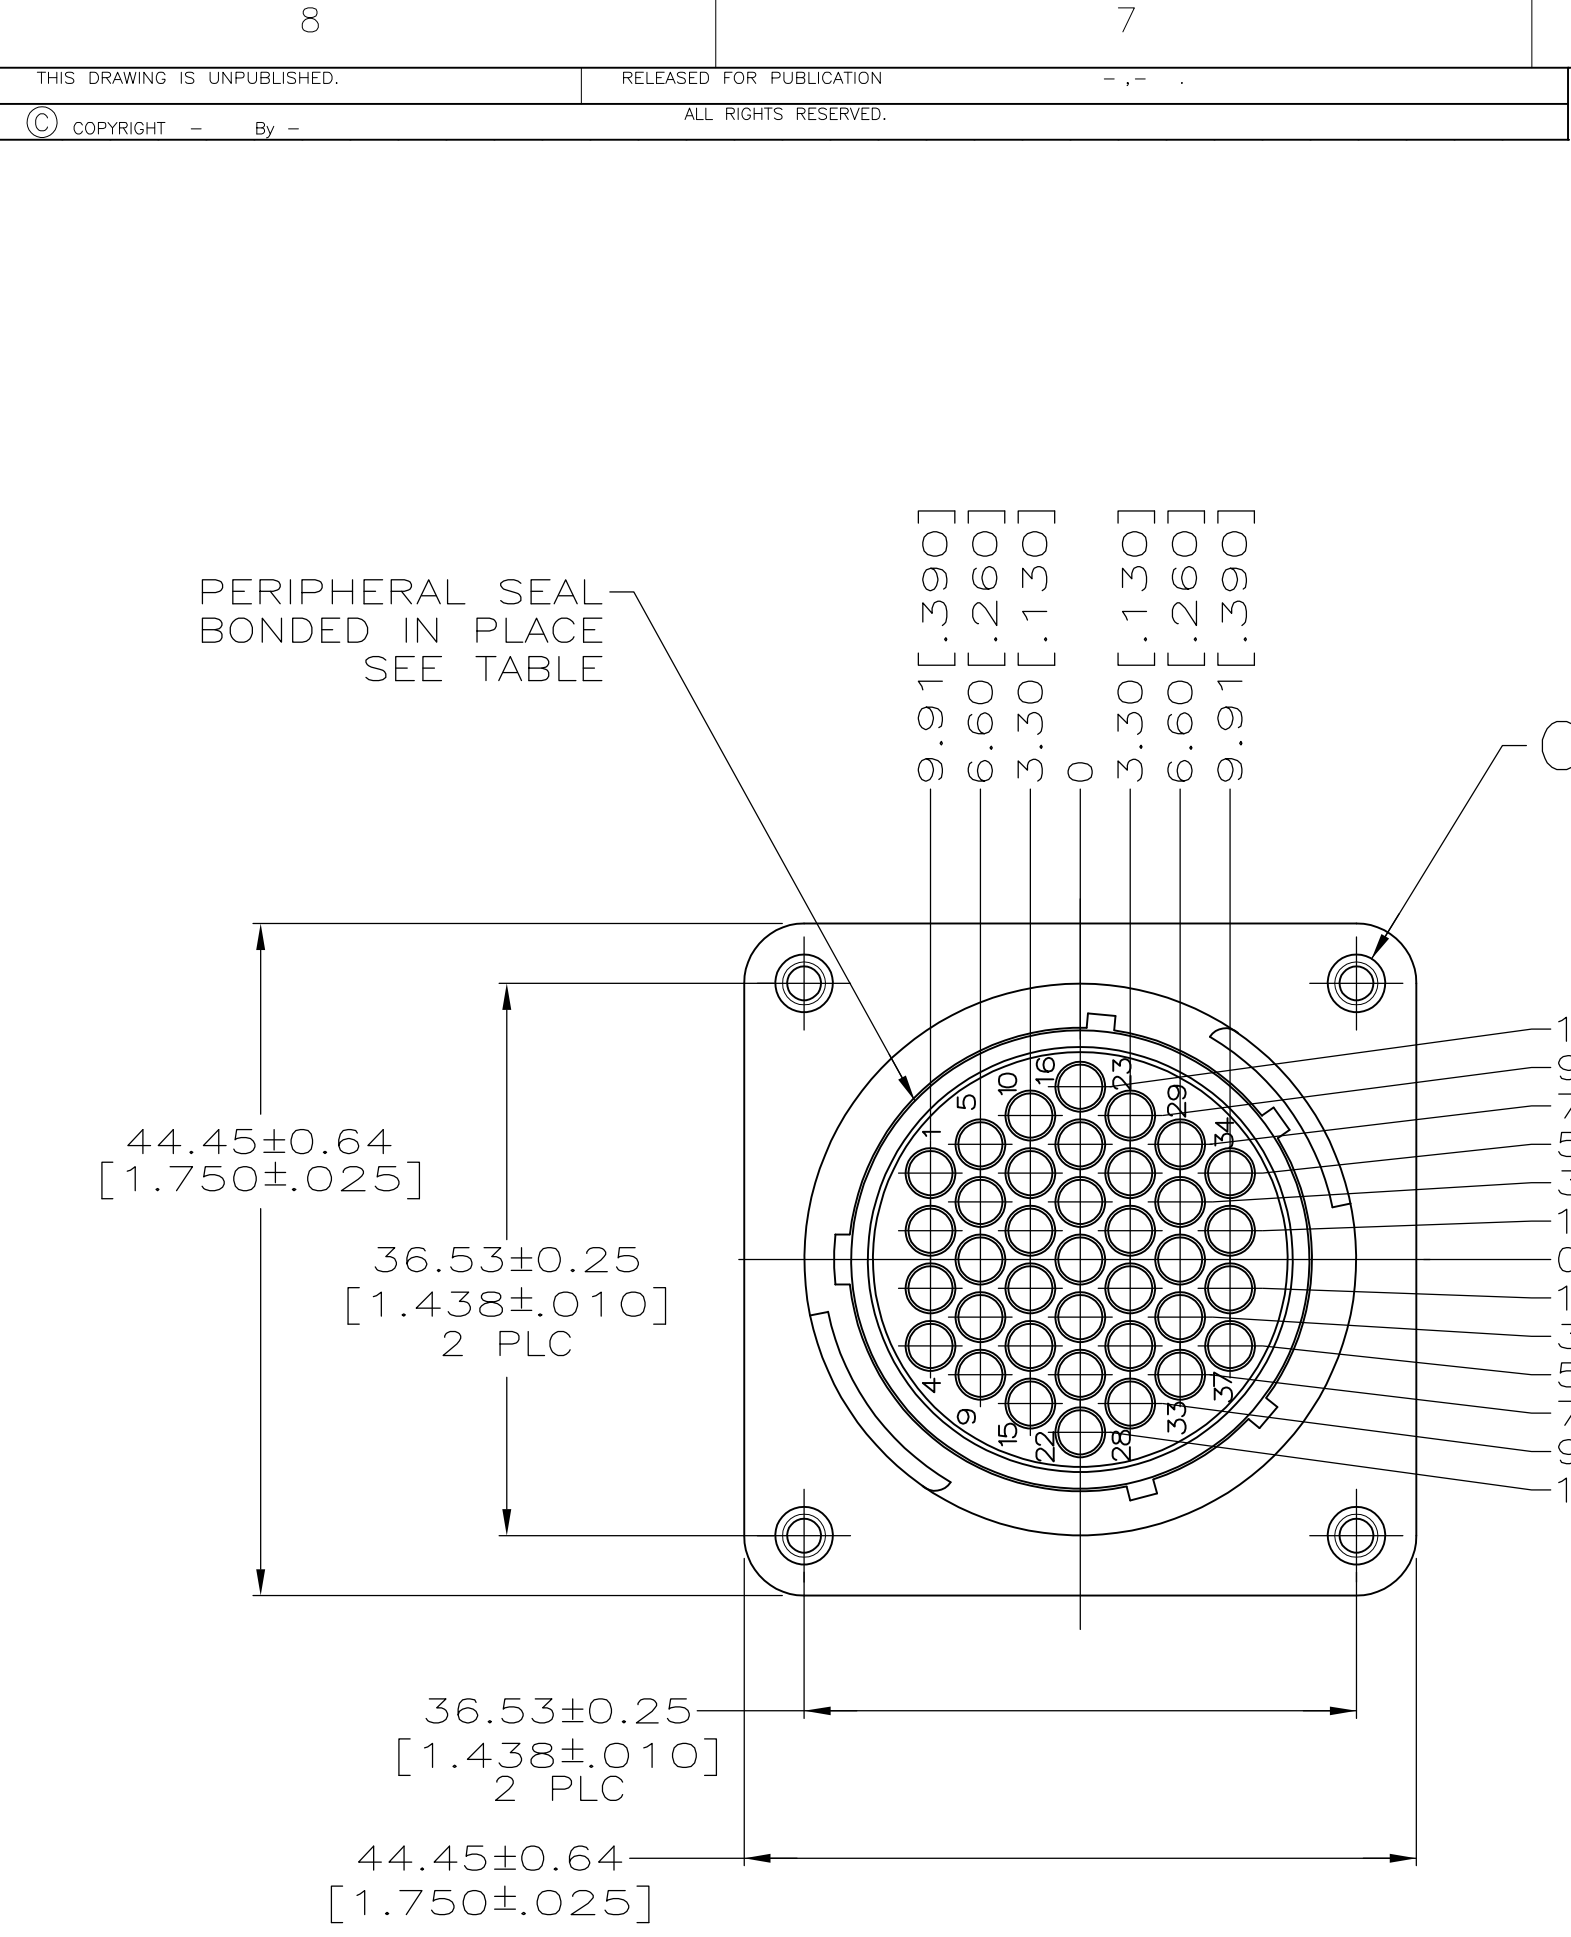


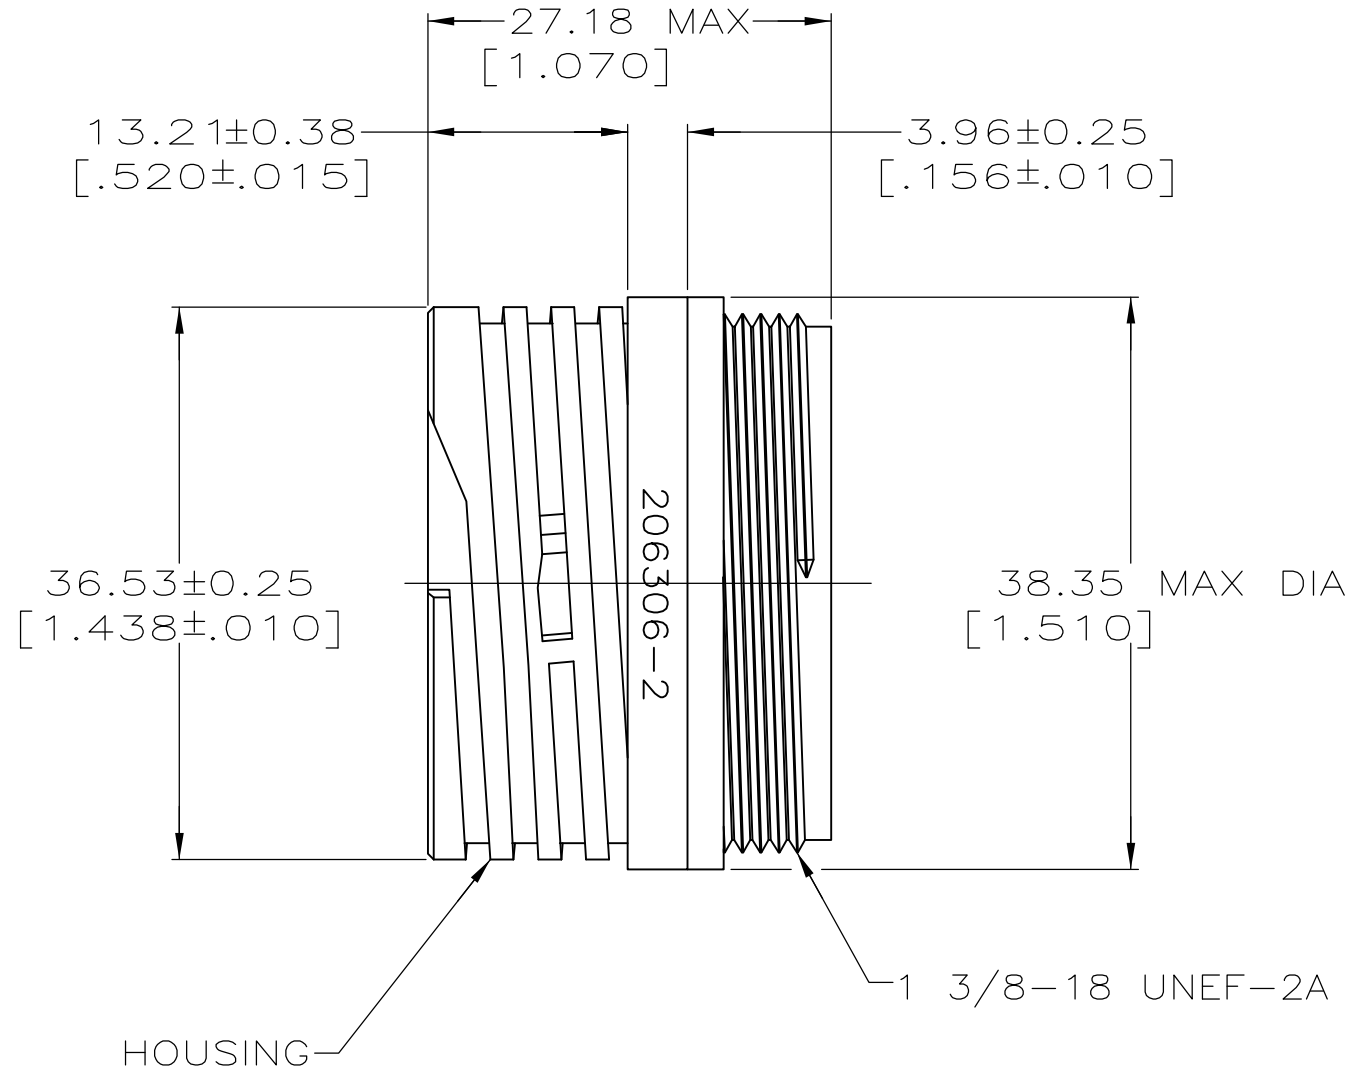

RECOMMENDED PANEL CUTOUT

DETAIL A

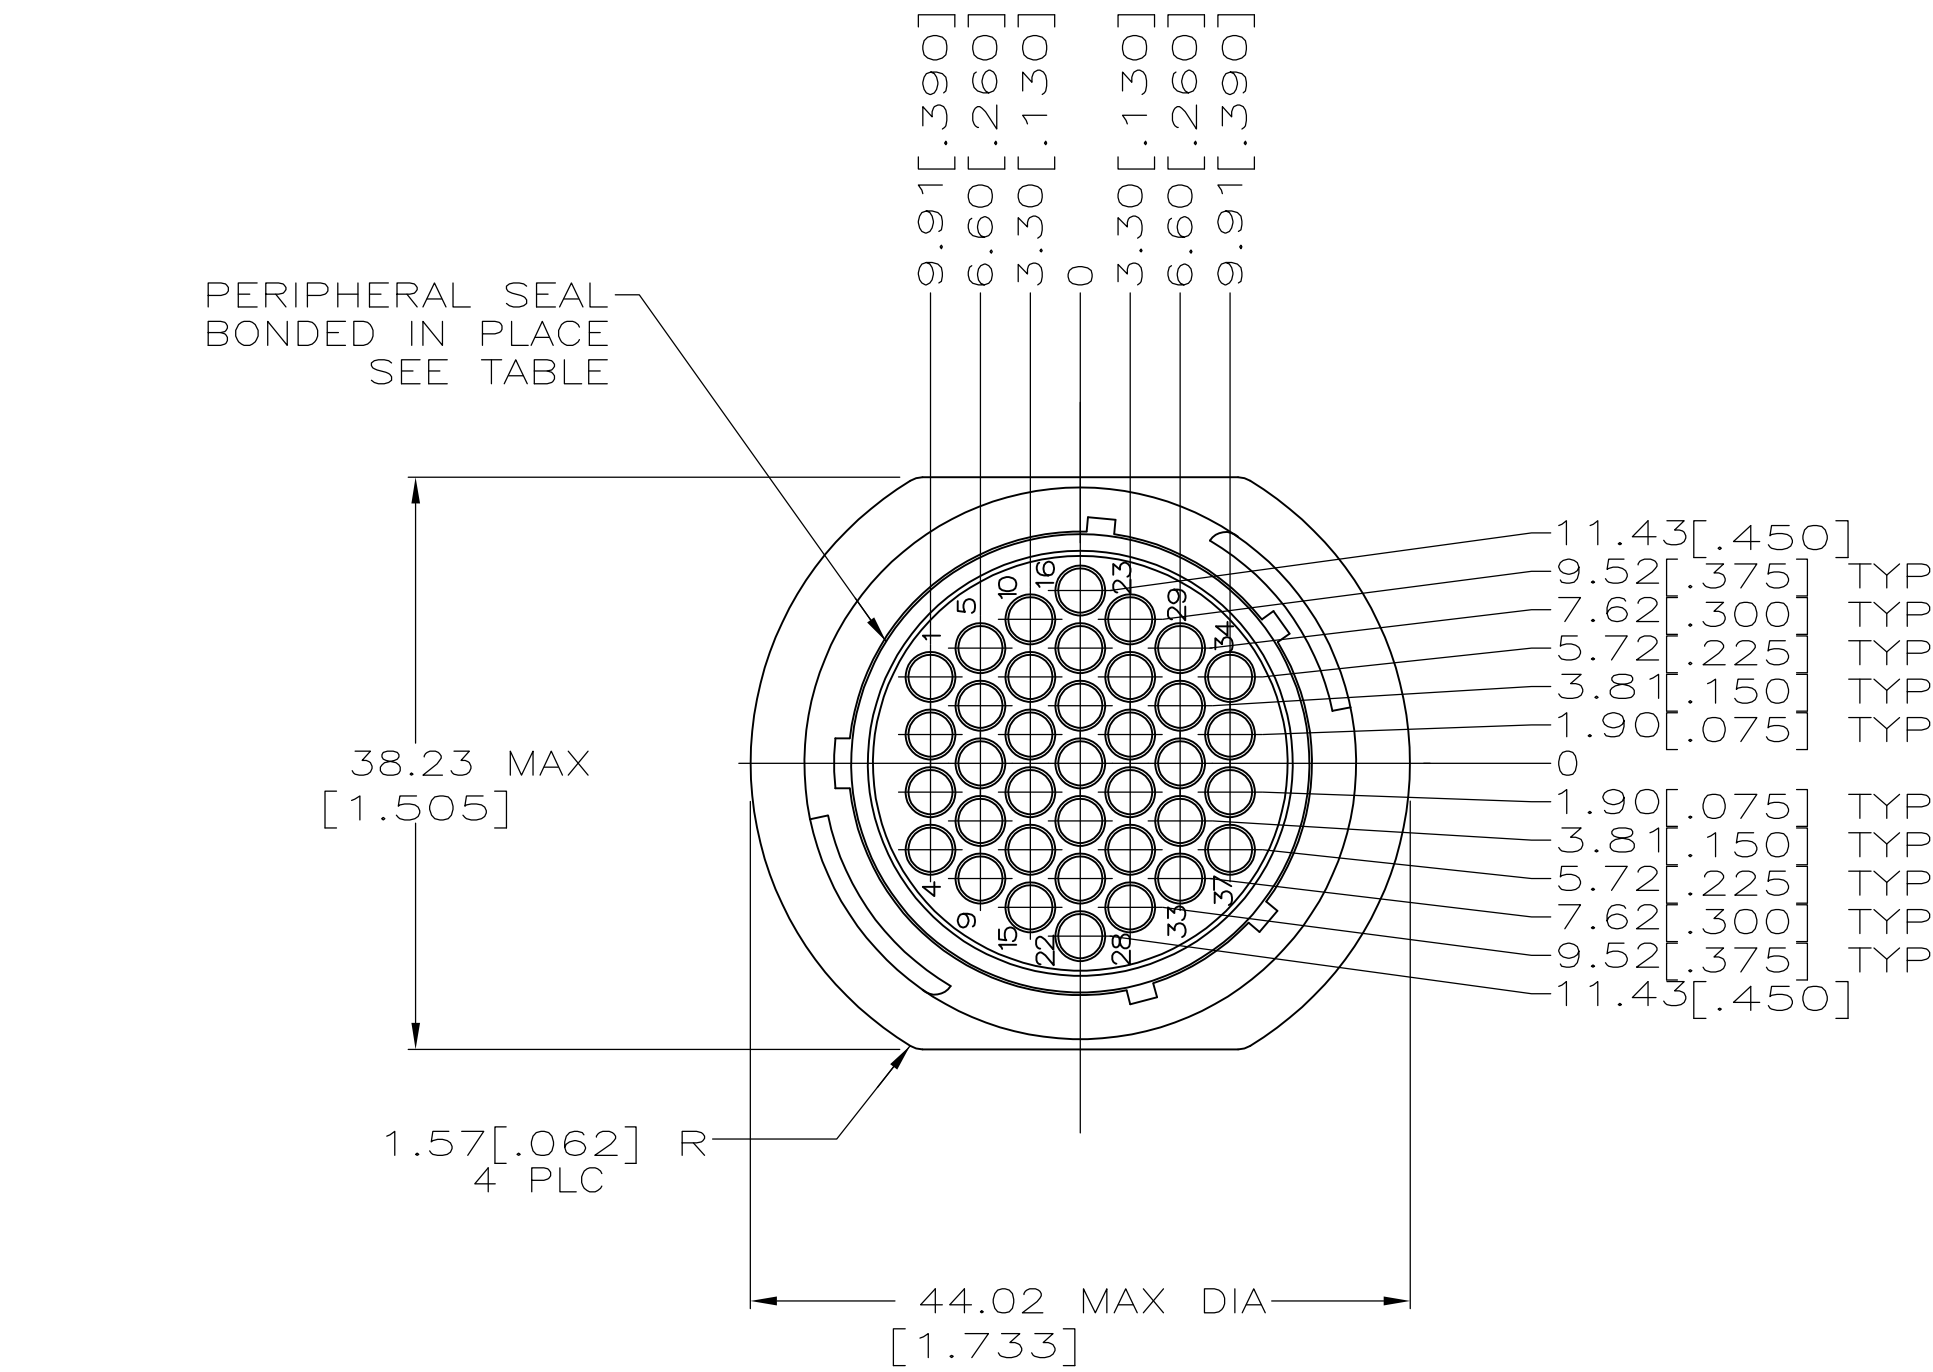

DETAIL B

- 1 CAVITY IDENTIFICATION ON FRONT AND REAR FACE.
- 2 WILL ACCEPT THIRTY-SEVEN (37) MULTIMATE SOCKET CONTACTS.
- 3 NO 4 FASTENER RECOMMENDED FOR MOUNTING.
- 4 NYLON 6/6, NATURAL.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

OBSOLETE 5	STANDARD	NO	3.81 [.150] DIA HOLE	A	4 206306-8
	SMALL PACK	NO	3.81 [.150] DIA HOLE	A	206306-6
	STANDARD	NO	4-40 THREADED INSERT	A	206306-5
	STANDARD	YES	-	B	206306-4
	STANDARD	YES	3.81 [.150] DIA HOLE	A	206306-3
	STANDARD	NO	-	B	206306-2
	STANDARD	NO	3.81 [.150] DIA HOLE	A	206306-1
	PACKAGING	PERIPHERAL SEAL	C	SEE DETAIL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.GELTZ CHK R.STONE APVD A.FRANTUM	07/26/93 08/11/93 08/13/93	TE Connectivity	
DIMENSIONS: MM [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± -		PRODUCT SPEC	
		1 PLC ± -		108-10024	
		2 PLC ± 0.13 [.005]		APPLICATION SPEC	
MATERIAL HOUSING: NYLON, BLACK INSERT: BRASS		FINISH -		SIZE A1	RESTRICTED TO
		WEIGHT 0.000000		CAGE CODE 00779	DRAWING NO 206306
		CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	L1	REVISED PER ECO-15-010630	27JUL2015	NK	MZ
	M	REVISED PER ECO-17-000037	15MAR2017	RS	MZ