


Pin Contacts, 3.5 mm Diameter

**Pin Contacts,
Mates with
3.5 mm Diameter
Socket Contacts**

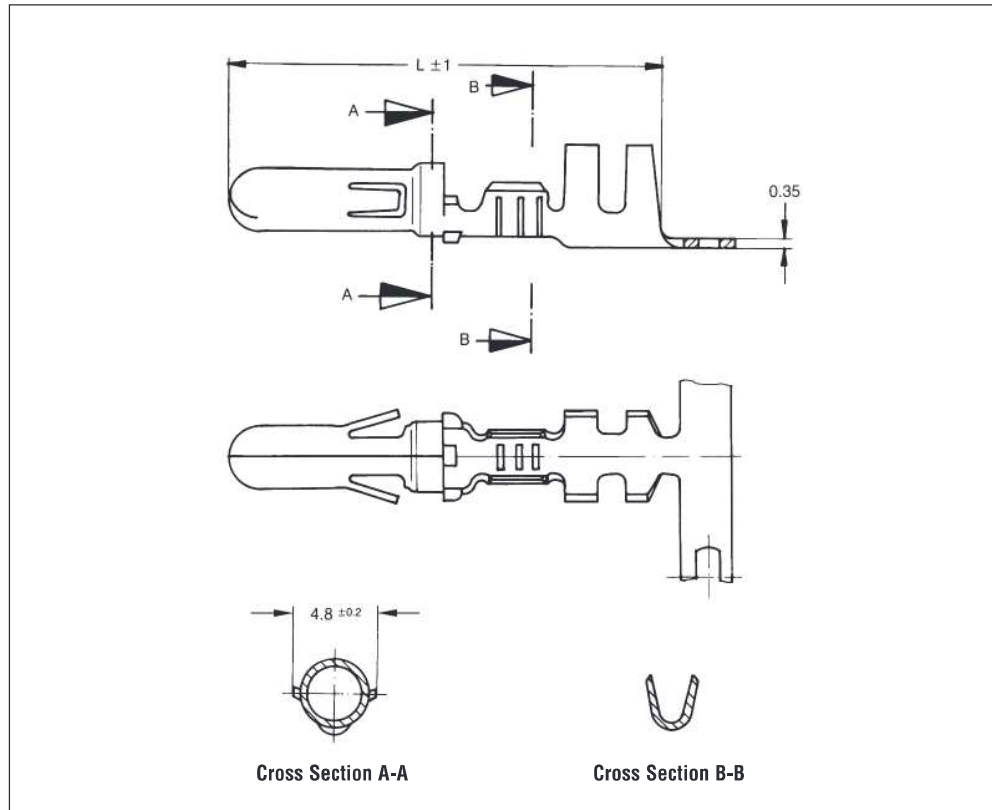

Pin Contacts

Wire Size Range (mm ²)	Insulation Diameter (mm)	Socket L (mm)	Material and Finish	Part Numbers				Applicator	Hand Tool
				Strip Form	Package Quantity	Loose-Piece	Package Quantity		
0.5–1.0	1.4–2.3	25.0	CuSn, pre-tin plated	927841-2	7,500	927842-2	2,000	1855490-x	2063577-1
0.5–1.5	1.2–2.4	25.0	CuZn, pre-tin plated	926988-1	7,500	926989-1	2,000	680331-x	2063535-1
			CuSn, pre-tin plated	926988-2	7,500	926989-2	2,000		
0.5–2.1	2.5–4.5	25.0	CuZn, pre-tin plated	925715-1	7,500	925660-1	500	1385797-x	2063535-1
			CuSn, pre-tin plated	925715-2	7,500	925660-2	500		
		25.0	St4 K 50, pre-tin plated	925715-5*	7,500	925660-5*	500		
		26.6	St4 K 50, pre-tin plated	925960-1**	7,500	925961-1**	500	on request	–
>1.0–2.5	2.1–3.1	25.0	CuSn, pre-tin plated	927858-2	7,500	927859-2	500	677829-x	–
	2.7–4.0	25.0	CuSn, pre-tin plated	927873-2	10,000	927874-2	500	680709-x	–
2.1–5.3	2.5–4.5	25.0	CuZn, pre-tin plated	925713-1	7,500	925662-1	500	680112-x	–
			CuSn, pre-tin plated	925713-2	7,500	925662-2	500		

*) For Ambient Temperatures up to +120 °C and 17 Ampere

***) Without Locking Lance