

Part number

# CKSHM 04



Male insert, CKSH series, SQUICH® spring terminal connection without tools, 4 poles + PE, 10 A 400 V 4 kV 3, size "21.21"


| Product description                    |                                                                                              | Material properties          |                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Insert                                                                                       | Main material                | Polycarbonate (PC)                                                             |
| Series                                 | CKSH                                                                                         | Other materials              | Contacts: copper alloy<br>Gasket: NBR                                          |
| Connection type                        | SQUICH® spring terminal connection without tools                                             | Colour                       | RAL 7032 grey                                                                  |
| Gender                                 | Male                                                                                         | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                            | 4 poles +  | China RoHs - EFUP            | 50                                                                             |
| Size                                   | Size "21.21"                                                                                 | REACH SVHC substances        | Yes<br>Lead                                                                    |
| Technical data                         |                                                                                              | SCIP number                  | 1a9c93ff-0445-4a16-81e3-1609ac5274d6                                           |
| Current                                | 10 A                                                                                         | Approvals / Standards        |                                                                                |
| Voltage                                | 400 V                                                                                        | Certifications               | DNV, BV, EAC, CQC                                                              |
| Rated impulse withstand voltage        | 4 kV                                                                                         | UL                           | ECBT2                                                                          |
| Pollution degree                       | 3                                                                                            | cUL                          | ECBT8                                                                          |
| Rated voltage according to UL/CSA      | 600 V                                                                                        | General ordering information |                                                                                |
| Wire cross-section                     | 0,14 mm² - 2,50 mm²                                                                          | EAN13 code                   | 8015747234627                                                                  |
| AWG size                               | 26 - 14                                                                                      | eCl@ss 8.1                   | 27440205                                                                       |
| Contact type                           | Turned silver plated                                                                         | ETIM 7.0                     | EC000438                                                                       |
| IP degree of protection                | IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure                              | Packaging Information        |                                                                                |
| Further technical details              |                                                                                              | Packaging length             | 226,00 mm                                                                      |
| Characteristics according to EN 61984  | 10A 400V 4kV 3; 10A 690V 4kV 2                                                               | Packaging height             | 245,00 mm                                                                      |
| Mating cycles                          | ≥ 500                                                                                        | Packaging width              | 155,00 mm                                                                      |
| Insulation resistance                  | ≥ 10 GΩ                                                                                      | Packaging weight             | 3,50 kg                                                                        |
| Contact resistance                     | ≤ 3 mΩ                                                                                       | Packaging volume             | 8,58 dm³                                                                       |
| Weight                                 | 16,00 g                                                                                      | Packaging description        | Carton box                                                                     |
| Operating temperature range (min, max) | -40 °C ... +125 °C                                                                           | Packaging quantity           | 200 Pcs                                                                        |
| Conductors stripping length            | 9...11 mm                                                                                    | Packaging EAN code           | 8015747234696                                                                  |
| UL 94 flammability rating              | V-0                                                                                          | Sub-packaging length         | 125,00 mm                                                                      |
| Tightening torque for fixing screws    | M3: 0,5 Nm; 4,4 lb.in (Ph1 or 0,8 x 5,5 mm)                                                  | Sub-packaging height         | 43,00 mm                                                                       |
|                                        |                                                                                              | Sub-packaging width          | 206,00 mm                                                                      |
|                                        |                                                                                              | Sub-packaging weight         | 0,70 kg                                                                        |
|                                        |                                                                                              | Sub-packaging volume         | 1,11 dm³                                                                       |
|                                        |                                                                                              | Sub-packaging description    | Carton tray                                                                    |
|                                        |                                                                                              | Sub-packaging quantity       | 40 Pcs                                                                         |
|                                        |                                                                                              | Sub-packaging EAN barcode    | 8015747234702                                                                  |

Part number

# CKSHM 04



## Catalogue drawings

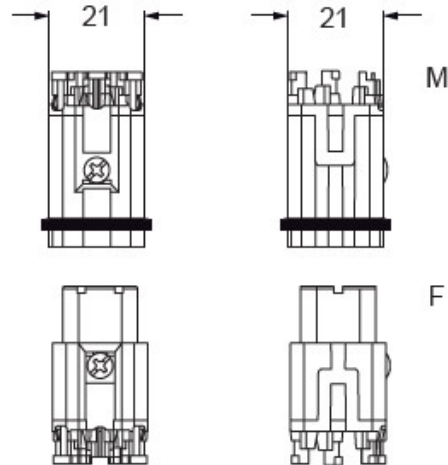


contacts side (front view)



## Derating curves

CKSH 04 poles connector inserts  
Maximum current load derating diagram

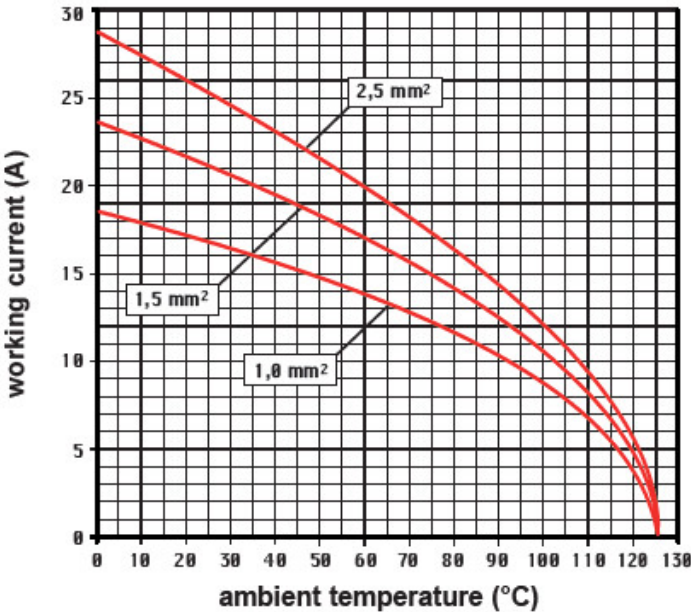

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

### California Proposition 65 Information



#### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### California Proposition 65 Information



#### WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

SQUICH® connection with actuator button



Reopening

---