

Bemerkung:

- 1

Zu verwendete Junior Power Timer Kontakte
(USED JUNIOR POWER TIMER CONTACTS)


0.5 — 1.0mm² AMP-Nr. 929 939 oder 927 770

>1.0 — 2.5mm² AMP-Nr. 929 937 oder 927 766
- 2



Zu verwendete Einzeladerabdichtung
(USED SCAT SEAL)

Isol. Ø 1.2 — 2.1 AMP-Nr. 828 904

Isol. Ø 2.2 — 3.0 AMP-Nr. 828 905

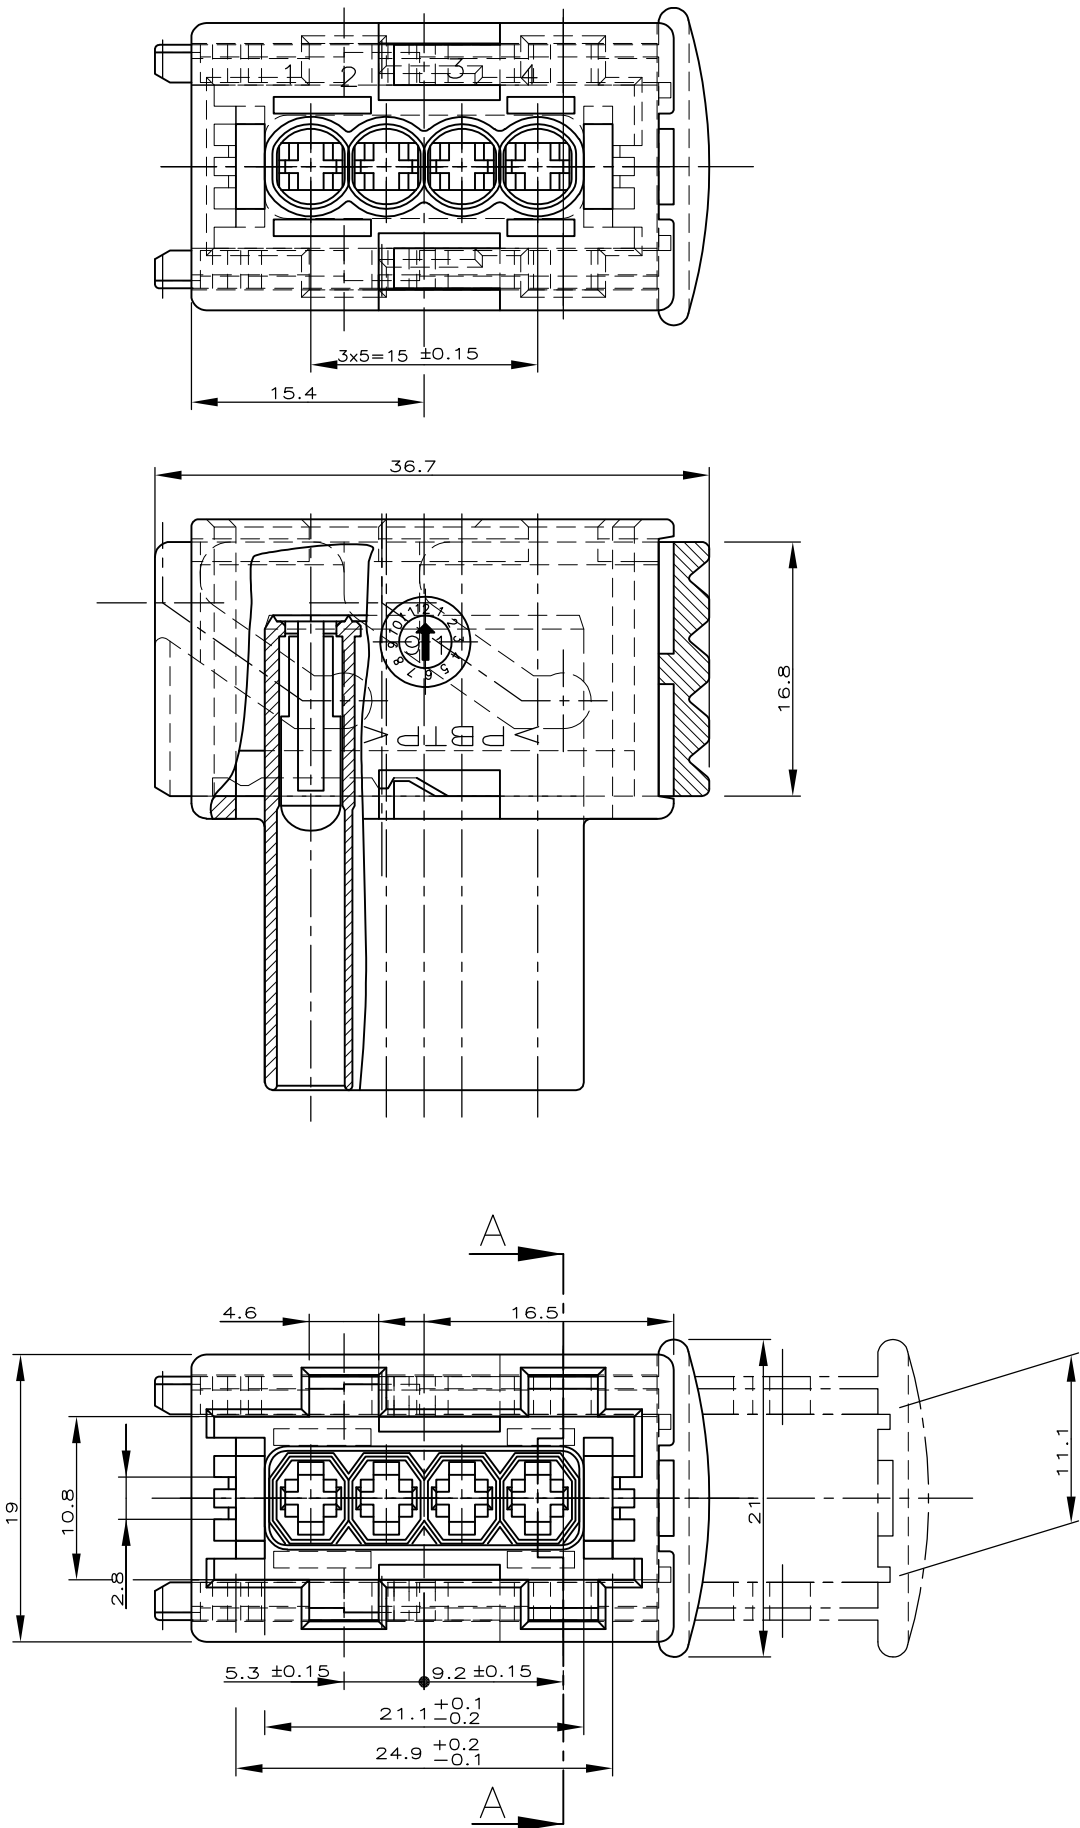

SCHNITT A-A

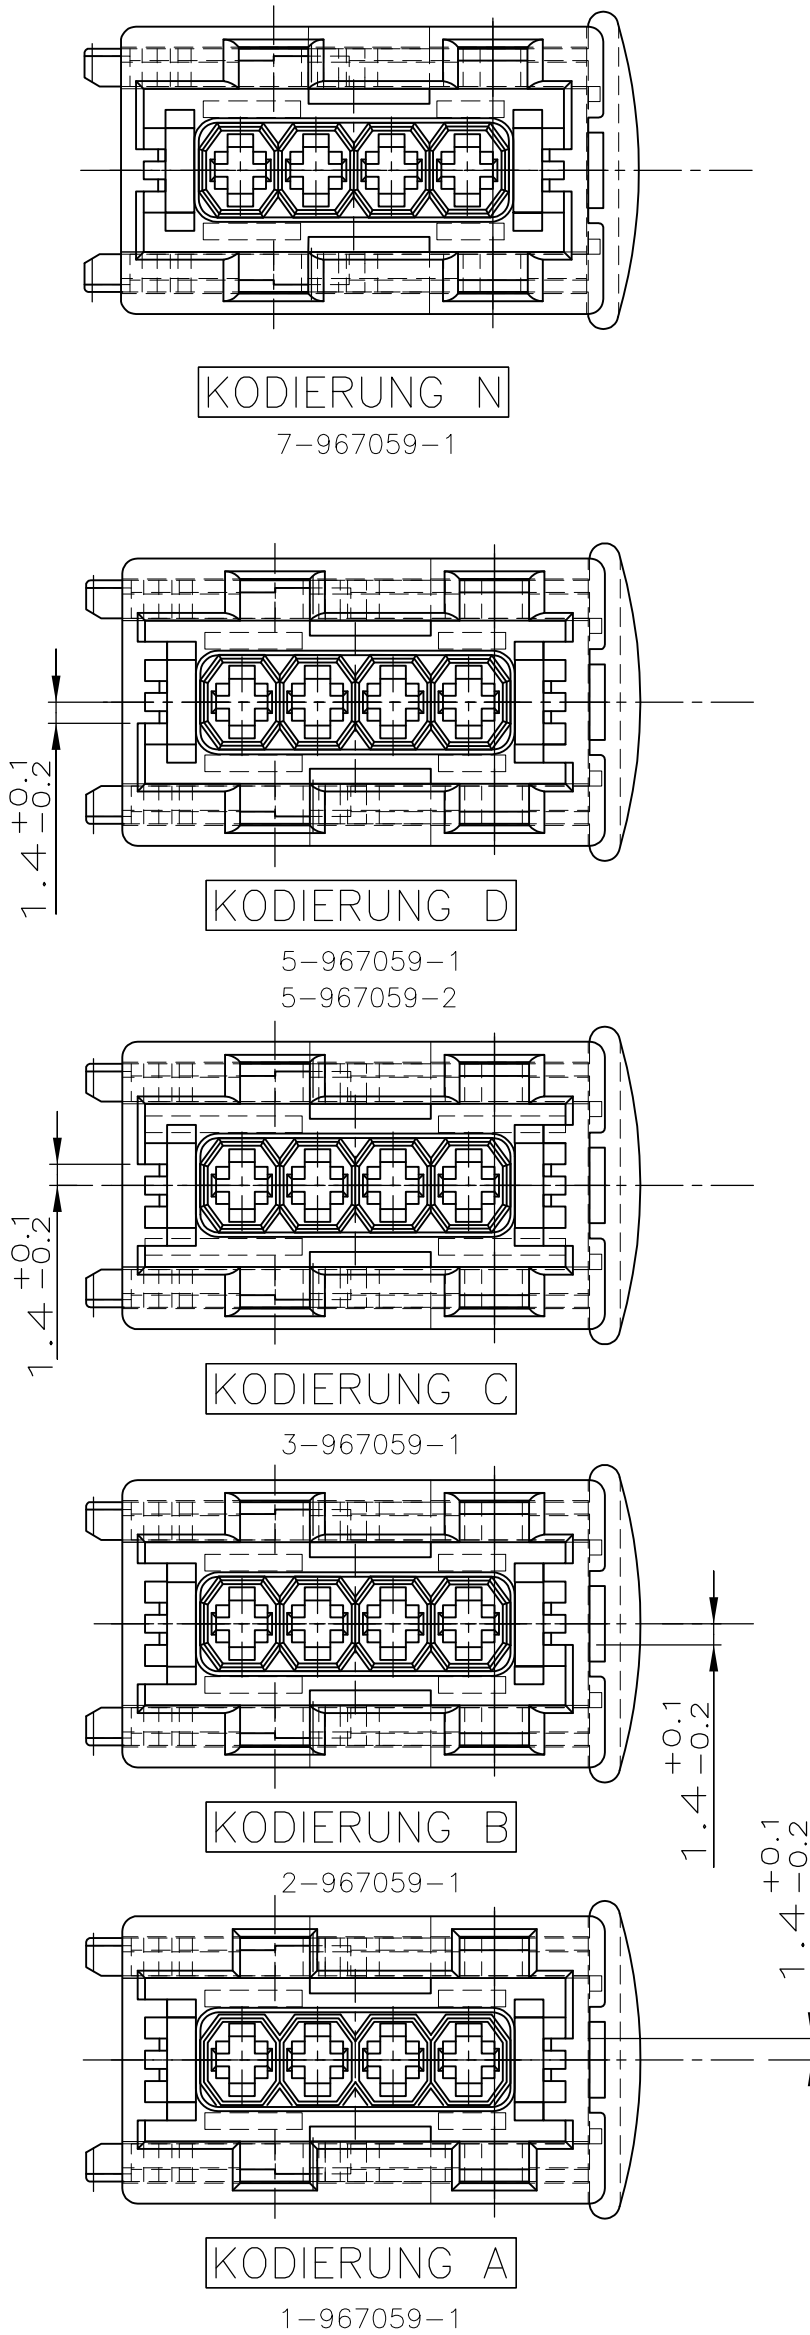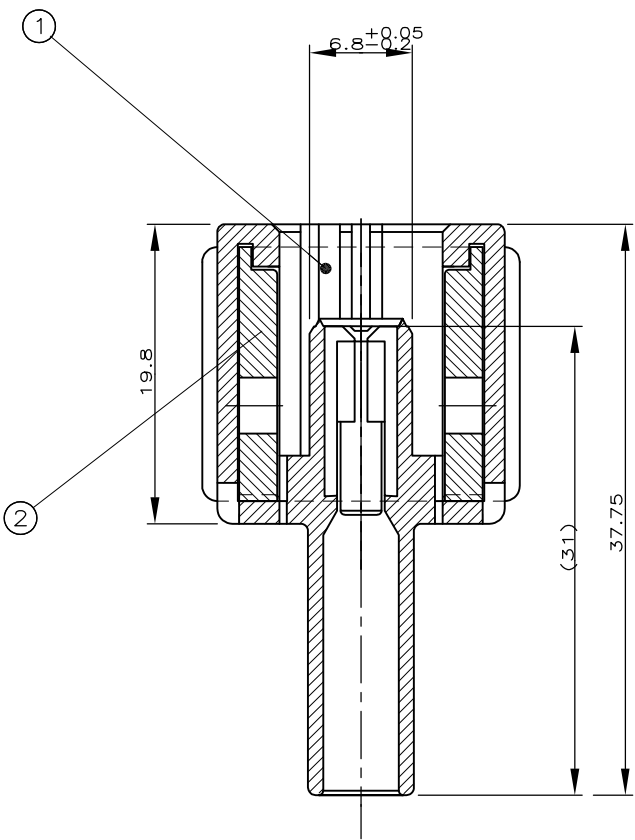

5-965261-1	N	7-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	weiß(WHITE)
4-965261-2	D	5-967059-2	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	grün (GREEN)
4-965261-1	D	5-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	braun(BROWN)
-	-	-	-	-	-	-	-
3-965261-1	C	3-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	blau(BLUE)
2-965261-1	B	2-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	grau(GREY)
1-965261-1	A	1-967059-1	2	1	SCHIEBER	PBT30%GV	rot (RED)
			1	1	4 POL. J-P-T GEH.	PBT30%GV	schwarz(BLACK)
PASSENDES STIFTGEHÄUSE	KODIERUNG	BESTELL-NR.	POS.	STÜCK	BENENNUNG EINZELTEIL	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB		THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS:	mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC ± -	
		1 PLC ± 0.3 MM	
		2 PLC ± -	
		3 PLC ± -	
		4 PLC ± -	
		ANGLES ± 1.5°	
MATERIAL	-	FINISH	-

DWN SCHWAEGER 12.01.93		CHK RYLL 12.01.93		APVD -		PRODUCT SPEC -		APPLICATION SPEC -		WEIGHT -		CUSTOMER DRAWING	
NAME		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO		SCALE		SHEET	
4 POL. J-P-T Gehaeuse (4 POS. J-P-T HSG. ASS'Y)		A2		00779		C=967059		1 of 1		REV		C1	