
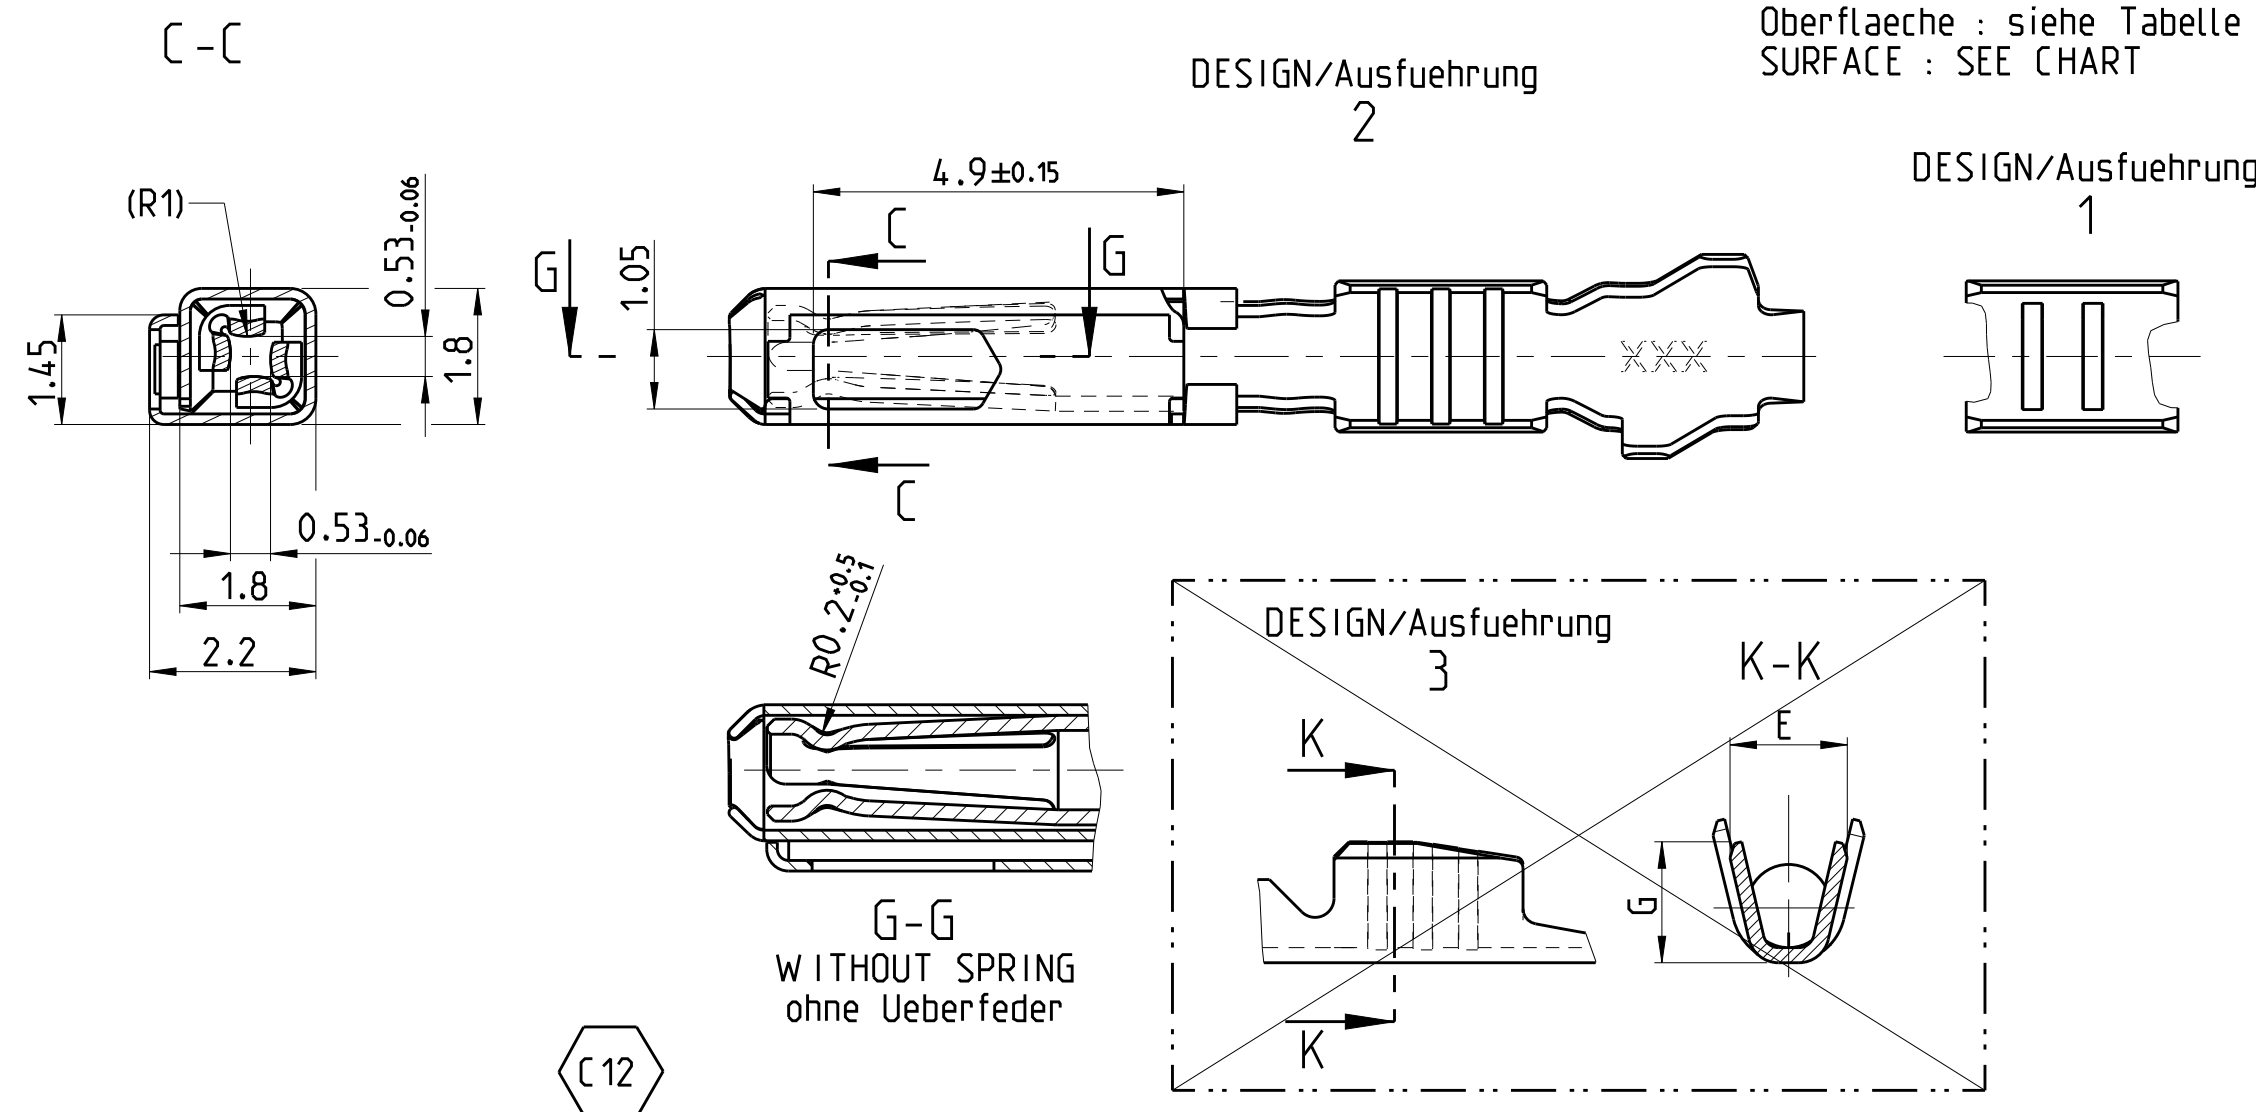
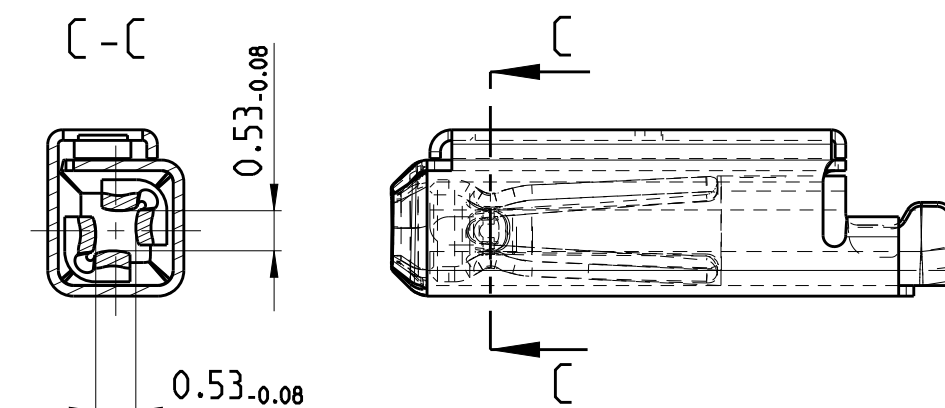
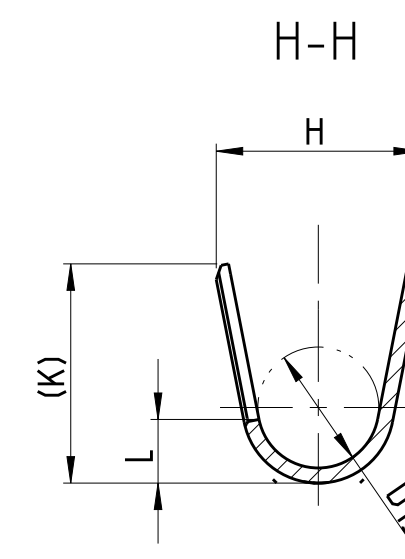
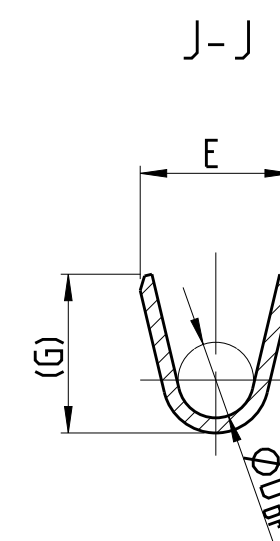




THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	2009
© COPYRIGHT 2009		ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APP
A1	-		C 9	ECR-13-015135	26SEP2013	Abr	Bruc
			C 10	NOTE 6 ADDED. ECR-15-007039	06MAY2015	Abr	Bruc
			C 11	See PCN E-19-011079	09DEC199	MAH.	BER
			C 12	See PCN E-20-001102	03SEP2020	MAH.	BER

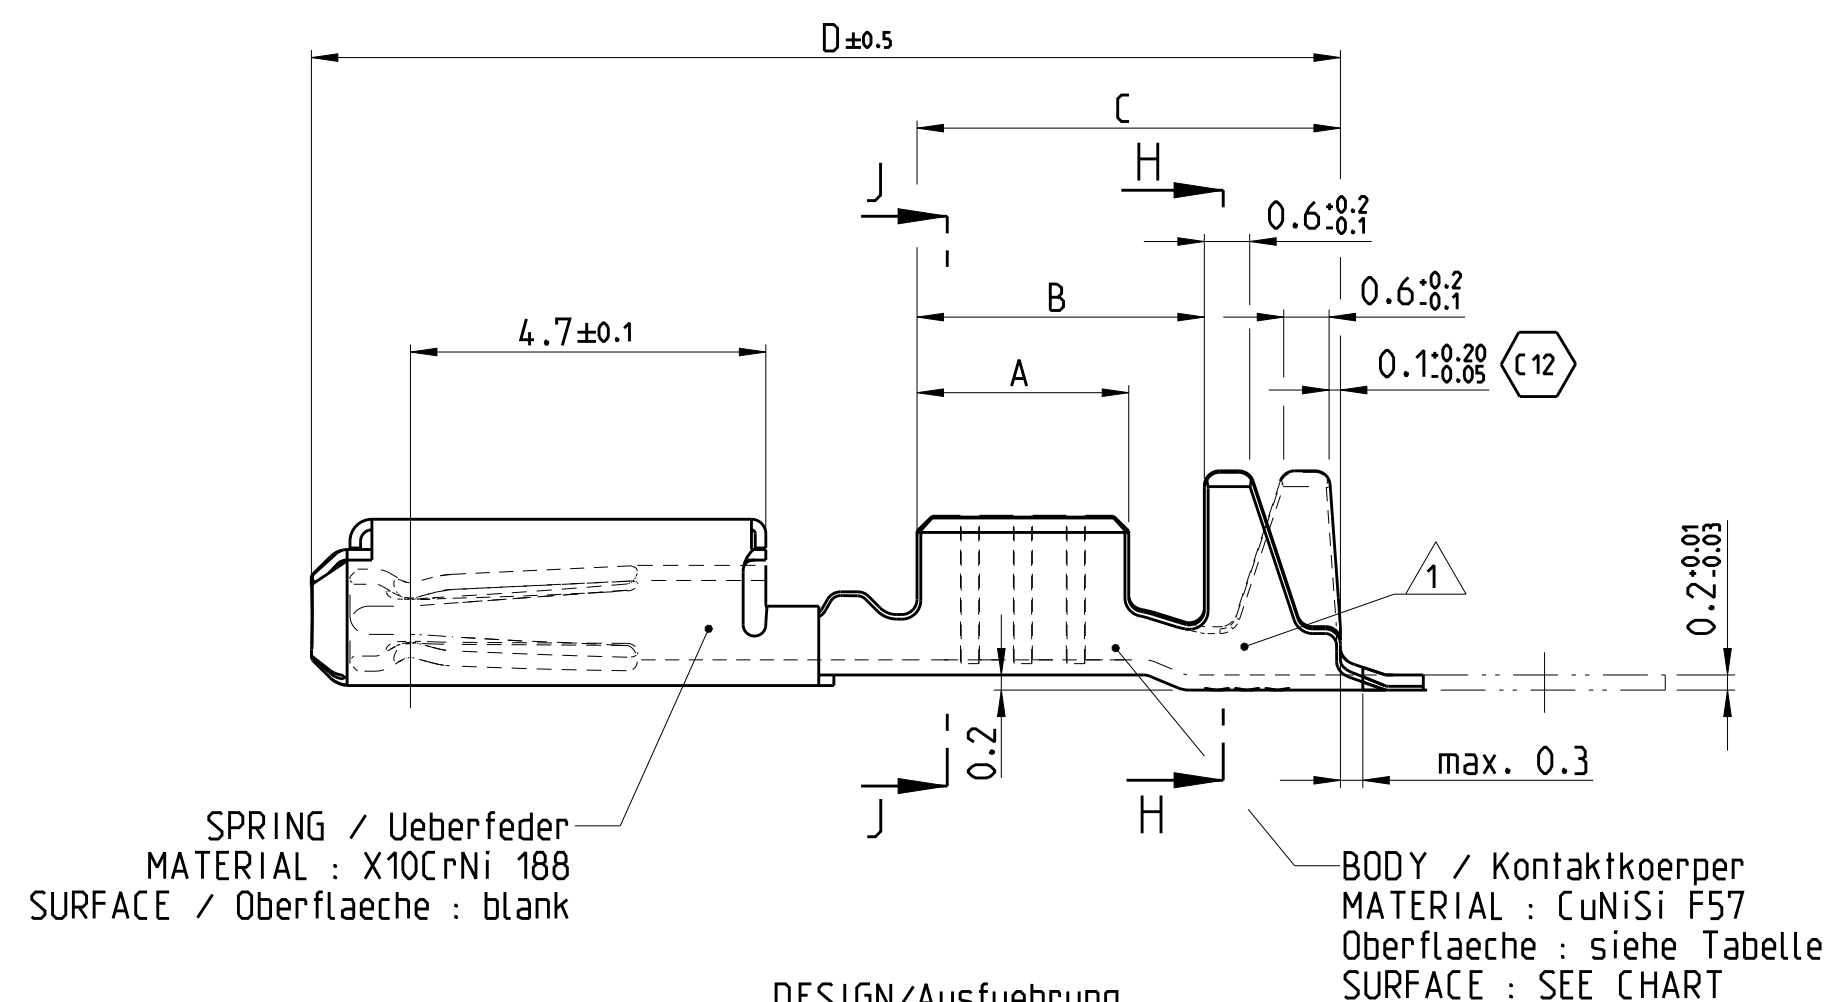

NOTES
Bemerkungen

- 1 DATE-CODE (WEEK/YEAR (E.G. WEEK NUMBER 30/ YEAR 2011)
AND TE REVISION (E.G. REV. A)
Datumscode (Woche / Jahr, z.B. KW30/ Jahr 2011)
und TE-Revision (z.B.Rev.A)
- 2 SUITABLE FOR PIN CONTACT SEE DRAWING: TE: 929453
Passend zu Stiftkontakt siehe Zeichnung: TE: 929453
- 3 DETAILS OF DESIGN ARE LEFT TO MANUFACTURER
Einzelheiten der Ausfuehrung bleiben dem Hersteller ueberlassen
- 4 FOR FLR-CONDUCTOR ACCORDING TO DIN 72551-6 ONLY
Nur fuer FLR-Leitung nach DIN 72551, Teil 6
- 5 NOT FOR NEW APPLICATION
nicht fuer Neuanwendung
- 6 Bei doppelt fallenden Werkzeugen wird die erste Ueberfeder
mit einer Kennzeichnung "- " versehen
WITH DOUBLE OUT DIES THE FIRST SPRING WILL BE PROVIDED
WITH AN INDICATION "- "



5-968221-6		A	 968221-6	A	0.5-0.75	Ag	A = 2.8 B = 3.8 C = 5.6 D = 13.7	E = 2 G = 2 D _{Dr} = 1	H= 2.7 K= 2.9 L = 0.7 D _{Iso} = 1.6
5-968221-5		A	 968221-5	C		Au			
5-968221-1		A	968221-1	C		Sn			
5-968220-6		A	 968220-6	C	0.25-0.35	Ag	A = 2.5 B = 3.6 C = 5.6 D = 13.7	E = 1.8 G = 1.8 D _{Dr} = 0.8	H= 2.3 K= 2.3 L = 0.6 D _{Iso} = 1.4
5-968220-5		A	 968220-5	C		Au			
5-968220-1		A	 968220-1	C		Sn			
	2208453-6	A			0.08-0.22	Ag	A = 2.5 B = 3.7 C = 5.4 D = 13.7		H = 2 K = 1.9 D _{Iso} = 1.1
	2208453-5	A				Au			
	2208453-1	A				Sn			
ORDER NO. DESIGN	ORDER NO. DESIGN	REV.	ORDER NO. DESIGN	REV.	WIRE SIZE RANGE	SURFACE	LENGTH	WIRE CRIMP	INSU. CRIMP
Bestell-Nr. Ausführung	Bestell-Nr. Ausführung		Bestell-Nr. Ausführung		DGB	Oberflaeche	Laenge	Drahtcrimp	Iso' crimp
2	3		1 		mm ²		DIMENSIONS/ Abmessungen mm		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Abraham.G.	06AUG2003	 TE Connectivity	
		CHK Kampmann.H.	07AUG2003		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ±0.2		MQS CLEAN BODY Productgroup Drawing Socket Contact Produktgruppenzeichnung, Buchsenkontakt	
		ANGLES FINISH ± 1°		APPLICATION SPEC 114 - 18021	
MATERIAL		WEIGHT		SIZE	CAGE CODE
-		-		A2	00779
		CUSTOMER DRAWING		DRAWING NO	RESTRICTED
				C=1355900	-
				SCALE 10:1	SHEET 1 OF 1
				REV 1	