
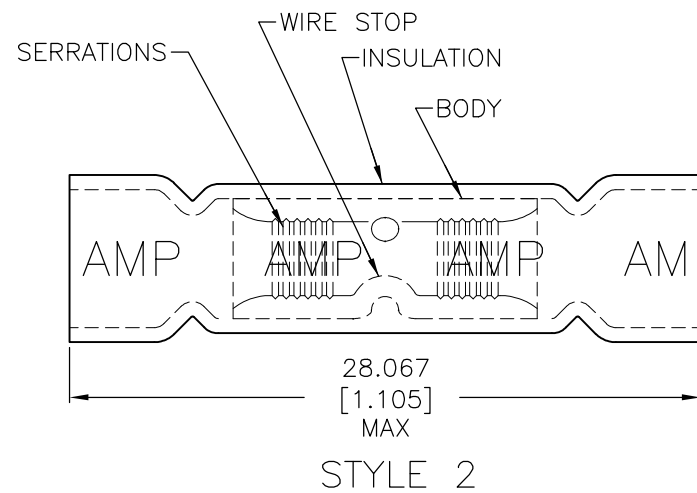


© - TE Connectivity. All Rights Reserved.

REVISIONS



P	LTR	DESCRIPTION	DATE	DWN	APVD
	M6	REVISED PER ECR-25-257161	18SEP2025	SA	DSC

AMP WIRE RANGE	 Listed FILE E13288	 LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

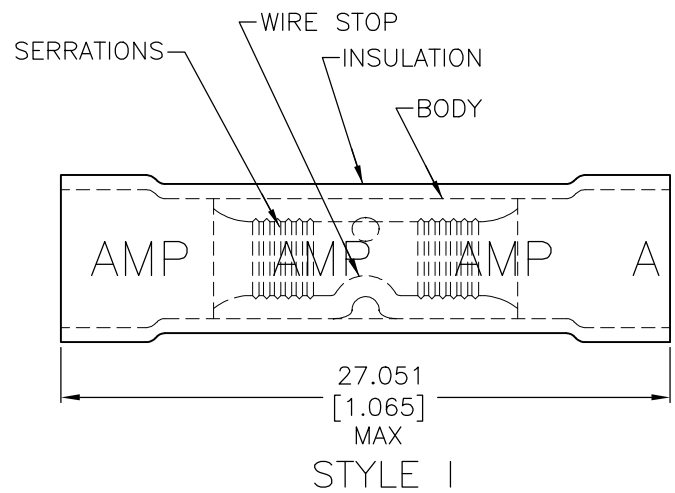

- 1 WIRE INSUL DIA,
2.921-4.318 [.115-.170]
- 2 NOTE DELETED

1	100	LOOSE PIECE, BOX	8-34071-1
1	1 KIT = 250 PIECES	LOOSE PIECE	6-34071-0
2	2500	ON TAPE, REEL	2-34071-3
2	1000	LOOSE PIECE	2-34071-2
1	2500	ON TAPE, REEL	2-34071-1
1	1000	LOOSE PIECE	34071
STYLE	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX. RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M ELLIS 19JUL95	 TE Connectivity				
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)	DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK C PRESNELL 19JUL95	NAME S BORTNER PRODUCT SPEC UL486A-B				
FOR APPLICATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	CIRCULAR MIL AREA: 1.04-2.62mm ² [2,050-5,180] SOLID OR STRANDED		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ± -	APVD S BORTNER 19JUL95	APPLICATION SPEC 114-2161				RESTRICTED TO
TOOLING INFORMATION	1-800-526-5142	MATERIAL BODY, CU ASTM B 152 INSULATION: PVC	FINISH BODY: TIN PLATE ASTM B545 INSULATION: COLOR-BLUE		WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-34071	SCALE 4:1	
FOR ORDER ENTRY	1-800-526-5142	THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		CUSTOMER DRAWING		SHEET 1 of 1		REV M6		