

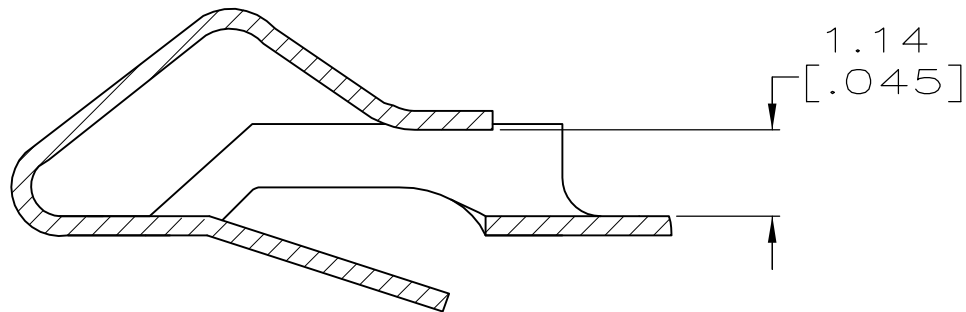
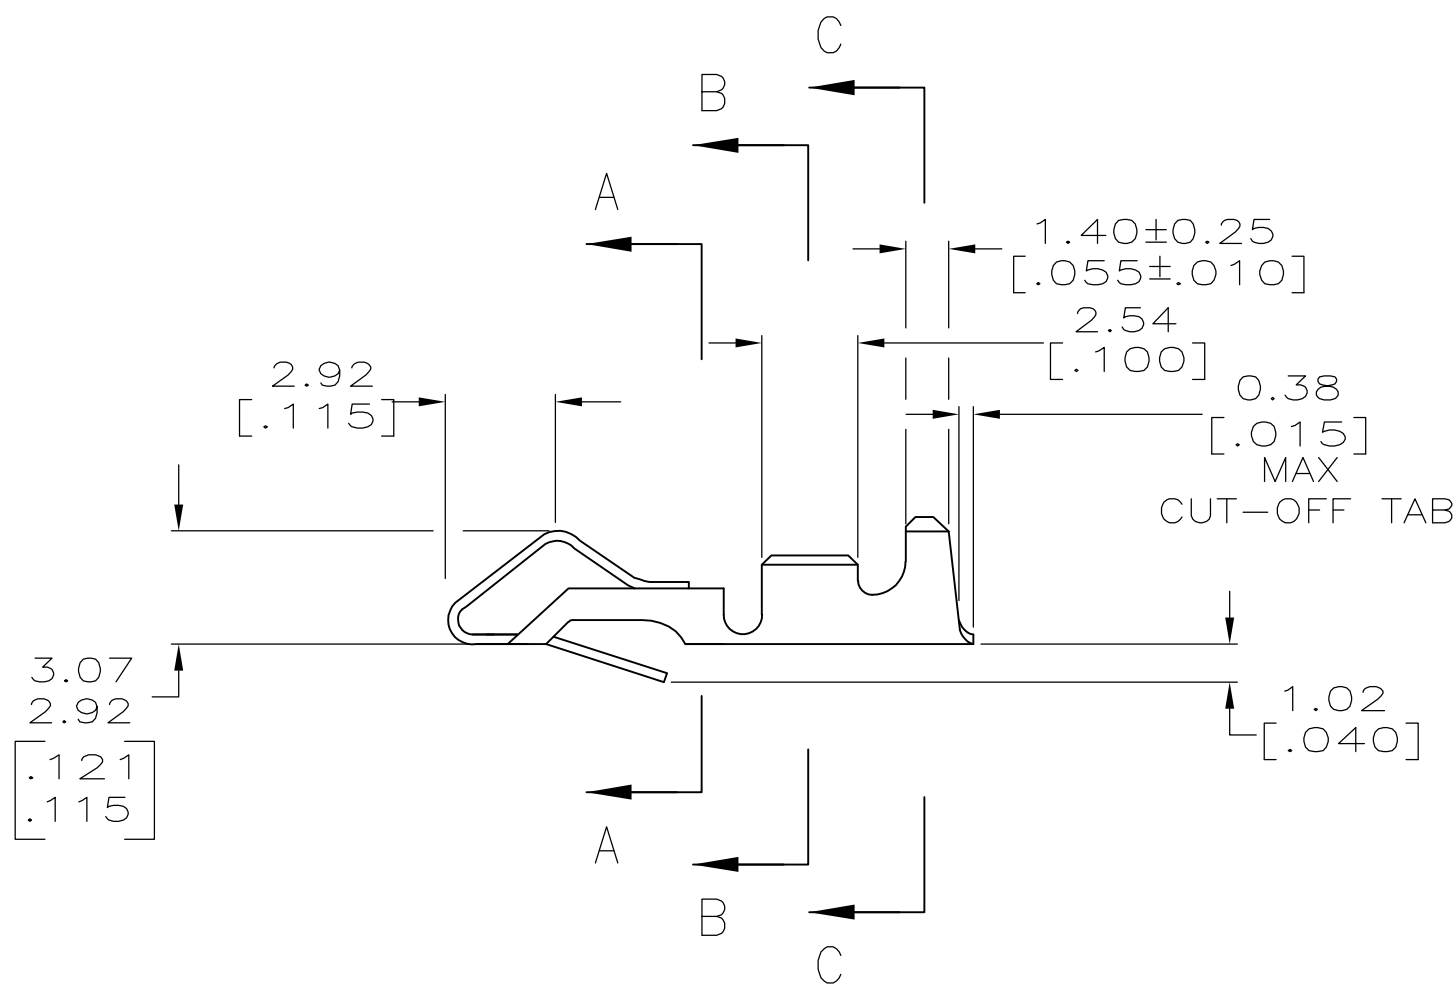


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	OWN	APVO
CM	00		E1	REVISED PER ECO-11-004820	11MAR11	RK	HMR


- 1 0.00203 [.000080] MIN BRIGHT TIN-LEAD OVER
0.00127 [.000050] MIN NICKEL.
- 2 0.00330 [.000130] MAX PRE-TIN.
- 3 WIRE RANGE: 0.2-0.9mm² (24-18 AWG).
INSULATION RANGE: 2.79 [.110] DIA MAX.
- 4 DIMENSIONS IN BRACKETS ARE IN INCHES.
- 5 0.00203 [.000080] MIN BRIGHT TIN OVER
0.00127 [.000050] MIN NICKEL.

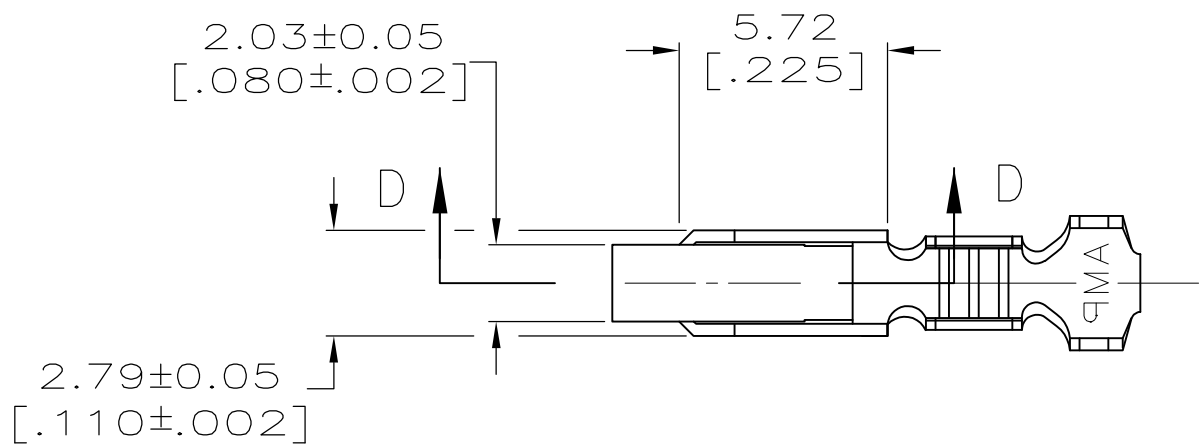


SECTION D-D
SCALE 10:1

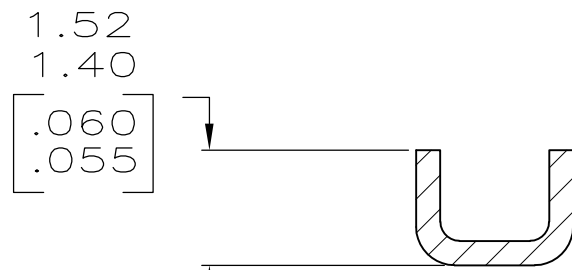

SECTION A-A
SCALE 10:1

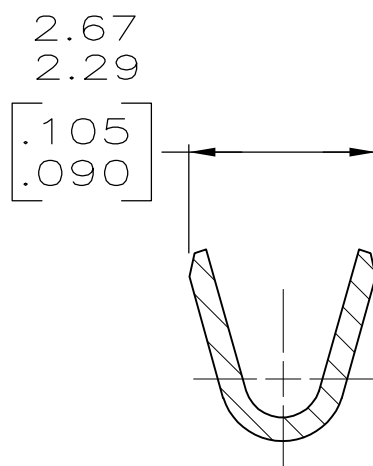

SECTION B-B
SCALE 10:1

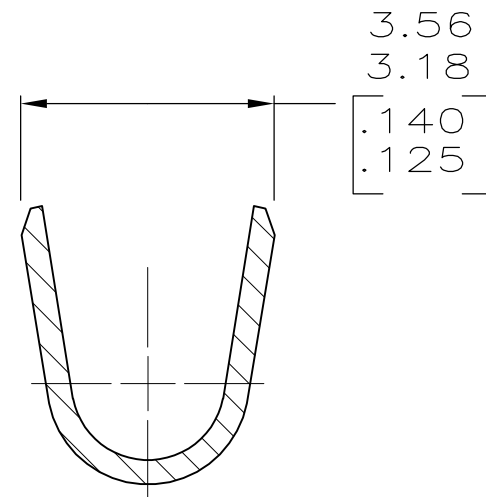

SECTION C-C
SCALE 10:1

5	3-640706-1
2	640706-2
1	640706-1
FINISH	PART NO

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. CARPENTER 21AUG2003		 TE Connectivity			
		CHK J. ELLIS 21AUG2003					
DIMENSIONS: INCHES		APVD J. ELLIS 21AUG2003		NAME RECEPTACLE, SL-156, LOOSE PIECE			
		PRODUCT SPEC					
		APPLICATION SPEC					
MATERIAL 0.33 [.013] BRASS		WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		CUSTOMER DRAWING		A2	00779	C-640706	—
SEE TABLE				SCALE	SHEET		REV
				5:1	1 of 1		E1